

JD-SB SERIES

PREMIUM AREA/SHOEBOX LUMINAIRE

PRODUCT DESCRIPTION

Introducing our **JD-SB Area Light/Shoebox Series**, the ultimate solution for replacing metal halide luminaires ranging from 100W to 1,000W. With its sleek profile design, it ensures optimal efficiency. Tailored to suit a variety of applications, it offers a wide range of lumen packages and an extensive selection of accessories, such as photocell receptacles, motion sensors, versatile mountings, and finish colors. This makes it the perfect choice for illuminating commercial parking lots, car dealerships, walkways, street lighting, and any other areas that require abundant, high-quality lighting.

STANDARD FEATURES

Construction and Materials

- Die-Cast Aluminum Alloy Housing and Epoxy Powder Coat Finish
- Polycarbonate Lens
- Equipped with 2' power cord standard

Optical System

- Type II, III, IV and V

Electrical System

- Primary Input Power: 60W / 100W / 150W / 200W / 300W / 400W
- Input Voltage: 120-277VAC / 277-480VAC
- Efficacy: 138 lm/W on average
- Power Factor: >0.95
- CRI: >70
- Operating Temp: -40°F to 176°F (-22°C to 113°C)
- Total Harmonic Distortion: <20%
- Integral Surge Protection: 10kV Standard / 20kV Optional

Dimming and Controls

- 0-10V Dimming Standard

Certifications and Compliance

- UL / DLC Premium Listed
- Ingress Protection: IP65 Suitable for Wet Locations
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated Emissions
- Complies with Dark Sky Requirements

Lifetime Based on TM21: L70 ≥ 143,000 / L80 ≥ 122,000 / L90 ≥ 73,000 Hrs

OPTIONAL FEATURES

- Slipfitter, Arm, and Trunnion Mounting Options
- Back and Side Shields
- Motion Sensor Remote Control
- 5-Pin NEMA Receptacle and Photocell



PHOTOCELL
OPTION



PHOTOCELL
RECEPTACLE
OPTION





MOTION SENSOR
WITH REMOTE CONTROL OPTION




PERFORMANCE SUMMARY

Primary Input Power	60W / 100W / 150W / 200W / 300W / 400W
Efficacy	138 lm/W on Average
Input Voltage	120-277VAC / 277-480VAC
CCT	3000K / 4000K / 5000K
IES Optic Type Options	Type II / III / IV / V
CRI	>70 Standard
Ingress Protection (IP)	IP65
Effective Projected Area	0.64 sq. Ft. - 60W/100W 0.65 sq. Ft. - 150W/200W 0.68 sq. Ft. - 300W/400W
Controls	0-10VDC Dimming Type Photocell and Motion Sensor with Remote Control optional
Construction	Die-Cast Aluminum Alloy Epoxy Powder Coat Finish Polycarbonate Lens
Lifetime Based on TM21	L70 ≥ 143,000 / L80 ≥ 122,000 / L90 ≥ 73,000 Hrs
Certifications & Compliance	RoHS / FCC / UL / DLC Premium Listed
Limited Warranty	10 Yrs

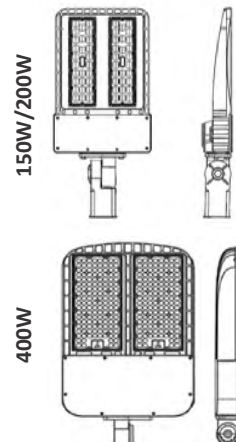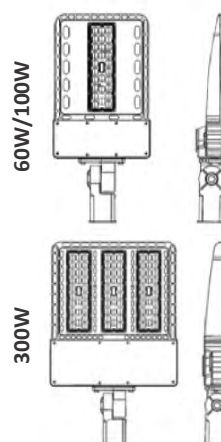

Information contained herein is subject to change without notice.
Revised 10/2023



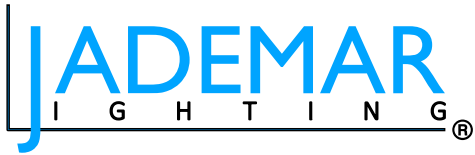

SPECIFICATION SUBMITTAL DETAIL

PROJECT NAME:	
MODEL NUMBER:	
DATE:	

JD-SB SERIES AREA/SHOE BOX LUMINAIRE


ORDERING INFORMATION / Example: **JD-SB-150W-H-50K-T3-PC-BMWO-BZ-SF**

JD-SB							
Product Series	Wattage	Input Voltage	CCT	CRI	Light Distribution	Dimming	Photocell Option
JD-SB	60W 100W 150W 200W 300W 400W	Blank 100-277VAC H 277-480VAC	40K 4000K 50K 5000K	Blank 70 CRI Standard 80 80 CRI * 90 90 CRI * <i>* Special Order</i>	T2 Type II T3 Type III T4 Type iV T5 Type V	Blank 0-10V Dimming Standard	Blank No Photocell PCR-5 5-Pin NEMA Photocell PCR-7 Receptacle 7-Pin NEMA Photocell Receptacle

Controls Options		Housing Colors
Blank	No Sensor	BZ Dark Bronze - RAL8040 Standard
BMWO	Bi-level Microwave Occupancy/Motion Sensor	CC Custom RAL Color - <i>Special Order - Replace CC with desired RAL Color</i>
SYNC-NLC	Synapse DLC Listed Wireless Control System	
CB-NLC	CASAMBI Bluetooth Control System	
SR-NLC	DLC Listed SIG Certified Silvalair BLE Mesh Network TruBlu Bluetooth Lighting	

FIELD INSTALLED OPTIONS

BMWO-RC	Remote control for motion sensor
PC3	3 Pin NEMA Type Photocell
PC3-H	3 Pin NEMA Type Photocell 480V
PC3-SC	Shorting Cap
IPC7	7 Pin Intelligent photocell with midnight step dimming feature (ANSI C136.41-2013 Twist Lock)
JD-SB-BSS-200	Back and side shield for 200W and below
JD-SB-BSS-300	Back and side shield for 300W
JD-SB-BSS-400	Back and side shield for 400W
JD-SB-SF	Slip fitter Mount
JD-SB-MA	Arm Mount 4" & 5" Square Pole
JD-SB-MA-RPA	Mounting arm with Round pole adaptor
JD-SB-TR	Trunnion for Wall Mount



NOTE LUMEN PERFORMANCE AND ELECTRICAL DATA SHOWN ON PAGE 3



JADEMAR JD-SB SERIES

AREA/SHOE BOX LUMINAIRE

LUMEN PERFORMANCE AND ELECTRICAL DATA

Model #			JD-SB-60W									JD-SB-100W									JD-SB-150W								
Wattage			60W									100W									150W								
Optic Type	CCT	Input Voltage	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID
Type 2	4000	120-277V	2	1	2	8,700	145	15	1	70	S-CEX2KW	3	1	2	13,500	135	15	1	70	S-HLG50X	3	1	3	21,300	142	15	1	70	S-LMVFY4P
	5000		2	1	2	8,700	145	15	1	70	S-QTKB3C	3	1	2	13,500	135	15	1	70	S-76IPZF	3	1	3	21,300	142	15	1	70	S-AJYHVDV
Type 3	4000		2	1	2	8,700	145	15	1	70	S-F83JV4	3	1	2	13,500	135	15	1	70	S-SRVDUFU	3	1	3	21,300	142	15	1	70	S-OXYQEN
	5000		2	1	2	8,700	145	15	1	70	S-PNY41J	3	1	2	13,500	135	15	1	70	S-FJYB8L	3	1	3	21,300	142	15	1	70	S-TJBN08
Type 4	4000		2	1	2	8,700	145	15	1	70	S-7YW09H	3	1	2	13,500	135	15	1	70	S-S01OVY	3	1	3	21,300	142	15	1	70	S-FJ65M2
	5000		2	1	2	8,700	145	15	1	70	S-XFTZE8	3	1	2	13,500	135	15	1	70	S-W8L3FG	3	1	3	21,300	142	15	1	70	S-9Z7S8C
Type 5	4000		2	1	2	8,700	145	15	1	70	S-YK4F9C	3	1	2	13,500	135	15	1	70	S-OJ7P9B	3	1	3	21,300	142	15	1	70	S-YET71V
	5000		2	1	2	8,700	145	15	1	70	S-GPFEY8	3	1	2	13,500	135	15	1	70	S-IYGJ0T	3	1	3	21,300	142	15	1	70	S-X8FVK8
Model #			JD-SB-60W-H									JD-SB-100W-H									JD-SB-150W-H								
Primary Input Power			60W									100W									150W								
Optic Type	CCT	Input Voltage	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID
Type 2	4000	200-480V	2	1	1	7,200	120	15	1	80	S-XZ5783	2	1	2	12,000	120	15	1	70	S-Y7APHE	3	1	3	19,500	130	15	1	70	S-XMRTOQ
	5000		2	1	1	7,320	122	15	1	80	S-OMT17J	2	1	2	12,200	122	15	1	70	S-518JWG	3	1	3	19,500	130	15	1	70	S-2MVHWJ
Type 3	4000		2	1	1	7,200	120	15	1	80	S-ADUH4O	2	1	2	12,000	120	15	1	70	S-JXNYCE	3	1	3	19,500	130	15	1	70	S-KTE57P
	5000		2	1	1	7,320	122	15	1	80	S-FHCVQE	2	1	2	12,200	122	15	1	70	S-QE2PYB	3	1	3	19,500	130	15	1	70	S-VLJS6F
Type 4	4000		2	1	1	7,200	120	15	1	80	S-MJ2GUH	2	1	2	12,000	120	15	1	70	S-BRHOQF	3	1	3	19,500	130	15	1	70	S-WEOLFS
	5000		2	1	1	7,320	122	15	1	80	S-1D6X7J	2	1	2	12,200	122	15	1	70	S-2MZ1XN	3	1	3	19,500	130	15	1	70	S-ILNK8C
Type 5	4000		2	1	1	7,200	120	15	1	80	S-K3WC4Y	2	1	2	12,000	120	15	1	70	S-12W6V5	3	1	3	19,500	130	15	1	70	S-OEOH8M
	5000		2	1	1	7,320	122	15	1	80	S-SUWV75	2	1	2	12,200	122	15	1	70	S-VZC06Y	3	1	3	19,500	130	15	1	70	S-2PF3N7

Model #			JD-SB-200W										JD-SB-300W										JD-SB-400W									
Wattage			200W										300W										400W									
Optic Type	CCT	Input Voltage	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID			
Type 2	4000	120-277V	4	2	3	27,000	135	15	1	70	S-4I2GOV	5	2	4	40,500	135	15	1	70	S-TSEQ6B	5	2	5	56,800	142	15	1	70	S-Z61FCW			
	5000		4	2	3	27,000	135	15	1	70	S-RWQ5VG	5	2	4	40,500	135	15	1	70	S-N9XVR7	5	2	5	56,800	142	15	1	70	S-YESGOK			
Type 3	4000		4	2	3	27,000	135	15	1	70	S-R6CZKQ	4	1	4	40,500	135	15	1	70	S-5HRQC8	5	2	5	56,800	142	15	1	70	S-NZ0TDQ			
	5000		4	2	3	27,000	135	15	1	70	S-O6BXTK	4	1	4	40,500	135	15	1	70	S-O801PZ	5	2	5	56,800	142	15	1	70	S-ZY0PT5			
Type 4	4000		4	2	3	27,000	135	15	1	70	S-J625YI	4	2	3	40,500	135	15	1	70	S-RX1A30	5	2	5	56,800	142	15	1	70	S-JYIK4D			
	5000		4	2	3	27,000	135	15	1	70	S-R83PGF	4	2	3	40,500	135	15	1	70	S-MJA4XN	5	2	5	56,800	142	15	1	70	S-NS3L26			
Type 5	4000		4	2	3	27,000	135	15	1	70	S-E6C4PI	5	2	3	40,500	135	15	1	70	S-LTZOPX	5	2	5	56,800	142	15	1	70	S-ZGX1O2			
	5000		4	2	3	27,000	135	15	1	70	S-8P12R3	5	2	3	40,500	135	15	1	70	S-OR2ZDU	5	2	5	56,800	142	15	1	70	S-YPDLZ2			
Model #			JD-SB-200W-H										JD-SB-300W-H										JD-SB-400W-H									
Primary Input Power			200W										300W										400W									
Optic Type	CCT	Input Voltage	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID	B	U	G	Lumen	Efficacy	THD	PF	CRI	DLC Product ID			
Type 2	4000	277-480V	3	1	3	24,000	120	15	1	70	S-ZEGBUX	5	2	4	42,000	140	15	1	70	S-9YPBM5	5	2	5	56,800	142	15	1	70	S-A3SP80			
	5000		3	1	3	24,400	122	15	1	70	S-AFUCLQ	5	2	4	42,600	142	15	1	70	S-E64TXV	5	2	5	56,800	142	15	1	70	S-LQ8M09			
Type 3	4000		3	1	3	24,000	120	15	1	70	S-POZBVQ	5	2	5	42,000	140	15	1	70	S-KSV6HG	5	2	5	56,800	142	15	1	70	S-2F6C9P			
	5000		3	1	3	24,400	122	15	1	70	S-UVB1LO	5	2	5	42,600	142	15	1	70	S-13TI2A	5	2	5	56,800	142	15	1	70	S-VC7Q2P			
Type 4	4000		3	1	3	24,000	120	15	1	70	S-CKZQ86	5	2	4	42,000	140	15	1	70	S-7QS6JT	5	2	5	56,800	142	15	1	70	S-WM6ST7			
	5000		3	1	3	24,400	122	15	1	70	S-12DL7P	5	2	4	42,600	142	15	1	70	S-8G5SJZ	5	2	5	56,800	142	15	1	70	S-G6IABF			
Type 5	4000		3	1	3	24,000	120	15	1	70	S-HZ8J24	5	2	4	42,000	140	15	1	70	S-NUMBPO	5	2	5	56,800	142	15	1	70	S-1Z2JBW			
	5000		3	1	3	24,400	122	15	1	70	S-6DM8RP	5	2	4	42,600	142	15	1	70	S-3LWBS6	5	2	5	56,800	142	15	1	70	S-RZL2QD			


ELECTRICAL LOAD - Current Voltage (AMP)													
Model Number	120V	208V	240V	277V	347V	480V	Model Number	120V	208V	240V	277V	347V	480V
JD-SB-60W	0.5	0.29	0.25	0.22	0.17	0.13	JD-SB-200W	1.67	0.96	0.83	0.72	0.58	0.42
JD-SB-100W	0.83	0.48	0.42	0.36	0.29	0.21	JD-SB-300W	2.5	1.44	1.25	1.08	0.86	0.63
JD-SB-150W	1.25	0.72	0.62	0.54	0.43	0.31	JD-SB-400W	3.75	2.16	1.88	1.62	1.29	0.95



JADEMAR JD-SB SERIES


AREA/SHOE BOX LUMINAIRE

EPA/WEIGHT CONFIGURATIONS




A-11.15" x B-23.92" x C-3.35"

JD-SB-60W / JD-SB-100W		GROSS WEIGHT		12 lbs	BOX DIMENSION		22.44" x 13.78" x 5.91"
CONFIGURATION							
EPA	0.64 ft ²	1.28 ft ²	1.03 ft ²	1.66 ft ²	1.55 ft ²	2.06 ft ²	
NET WEIGHT	9.9 lbs	19.8 lbs	19.8 lbs	29.7 lbs	29.7 lbs	39.6 lbs	




A-11.15" x B-23.4" x C-3.35"

JD-SB-150W / JD-SB-200W		GROSS WEIGHT		18 lbs	BOX DIMENSION		22.44" x 13.78" x 5.91"
CONFIGURATION							
EPA	0.65 ft ²	1.30 ft ²	1.04 ft ²	1.69 ft ²	1.56 ft ²	2.08 ft ²	
NET WEIGHT	16.6 lbs	33.2 lbs	33.2 lbs	49.8 lbs	49.8 lbs	66.4 lbs	



A-15.85" x B-25.35" x C-3.35"

JD-SB-300W		GROSS WEIGHT		27 lbs	BOX DIMENSION		23.62" x 18.5" x 6.3"
CONFIGURATION							
EPA	0.68 ft ²	1.36 ft ²	1.09 ft ²	1.77 ft ²	1.64 ft ²	2.18 ft ²	
NET WEIGHT	25.4 lbs	50.8 lbs	50.8 lbs	76.2 lbs	76.2 lbs	101.6 lbs	



A-14.57" x B-25.53" x C-3.16"

JD-SB-400W		GROSS WEIGHT		22 lbs	BOX DIMENSION		28.7" x 17.3" x 6.10"
CONFIGURATION							
EPA	1.21 ft ²	2.42 ft ²	2.15 ft ²	2.83 ft ²	2.70 ft ²	3.24 ft ²	
NET WEIGHT	21.4 lbs	42.8 lbs	42.8 lbs	64.2 lbs	64.2 lbs	85.6 lbs	



Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM





Information contained herein is subject to change without notice.
Revised 10/2023

JADEMAR JD-SB SERIES





AREA/SHOE BOX LUMINAIRE

ACCESSORIES DIMENSIONS

60W-200W MODEL

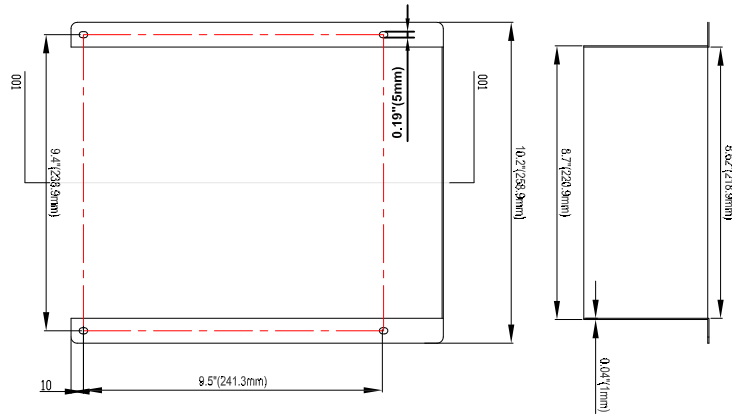
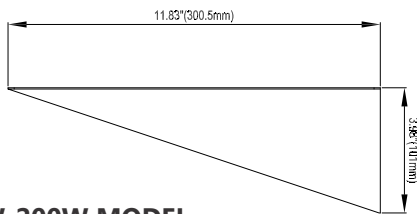


300W MODEL

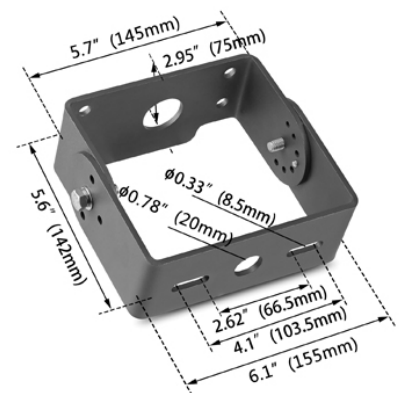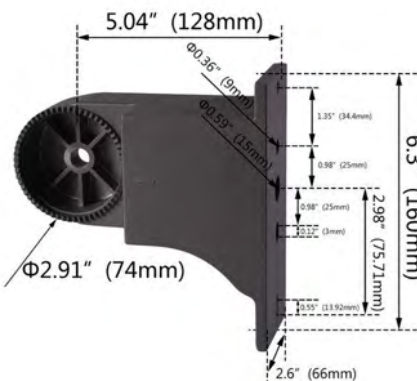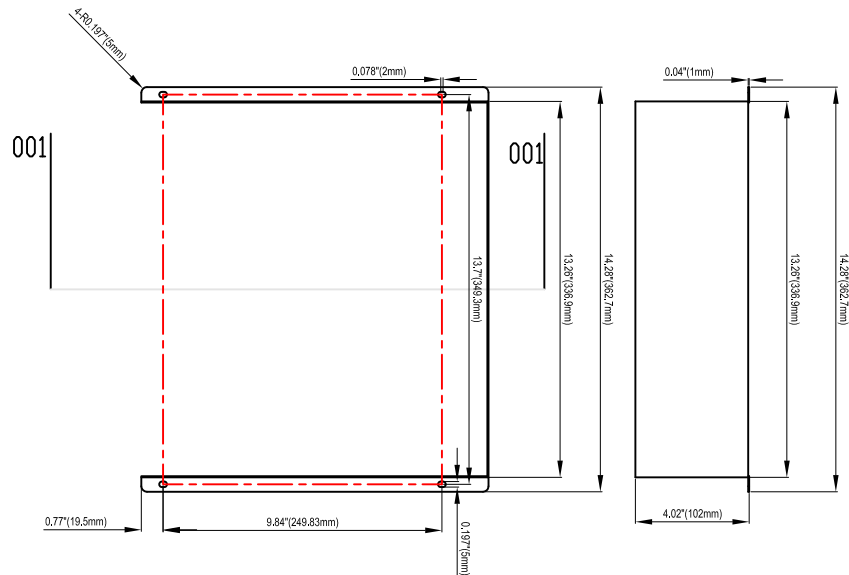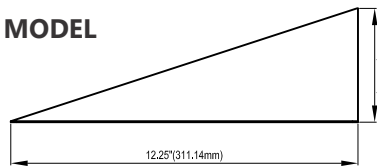


TYPE II

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHOTOMETRY






TYPE II

Type II optics produce a symmetrical pattern that evenly shines light on both sides of the lamp. In a back-to-back configuration, it creates a rectangular pattern.

TYPE III

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM






TYPE III

Type III optics produce an asymmetrical pattern that directs the majority of the light forward and Equally on both sides of the luminaire. In a back-to-back configuration, it creates a rectangular pattern.

TYPE IV

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM






TYPE IV

Type IV is suitable for applications where light is primarily required forward with minimal backlight. Typical installations include perimeter poles.

TYPE V


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



TYPE V

Type V optics produce an symmetrical pattern square distribution pattern that distributes light equally on all sides of the luminaire. Type V luminaires are universal for most area lighting applications.



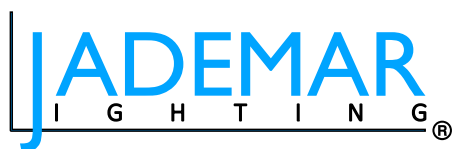

JD-SB SERIES

AREA/SHOE BOX LUMINAIRE



DLC PREMIUM QPL LISTING

Product ID	Model Number
S-CEX2KW	JD-SB-60W-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-F83JV4	JD-SB-60W-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-7YW09H	JD-SB-60W-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-YK4F9C	JD-SB-60W-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-QTKB3C	JD-SB-60W-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-PNY41J	JD-SB-60W-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-XFTE8	JD-SB-60W-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-GPFY8	JD-SB-60W-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-XZ5783	JD-SB-60W-H-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-ADUH40	JD-SB-60W-H-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-MJ2GUH	JD-SB-60W-H-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-K3WC4Y	JD-SB-60W-H-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-OMT17J	JD-SB-60W-H-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-FHCVQE	JD-SB-60W-H-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-1D6X7J	JD-SB-60W-H-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-SUYV75	JD-SB-60W-H-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-HLG50X	JD-SB-100W-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-5RVDFU	JD-SB-100W-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-S01OVY	JD-SB-100W-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-QJ7P9B	JD-SB-100W-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-76IPZF	JD-SB-100W-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-FJYB8L	JD-SB-100W-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-W8L3FG	JD-SB-100W-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-IYGJ0T	JD-SB-100W-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-Y7APHE	JD-SB-100W-H-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-JXNYCE	JD-SB-100W-H-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-BRHOQF	JD-SB-100W-H-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-12W6V5	JD-SB-100W-H-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-518JWG	JD-SB-100W-H-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-QE2PYB	JD-SB-100W-H-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-2MZ1XN	JD-SB-100W-H-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-VZC06Y	JD-SB-100W-H-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]

Product ID	Model Number
S-LMVF4P	JD-SB-150W-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-OXYQEN	JD-SB-150W-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-FJ65M2	JD-SB-150W-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-YET71V	JD-SB-150W-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-AJYH0V	JD-SB-150W-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-TJBN08	JD-SB-150W-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-9Z758C	JD-SB-150W-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-X8FVKB	JD-SB-150W-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-XMRTOQ	JD-SB-150W-H-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-KTE57P	JD-SB-150W-H-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-WEOLF5	JD-SB-150W-H-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-OE0HM8	JD-SB-150W-H-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-2MVHWJ	JD-SB-150W-H-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-VLJS6F	JD-SB-150W-H-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-ILNK8C	JD-SB-150W-H-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-2PF3N7	JD-SB-150W-H-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-4I2G0V	JD-SB-200W-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-R6CZXQ	JD-SB-200W-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-J625YI	JD-SB-200W-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-E6C4PI	JD-SB-200W-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-RWQ5VG	JD-SB-200W-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-06BXTK	JD-SB-200W-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-R83PGF	JD-SB-200W-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-8P12R3	JD-SB-200W-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-ZEGBUX	JD-SB-200W-H-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-POZBVQ	JD-SB-200W-H-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-CKZQ86	JD-SB-200W-H-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-HZ8J24	JD-SB-200W-H-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-AFUCLQ	JD-SB-200W-H-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-UVB1LO	JD-SB-200W-H-50K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-12DL7P	JD-SB-200W-H-50K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-6DM8RP	JD-SB-200W-H-50K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-TSEQ6B	JD-SB-300W-40K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-SHRQC8	JD-SB-300W-40K-T3-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-RX1A30	JD-SB-300W-40K-T4-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-LTZOPX	JD-SB-300W-40K-T5-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]
S-N9XVR7	JD-SB-300W-50K-T2-[BLANK,PC]-[BLANK,BMWO]-[SF,MA,TR]-[BZ,WH]

WWW.DESIGNLIGHTS.ORG



Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Revised 10/2023