AFTRO OLIMAN PLANNING OR OF THE PROPERTY OF TH

BOSTON REGION METROPOLITAN PLANNING ORGANIZATION

Gina Fiandaca, MassDOT Secretary and CEO and MPO Chair Tegin L. Teich, Executive Director, MPO Staff

TECHNICAL MEMORANDUM

DATE: April XX, 2023

TO: Valerie Oorthuys, Town of Stow

FROM: Casey Cooper, MPO Staff

RE: Stow Intersection Improvement Study

This memorandum summarizes the analyses and improvement strategies for the intersection of Route 117 and Route 62 in Stow, also known as the intersection of Great Road, Library Hill Road, and Gleasondale Road.

This memorandum contains the following sections:

- 1. Study Background
- 2. Existing Conditions
- 3. Issues and Concerns
- 4. Bicycle and Pedestrian Travel
- 5. Crash Data Analysis
- 6. Intersection Analysis
- 7. Improvement Recommendations
- 8. Conclusions and Next Steps

The memorandum also includes technical appendices that contain data and methods applied in the study.

1 STUDY BACKGROUND

The purpose of this study is to improve safety and operations at intersections within the Boston Metropolitan Planning Organization (MPO) region with a focus on cost- and time-effective strategies. The intent of the work is to identify simple solutions that can be used to enhance intersection conditions in the short term. These changes have the potential to serve as a first step before municipalities secure funding for larger scale projects to improve conditions at the intersection in the future.

In 2014, the Boston Region MPO participated in an intersection improvement program with the Massachusetts Department of Transportation (MassDOT) Highway Division to provide low-cost, small scale, and quickly implementable improvements, including signal retiming, signing, and pavement markings. The

Civil Rights, nondiscrimination, and accessibility information is on the last page.

program was funded in the Transportation Improvement Program with Congestion Mitigation and Air Quality Improvement Program dollars.

The primary goal of the program was to identify low-cost improvements that would help alleviate congestion at problem intersections. These types of small-scale improvements enjoy a high benefit-to-cost ratio. Through the 2014 iteration of the Intersection Improvement Program, MPO staff selected candidate intersections and contacted the relevant municipalities, using the Congestion Management Process. A consulting firm then visited 35 intersections around the region, implemented signal timing improvements, and proposed other low-cost improvement recommendations that municipalities could implement.

The Intersection Improvement Program was reintroduced through the Federal Fiscal Year 2021 Unified Planning Work Program with modifications to the original work. This project is on a smaller scale than the 2014 effort, conducted solely by MPO staff, and focused on providing recommendations that municipalities can implement themselves to improve the selected intersections.

This work gives the communities in which the intersections are located the opportunity to review the needs of the studied intersections, with a focus on changes that the municipalities themselves can implement quickly and within their current operating budgets to improve safety and operations. This project also highlights significant intersection needs before the municipality commits funds for design and engineering. Eventually, if the project qualifies for federal funds, this study's documentation will be useful to MassDOT. This study supports the MPO's visions and goals, which include increasing transportation safety, maintaining the transportation system, and advancing mobility.

This iteration of the Intersection Improvement Program began with the selection of municipality-owned intersections. MPO staff solicited recommendations from the community and compared the proposed locations based on crash averages, equity data, and consideration of which intersections' needs would be best addressed through this project. MPO staff consulted with municipal staff to validate the poor operations and safety issues at each intersection under consideration before finalizing the location selections. The following locations were selected for study:

- 1. Route 117 and Route 62 in Stow
- 2. Linden Street and Weston Road in Wellesley
- 3. Arlington Road and Pleasant Street in Woburn¹

Page 2 of 35

¹ MPO staff work for Woburn included additional consultation for Eaton Avenue and Main Street in Woburn.

This memorandum documents the MPO staff's analysis of the selected intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) in Stow. The recommendations for low-cost improvements outlined in this document can be used by Stow to develop a safety and traffic operation implementation plan for the location that the municipality would be responsible for funding.

2 EXISTING CONDITIONS

2.1 Regional Transportation Context

Stow is a town located west of Boston with a 2020 population of 7,174. It has a land area of 18.1 square miles, giving it an average population density of 396 people per square mile. The Metropolitan Area Planning Council characterizes Stow as a developing suburb.

Stow is located east of Interstate 495 (I-495) in Bolton and south of the limited-access section of Route 2 in Acton. The study intersection is where Route 62 meets and joins Route 117 and is considered the town center. This location is about 23 miles west of downtown Boston (Figure 1).

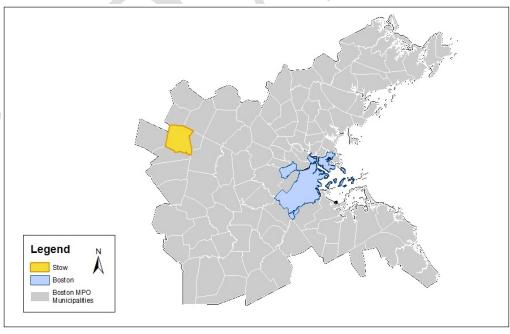


Figure 1
Stow within the Boston MPO Region

Route 117 runs through the study intersection in an east-west alignment. Five miles to the west it connects with I-495 at an interchange in the town of Bolton.

Two miles to the east Route 117 enters the town of Maynard and eventually reaches Waltham. In Stow Route 117 is called Great Road.

The southerly branch of the study intersection is Route 62, which is called Gleasondale Road in Stow. Five miles to the south it reaches the town center of the more densely populated community of Hudson. Route 62 leaves the study intersection via the easterly branch, which is designated as both Routes 62 and 117. In Maynard, Route 62 branches from Route 117 and continues north through Maynard center. Route 62 then connects with a signalized intersection of Route 2 in Concord.

The northerly branch of the intersection is Library Hill Road and is not a numbered route. Library Hill Road connects with Crescent Street, which then connects with West Acton Road. Turning to South Acton Road leads to Route 27 and the South Acton commuter rail station. A mile beyond the rail station is the limited-access section of Route 2 and Kelly's Corner, the regional commercial center.

2.2 The Study Intersection

The intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) is located within the civic center of Stow, with many buildings within walking distance, including the Town Building, Randall Library, two churches, and two schools. The intersection is the most heavily traveled in Stow, with more than 15,000 vehicles passing through the location daily.

The study intersection is a four-legged, signalized intersection. Route 117, or Great Road, travels east and west while Route 62, which shares the easterly branch with Route 117, turns south at the study intersection and is called Gleasondale Road in Stow. Library Hill Road is the northerly branch of the study intersection.

Three of the intersection approaches include two lanes, one for through travel and the other an exclusive turning lane. Route 117's westbound approach features a dedicated left-turn lane while its eastbound approach and Route 62's northbound approach include dedicated right-turn lanes. The intersection approach for Library Hill Road southbound only includes one lane. All four legs of the intersection are striped with one departure lane.

On the northeast corner of the intersection is Randall Library. Common Road, which crosses near the library to connect Great Road (Routes 117 and 62) to Library Hill Road, provides the only parking for the building, with patrons parking along the side of the street. Just east of Randall Library, where Common Road

meets Great Road (Routes 117 and 62), is the Children's Horizon's Preschool and the First Parish Church of Stow & Acton. Northwest of the library is Center School. Randall Library is a popular after-school destination because of the proximity of the church and schools.

The northwest corner of the intersection features One Main Street Studio florist shop; the southwest corner of the intersection is home to a gas station; and the southeast corner of the intersection is residential, with a low stone wall marking the edge of the property. The study intersection and its surrounding destinations are illustrated in Figure 2.



Figure 2
Intersection Study Area

3 ISSUES AND CONCERNS

Stow suggested the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) for this study in anticipation of the impact that several development projects will bring to the location, which is already the most heavily trafficked intersection in Stow. A mixed-income redevelopment effort between the Town and a private developer at The Butternut Farm Golf Club will introduce approximately 189 residential units, and the study intersection is expected to receive the bulk of traffic generated by the development.

There is also the potential for two developments to the west of the intersection. The first is a proposed boarding school for approximately 600 students at the former Bose facility, and the second is a mixed-income housing development on Hudson Road with approximately 141 units. In addition to these anticipated

demands, Stow's Complete Street Prioritization Plan includes multiple projects within a quarter mile of the intersection.

Despite the significance of the location in Stow, the Town is aware of several issues of concern. Pavement is failing in several areas of the intersection, which has led signal sensors to malfunction. The town believes that timing of the traffic signal needs to be adjusted and that the intersection's turning lanes could also use improvement. The current turning lane queues have not been updated in years and the Town of Stow explained that they affect sight lines from various approaches.

Stow indicated that Library Hill Road, the leg of the intersection with the least amount of traffic, receives fairly heavy usage in spite of having the lowest vehicle volumes. The key issue pointed out by the Town of Stow at the northern intersection leg is the lack of a dedicated left-turn lane and arrow for the movement.

Approximately 500 feet west of the study location is the skewed angle, three-way, stop-controlled intersection of Great Road and Crescent Street. The location introduces complexity to traffic operations of the study area when eastbound Great Road vehicles wait for a break in traffic to turn left onto Crescent Street. The narrow width of Great Road at the location makes it difficult for traffic behind the waiting vehicle to pass around the right of the turning driver and continue traveling eastbound, causing traffic to slow and vehicles to back up along Great Road.

Stow recently received an assessment at the intersection of Great Road and Crescent Street for the installation of a crosswalk and Rectangular Rapid Flashing Beacon (RRFB). The nearest crosswalk currently crosses Great Road about 60 feet east of Crescent Street, which makes pedestrians difficult to see from Crescent Street and introduces an unexpected pedestrian crossing location for drivers traveling along Great Road.

The assessment recommended moving the crosswalk 50 feet to the west so that it would be located on the corner of Crescent Street and proposed adding a solar-powered RRFB to the crossing. The benefits of the crosswalk relocation include increased space for ADA-compliant ramps, which are not included with the current crosswalk, and a more direct connection to the crosswalk that facilitates pedestrian travel across Crescent Street north of the Great Road intersection. This memorandum will not take into consideration the impact of these proposed improvements as they have not yet been implemented.

East of the Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) intersection is another skewed angle, three-way, stop-controlled intersection with Great Road. This instance features Common Road as the third leg, the street that crosses near Randall Library to connect Great Road (Routes 117 and 62) to Library Hill Road. Stow staff explained that vehicles often use Common Road as a cut-through route to avoid the light at the Great Road, Library Hill Road, and Gleasondale Road intersection, either to go north on Library Hill Road or to travel east along Great Road (Routes 117 and 62). This traffic competes with the Randall Library on-street parking on Common Road.

4 BICYCLE AND PEDESTRIAN TRAVEL

4.1 Bicycle and Pedestrian Overview

On November 18, 2021, the AM Peak hour at the Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) intersection was 7:00 AM to 8:00 AM and the PM Peak hour was 4:30 PM to 5:30 PM. The overall peak hour of data collection for all modes occurred during this PM Peak period. During both the AM and PM Peak periods, no pedestrians were counted. The AM Peak featured three bicyclists in the road and zero people bicycling in the intersection's crosswalks, while the PM Peak included two bicyclists in the road and again zero people bicycling on crosswalks.

The intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) includes pedestrian accommodations such as crosswalks, sidewalks, and curb ramps for some but not all four intersection legs. The location does not feature bicycle facilities. Although the intersection is signalized for motor-vehicle travel, there is an absence of pedestrian signals.

The northeast corner of the study intersection includes a sidewalk along Library Hill Road, but it does not continue along Great Road (Routes 117 and 62). There are two curb ramps on the northeast corner, both of which include a pedestrian detectable warning strip, but only Library Hill Road is painted with a crosswalk to direct pedestrians across the intersection and increase driver awareness of people walking.

Figure 3
View across Library Hill Road of Northeast Intersection Corner



Figure 4
View across Great Road (Routes 117 and 62) of
Northeast Intersection Corner



Figure 5
Pedestrian Facilities for Northeast Intersection Corner's
Library Hill Road Crossing



Figure 6
Great Road (Route 117 and 62) Crossing on Northeast Intersection Corner with Pedestrian Detectable Warning Strip Lacking Crosswalk



The northwest corner of the study intersection is the only corner that includes a sidewalk, a curb ramp, and both a crosswalk and a pedestrian detectable warning strip for both directions of travel, although the sidewalk does not extend up Library Hill Road and only travels west along Great Road (Route 117).

Figure 7
View across Library Hill Road of Northwest Intersection Corner



Figure 8
View across Great Road (Route 117) of Northwest Intersection Corner



Figure 9
Northwest Intersection Pedestrian Facilities



The intersection's southwest corner does not include sidewalks, curb ramps, or detectable warning strips, but it does feature a crosswalk for both intersection legs. Both crosswalks lead directly into landscaping surrounded by a low curb.

Figure 10
View of Southwest Intersection Corner



Figure 11
View across Great Road (Route 117) of Southwest Intersection Corner



Figure 12
View across Gleasondale Road (Route 62) of Southwest Corner



Figure 13

Lack of Pedestrian Facilities on Southwest Intersection Corner leading to

Gleasondale Road (Route 62) Crosswalk



Figure 14

Lack of Pedestrian Facilities on Southwest Intersection Corner leading to

Great Road (Route 117) Crosswalk



Finally, the southeast corner of the intersection features a narrow sidewalk with a steep curb that does not include curb ramps or pedestrian detectable warning strips. A crosswalk leads pedestrians across Gleasondale Road. There is no crosswalk to facilitate pedestrian travel across Great Road (Routes 117 and 62) to the northeast intersection corner.

Figure 15
View across Gleasondale Road (Route 62) of Southeast Intersection Corner



Figure 16
Southeast Intersection Corner Crosswalk Lacking Pedestrian Facilities



MPO staff graded the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) in Stow using the Boston Region MPO's Pedestrian Report Card Assessment (PRCA) and Bicycle Report Card tools to assess the safety and comfort of the location for people walking and bicycling. ^{2,3} The grading categories reflect the MPO's Long-Range Transportation Plan (LRTP) goals and assess the quality of four different aspects of the environment: Capacity Management and Mobility, Economic Vitality, Safety, and System Preservation. The report cards also prioritize locations based on Transportation Equity factors, incorporating another Boston region LRTP goal.

² Boston Region Metropolitan Planning Organization, "Pedestrian Level-of-Service" (Prepared by Ryan Hicks and Casey-Marie Claude, January 2017). https://www.ctps.org/ped-report-card. (Updated in 2019: Boston Region Metropolitan Planning Organization, "Pedestrian Report Card Assessment Interactive Database" [Prepared by Casey-Marie Claude, November 2019]. https://www.https://www.https://www.ctps.org/PRCA-interactive-database.)

³ Boston Region Metropolitan Planning Organization, "Development of a Scoring System for Bicycle Travel in the Boston Region" (Prepared by Casey-Marie Claude, November 2018). https://www.ctps.org/bicycle-level-of-service.

4.2 Pedestrian Report Card Assessment (PRCA)

Figure 17 Signalized Intersection PRCA for Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road)

Grading Categories: Scoring Breakdown Signalized Intersection

Capacity Management and Mobility						
Performance Measure	Percentage	Score (out of 3.0)	Rating			
Pedestrian Delay	43%	0	Not Present			
Sidewalk Presence	29%	1	Poor			
Curb Ramp Presence	14%	2	Fair			
Crosswalk Presence	14%	2	Fair			
Total (Pedestrian Delay Score * 0.43) + (Sidewalk Presence Score * 0.29) + (Cuts Ramp Presence Score * 0.14) + (Crosswalk Presence Score * 0.14)	100%	0.9	Poor			

Economic Vitality						
Performance Measure Percentage Score (out of 3.0) Rating						
Pedestrian Volumes	100%	1	Poor			

Meaning of Ratings Good 3.0 Fair: 2.0 Transportation Equity Priority High Four (4) or Five (5) Factors Moderate Two (2) or Three (3) Factors Low. Zero (0) or One (1) Factor

Safety						
Performance Measure	Percentage	Score (out of 3.0)	Rating			
Sufficient Crossing Time (Index)	38%	0	Not Present			
Pedestrian Crashes	38%	3	Good			
Pedestrian Signal Phase	13%	0	Not Present			
Vehicle Travel Speed	13%	2	Fair			
Total (Sufficient Crossing Time (Index) Score * 0.38) + (P edestrian Cranhers Score * 0.38) + (P edestrian Signal P reservce Score * 0.13) + (V ethicle Timed Speed Score * 0.13)	100%	1.4	Poor			

System Preservation						
Performance Measure Percentage Score (out of 3.0) Rating						
Sidewalk Condition	100%	1	Poor			

Transportation Equity Priority					
Area Condition	Yes/No				
Low Income Population =/> 32.32%	No				
Minority Population =/> 28.19%	No				
6.69%+ of Population > 75 Years of Age	Yes				
16.15%+ of Householdsw/o Vehicle	No				
Within ¼ Mile of School/College	Yes				

The intersection received a poor score for Capacity Management and Mobility on its PRCA, which was most negatively influenced by the lack of pedestrian signals at the intersection. The existence of curb ramps, pedestrian detectable warnings, and crosswalks at some locations helped the intersection's overall category grade, but the variability of their presence could only earn fair scores for those grading categories. Sidewalks, when present at the intersection, did not meet the minimum five-foot width requirement and lacked continuity, earning the intersection a poor score for sidewalk presence.

For Economic Vitality, the intersection received a poor score because no pedestrians were observed walking through the location during the AM and PM peak travel periods.

The intersection earned another poor score for the Safety category. The lack of pedestrian signals at the intersection made it impossible for the location to earn points for the Sufficient Crossing Time Index and Pedestrian Signal Phase

categories, which significantly affected the overall Safety score. Best practice recommends providing sufficient time for people walking to cross an intersection leg at a pace of 3.5 feet per second if they have left the curb at the end of the WALK phase.⁴ In areas known to have pedestrians who walk more slowly or areas with considerable numbers of people using mobility devices, slower speeds should be considered. By not providing pedestrian signals, the study intersection does not allow any time for pedestrians to cross.

The intersection received a fair score for vehicle travel speed in the Safety category because the posted speed limit at the location is 35 miles per hour, which is at the top of the fair range of 25 to 35 miles per hour for average vehicle travel speeds. Finally, there were no pedestrian crashes at the study intersection from 2015 through 2019, so the location earned the maximum number of points possible for the pedestrian crashes factor.

The Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) intersection received a poor score for System Preservation because the sidewalks at the location, when present, were narrow, lacked continuity, and were made up of variable quality pavement.

Overall, the intersection was considered a Moderate Priority area for pedestrian transportation equity. The proportion of the population older than 75 years of age at the study location exceeds the regional average and the intersection is located within one-quarter mile of a school.

Page 17 of 35

⁴ Manual on Uniform Traffic Control Devices (MUTCD). 2009. "Pedestrian Control Features: Pedestrian Intervals and Signal Phases." Accessed October 4, 2022. https://mutcd.fhwa.dot.gov/htm/2009/part4/part4e.htm.

4.3 **Bicycle Report Card**

Figure 18 Bicycle Report Card for Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road)

Grading Categories: Scoring Breakdown

Capacity Management and Mobility					
Performance Measure	Percentage	Points	Grade		
Bicycle Facility Presence	50%	0	F		
Proximity to Bike Network	33%	0	F		
Proximity to Transit	17%	0	F		
Total	0	F			

Economic Vitality						
Performance Measure Percentage Points Grade						
Bike Rack Presence	50%	0	F			
Land Use	50%	100	А			
Total	100%	50	F			

Grading
A: 90–100 Excellent

Satisfactory C: 70-79

Acceptable
Needs Improvement
Not recommended for bicycle travel **F**: 59–0

Transportation Equity Priority High: Four (4) or Five (5) Factors

Moderate Two (2) or Three (3) Factors

Low. Zero (0) or One (1) Factor

Safety						
Performance Measure	Percentage	Points	Grade			
BicycleFacility Presence	33%	0	F			
Absence of Bicy cle Crashes	33%	100	Α			
Bicy clistOperating Space	17%	0	F			
Number of Travel Lanes	17%	80	В			
Total	100%	46.6	F			

System Preservation						
Performance Measure Percentage Points Grade						
Bicycle Facility Continuity	50%	0	F			
Bicycle Facility Condition	50%	0	F			
Total	100%	0	F			

Transportation Equity Priority					
Area Condition	Yes/No				
Low Income Population =/> 32.32%	No				
Minority Population =/> 28.19%	No				
18.2%+ of Population < 16 Years Old	Yes				
16.15%+ of Householdsw/o Vehicle	No				
Within ¼ Mile of School/College	Yes				

The intersection received a failing score for the Capacity Management and Mobility category of the Bicycle Report Card. This is a result of the lack of bicycle facilities at the study location, the fact that the location is not within one-quarter mile of bicycle facilities, and the absence of a bus stop, transit station, or commuter rail station within one-half mile of the study location. Bicycle travel is difficult from the study location to other destinations throughout the Boston region.

The intersection received another failing score in the Economic Vitality category, in this case because the location does not include bike racks. This performance metric accounts for half of the overall category score, so the lack of safe places to secure bicycles negated the location's positive score for land use. The variety of destinations within the study area, such as Randall Library, Children's Horizon's Preschool, the First Parish Church of Stow & Acton, and the One Main Street Studio florist shop, indicate that there is reason for people to want to travel to the intersection.

The Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) intersection earned another failing score for the Safety category. The absence of bicycle facilities left the location with zero points for the associated performance metric. The intersection received 100 points for the Absence of Bicycle Crashes performance metric because there were no bicycle crashes at the study intersection from 2015 through 2019. Without bicycle facilities at the intersection, the location is not eligible to receive points for the Bicyclist Operating Space performance metric because people riding bicycles are required to share space with people driving, leaving them without dedicated operating space. Finally, the intersection received a score of 80 points for the Number of Travel Lanes performance metric. The three intersection legs between Great Road and Gleasondale Road each include two approach lanes and one departure lane, while Library Hill Road only includes one approach lane and one departure lane. Twenty points were deducted for the three legs with two approach lanes.

The study intersection also failed the System Preservation category. This, once again, is a result of the lack of bicycle facilities at the study location. It is impossible to award points for bicycle facility continuity or condition without the presence of bicycle accommodations.

Overall, the intersection was considered a Moderate Priority area for bicycle transportation equity. The proportion of the population younger than 16 years of age at the study location exceeds the regional average and the intersection is located within one-quarter mile of a school.

5 CRASH DATA ANALYSIS

5.1 An Expanded Crash Analysis Area

The focus of this study is the four-way intersection where east-west Route 117 joins with north-south Route 62, with these two routes sharing the easterly branch of this intersection. The northerly branch of the intersection is Library Hill Road, which connects with Crescent Street, which then connects with West Acton Road, providing access to the South Acton commuter rail station, Route 2, and the Kelly's Corner commercial area.

Vehicles travelling on Routes 117 or 62 that use this northerly corridor must travel on a leg of a triangle formed by three intersections, illustrated previously in Figure 2:

- The study intersection where Route 117 meets Route 62
- · Crescent Street at Route 117 (Great Road)
- Crescent Street at Hartley and Library Hill Roads

Data for 41 crashes on or near this triangle were collected. An additional 12 crashes occurring within a one-quarter mile of the triangle, mostly to the east or west on Route 117, have also been included in the crash analysis.

5.2 Crash Location Summaries

Table 1 summarizes 53 crashes in the crash analysis area for the years 2015–19. The first column characterizes crashes for the entire crash analysis area, and the next four columns subdivide the 53 crashes into four subareas. The first three subareas are for crash locations at or near one of the points of the triangle described above, and the last column summarizes the 12 crashes not associated with the central road triangle.

There were no fatalities at these locations during the five-year period. Crashes with an injury occurred once for every five or six property-damage-only crashes at each of the subareas. At the bottom of Table 1 it shows that there were no pedestrian or bicycle injuries in these subareas. This implies that all the injuries cited above were to drivers or vehicle passengers.

Other than the numbers of crashes, which depend on the amount of traffic, there are some distinctions between the crash experience in the different subareas. For instance, the angle-type crash is the most frequent crash type at three triangle vertex locations. For other study area locations along Route 117, single-vehicle and rear-end crashes are the most numerous. Also, crashes are more likely to take place in the PM-peak period than during the AM peak. The exception is at Route 117 and Crescent Street where twice as many crashes occurred during the AM peak. Appendix A provides information about all 53 crashes in the analysis area.

Table 1 2015–19 Crash Summary

	Study Area Total	Route 117 at Route 62	Route 117 at Crescent Street	Crescent Street at Hartley Road	Other Locations
Crash Severity					
Fatality	0	0	0	0	0
Injury	8	3	2	1	2
Property Damage Only	45	18	12	5	10
Total Crashes	53	21	14	6	12

Manner of Collision					
Single vehicle	12	5	2	1	4
Rear-end	14	5	4	1	4
Angle	18	7	4	4	3
Sideswipe, same direction	5	3	1	0	1
Sideswipe, opposite direction	1	1	0	0	0
Head-on	2	0	2	0	0
Not Reported/Unknown	1	0	1	0	0
Total Crashes	53	21	14	6	12
Road Surface Condition					
Dry	39	16	12	3	9
Wet	13	4	2	3	3
Ice	0	0	0	0	0
Snow	1	1	0	0	0
Total Crashes	53	21	14	6	12
Ambient Condition					
Daylight	43	19	13	2	9
Dark-lighted roadway	9	0	1	4	3
Dusk	0	0	0	0	0
Dawn	0	0	0	0	0
Dark-not-lighted roadway	1	2	0	0	0
Total Crashes	53	21	14	6	12
Weather Conditions					
Clear	32	14	11	2	7
Cloudy	12	3	2	1	4
Rain	8	3	1	3	1
Snow	1	1	0	0	0
Total Crashes	53	21	14	6	12
Time Period					
AM Peak (6:00 AM to 9:00 AM)	10	4	6	0	0
PM Peak (3:00 PM to 6:00 PM)	15	10	3	1	1
Off-peak	28	7	5	5	11
Total Crashes	53	21	14	6	12
Crash Vehicle-Mix					
Vehicle-only	53	21	14	6	12
Pedestrian	0	0	0	0	0
Bicycle	0	0	0	0	0
Total Crashes	53	21	14	6	12
Average Crashes per Year	10.6	4.2	2.8	1.2	2.4

Source: Central Transportation Planning Staff

5.3 Travel Direction and Improper Driving

Table 2 shows the total number of vehicles that were involved in the various crashes in each subarea. Each vehicle is characterized by the direction in which

it was traveling and whether its police report indicated any improper driving. The police reports only noted a specific type of improper driving (including inattention) for 37 of the 92 involved vehicles.

At the signalized intersection of Routes 117 and 62, there are 18 crash-involved vehicles traveling north or south, and 18 traveling east or west. The crash experience of vehicles traveling north is similar to those traveling south. However, vehicles traveling west are much more likely to crash than vehicles traveling east. Also, vehicles approaching this intersection from east or west are more likely to be cited in police reports for improper driving than vehicles approaching from the north or south.

None of the other intersections in the expanded crash analysis area have signalized traffic control. The intersection of Crescent Street and Hartley Road has four-way stop signs. Crescent Street has a stop sign at Route 117 (Great Road), the only stop sign at this T-type intersection. Curb ramps and commercial activity at this intersection may contribute to the fact that 15 eastbound vehicles were involved in a crash here, the greatest number of any of the locations and approach directions.

Table 2 2015–19 Crash Summary by Travel Direction and Driver Errors

	All Vehicles	Traveling West	Traveling East	Traveling North	Traveling South
Study Area Total					
53 Crashes, 92 Vehicles					
All drivers	92	36	29	11	16
Improper driving noted	37	15	11	5	6
No improper driving noted	55	21	18	6	10
SR 117 / SR 62 Junction					
21 Crashes, 36 Vehicles					
All drivers	36	13	5	8	10
Improper driving noted	15	7	3	2	3
No improper driving noted	21	6	2	6	7
SR 117 at Crescent Street					
14 Crashes, 26 Vehicles				·	
All drivers	26	9	15	1	1
Improper driving noted	7	2	4	1	0
No improper driving noted	19	7	11	0	1_
Crescent Street at Hartley Roa	ıd				
6 Crashes, 10 Vehicles					
All drivers	10	4	2	2	2
Improper driving noted	7	3	0	2	2
No improper driving noted	3	1	2	0	0
Other Study Area Locations					
12 Crashes, 20 Vehicles					
All drivers	20	10	7	0	3
Improper driving noted	8	3	4	0	1
No improper driving noted	12	7	3	0	2

Source: Central Transportation Planning Staff.

6 INTERSECTION ANALYSIS

6.1 Travel Patterns

MassDOT Highway Division's Traffic Data Collection section collected traffic data for the study. Automatic traffic recorder (ATR) counts were collected during a seven-day period from midday Tuesday, November 16, 2021, to midday Monday, November 22, 2021. The ATR counts included daily traffic volumes and traffic

mix (light and heavy vehicles). MassDOT also collected turning-movement counts (TMC) in the study area on Thursday, November 18, 2021, and Saturday, November 20, 2021. The TMC counts were performed during the weekday AM peak travel period (7:00 AM to 11:00 AM), weekday PM peak travel period (2:00 PM to 6:00 PM), and weekend midday period (10:00 AM to 2:00 PM). In all cases, passenger cars, heavy vehicles, pedestrians, and bicycles were recorded separately. The traffic data are included in Appendix B.

Turning movement counts for the weekday AM and PM peak travel periods are illustrated in Figure 19.⁵ The total average number of vehicles that passed through the Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) intersection on both weekdays and weekend days is documented in Figure 20.

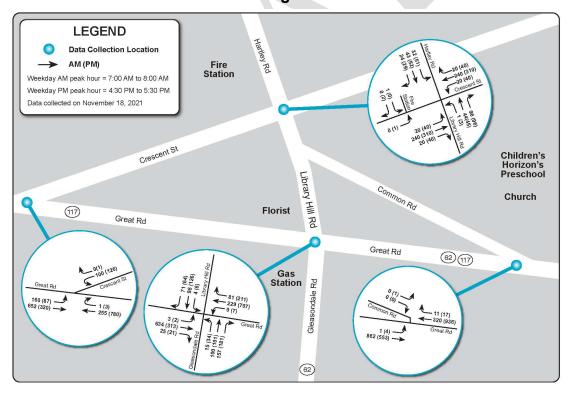


Figure 19
Peak Hour Turning Movement Volumes

⁵ The weekday AM peak hour was the same for the intersections of Route 117 at Route 62, Great Road (Route 117) at Crescent Street, and Great Road (Routes 117 and 62) at Common Road. The weekday PM peak hour of 4:30 PM to 5:30 PM was the same for the intersections of Route 117 and Route 62 and Great Road (Routes 117 and 62) and Common Road. The weekday PM peak hour for the Great Road (Route 117) and Crescent Street intersection was 4:45 PM to 5:45 PM. The weekday peak hours for the Crescent Street, Library Hill Road, and Hartley Road intersection were 7:30 AM to 8:30 AM and 2:45 PM to 3:45 PM.

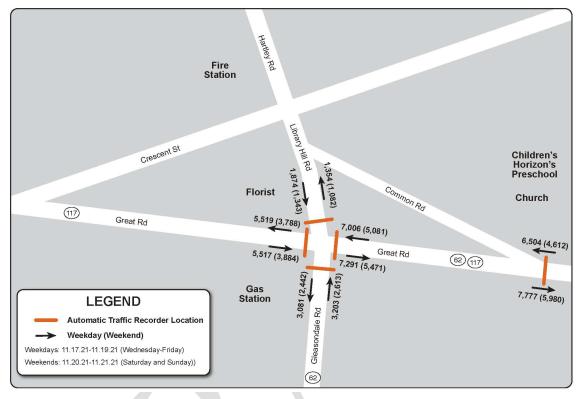


Figure 20
Average Weekday and Weekend Traffic Volumes

The intersection receives a greater amount of traffic during the AM peak than the PM peak travel period. The eastern branch of the intersection experiences the highest vehicle volumes during both peak periods, with the second-largest amount of traffic traveling along Great Road/Route 117 to the west of the intersection. The southern branch, Gleasondale Road/Route 62, is the third most traveled, and Library Hill Road, comprising the intersection's northern branch, receives the lowest volumes.

While approximately 500 vehicles traveled northwest along Common Road during both peak periods (502 during the AM peak period and 469 during the PM peak period), only one vehicle was recorded traveling southeast along the roadway. This motorist turned left onto Great Road/Route117/Route 62 to travel eastbound.

6.2 Intersection Levels of Service (LOS)

MPO staff conducted traffic operations analyses consistent with the Highway Capacity Manual (HCM) methodologies.⁶ HCM methodology is used to assess traffic conditions at signalized and unsignalized intersections and to rate the LOS from A to F. LOS A represents the best operating conditions (little to no delay), while LOS F represents the worst operating conditions (long delay). LOS E represents operating conditions at capacity (the limit of acceptable delay). Table 3 presents the control delays (standards for comparison) associated with each LOS for signalized and unsignalized intersections.

Table 3
Intersection Level of Service Criteria

Level of Service	Signalized Intersection Control Delay (seconds per vehicle)	Unsignalized Intersection Control Delay (seconds per vehicle)			
Α	< 10	< 10			
В	10–20	10–15			
С	20–35	15–25			
D	35–55	25–35			
E	55–80	35–50			
F	> 80	> 50			

Source: Highway Capacity Manual 2010.

Using Synchro traffic analysis software, MPO staff assessed the capacity and levels of service of the study area intersections. Appendix D presents the existing conditions LOS analysis worksheets. MPO staff observed a variable signal cycle and inconsistent signal durations for each leg of the Route 117/Route 62 intersection, indicating that the signals are actuated by the presence of vehicular traffic. The Town of Stow provided signal data that had been pulled from the traffic cabinet but there was limited signal information available. MPO staff did their best to approximate observed conditions at the study intersection and then used Synchro traffic analysis software to identify the optimal signal timing for the intersection given the AM and PM peak period volumes.

Based on the traffic operations analyses using approximated signal timing data, the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) has an AM peak period LOS of C and a PM peak period LOS of D. The surrounding unsignalized intersections experience the same LOS

Page 26 of 35

⁶ Transportation Research Board of the National Academies, *Highway Capacity Manual*, *Sixth Edition: A Guide for Multimodal Mobility Analysis*, Washington, DC, September 2020.

during both AM and PM peak periods. The Library Hill Road, Crescent Street, and Hartley Road intersection has a LOS of B while Great Road's intersections with Crescent Street and Common Road both experience LOS A.

7 IMPROVEMENT RECOMMENDATIONS

The Town of Stow expressed interest in adding a dedicated left-turn lane to the study intersection's southbound approach on Library Hill Road. MPO staff tested the impact of simply adding a left-turn lane but keeping the signal permissive, with both Library Hill Road and Gleasondale Road turning green simultaneously, and the impact of making the Library Hill Road left turn protected and permitted, giving the left turn an exclusive green phase within the signal cycle.

The Town of Stow also discussed the idea of turning Common Road into a one-way street. The idea Stow presented was to allow motorists to turn onto the street from Great Road (Routes 117 and 62) to travel northwest, with the one-way designation preventing vehicles from entering Common Road from Library Hill Road to travel in a southeast direction.

MPO staff modeled the impact of these changes on LOS at the study area intersections and found that modifications to the signalized intersection did not affect conditions at any of the unsignalized intersections. Traffic analyses using approximated signal timing data found that every scenario generated the same LOS: C for the AM Peak Travel period and D for the PM Peak Travel period.

Optimizing the signal timing did not change morning conditions but improved LOS during the PM Peak Travel period. While the service increased by one letter grade, from a D to C, when Library Hill Road was given a protected left-turn lane, the greatest LOS improvement occurred for the scenarios without the protected left turn, changing from a D to a B (Table 4).

Table 4

Route 117 at Route 62 Intersection LOS in a Variety of Scenarios

pproximated anal Timina	Optimized
, ,	Signal Timing
D	В
D	В
D	С
D	В
D	В
D	С
	D D D

LOS = Level of Service.

7.1 Short-Term Recommendations

MPO staff suggest that the Town of Stow optimize the intersection's signal timing. Table 5 compiles the maximum green phases generated by the Synchro modeling software for the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road). MPO staff also recommends that Stow does not introduce a protected left turn to the Library Hill Road approach. Adding a permissive left-turn lane to Library Hill Road and converting Common Road to a one-way street, however, are both changes that are not expected to negatively impact LOS at the study intersection, so the Town of Stow should feel comfortable introducing one element or both without concerns about intersection LOS.

Table 5
Optimized Signal Timing

Maximum Green Phase Duration

(Minimum Green Duration: 6 Seconds | Yellow Duration: 3 Seconds | Red Duration: 2 Seconds)


Scenario		Existing Conditions		Add Permissive Left Turn		Turn Common Road into One- Way Street		Add Permissive Left-Turn Lane and Turn Common Road into One-Way Street	
Peak Travel Period		AM	PM	AM	PM	AM	PM	AM	PM
Eastbound Approach Great Road (Route 117)	All Directions	25	14	27	17	25	15	27	17
Westbound Approach	Left-Turn Lane	6	10	6	11	6	11	6	11
Great Road (Route 117/ Route 62)	Straight and Right Turns	36	29	38	33	36	31	38	33
Northbound Approach Gleasondale Road	Straight and Left Turns	14	11	12	12	14	14	12	12
Route 62)	-Right- Turn Lane	25	26	23	28	25	30	23	28
Southbound Approach Library Hill Road	All Directions	14	11	12	12	14	14	12	12

Listed below are additional low-cost, quickly implementable changes that Stow could make to the study intersection to improve safety. These recommendations are illustrated in Figure 21.

- Restripe all travel lanes to 11-foot widths.
- Repaint all existing intersection crosswalks.
- Add a crosswalk to the eastern leg of the study intersection.
- Paint pedestrian zones that narrow curb radii at each intersection corner
 to slow turning vehicle speeds and increase pedestrian visibility. (Ideally,
 vertical separation in the form of large planters, flexible bollards, traffic
 cones, or moveable curbs would separate the pedestrian zones from
 vehicle traffic.)

One final short-term improvement for the intersection would be to stripe a fivefoot-wide bike lane for each direction of travel if roadway width allows after narrowing vehicle travel lanes and painting the pedestrian zones. Ideally the bike lanes would be accompanied by a painted buffer with a width of at least one foot and vertical separation to prevent motorists from entering the bike lanes. Bicycle volumes are currently low at the study intersection, but providing safe bicycle accommodations in the form of buffered bike lanes may encourage more people to travel through the intersection via bicycle.



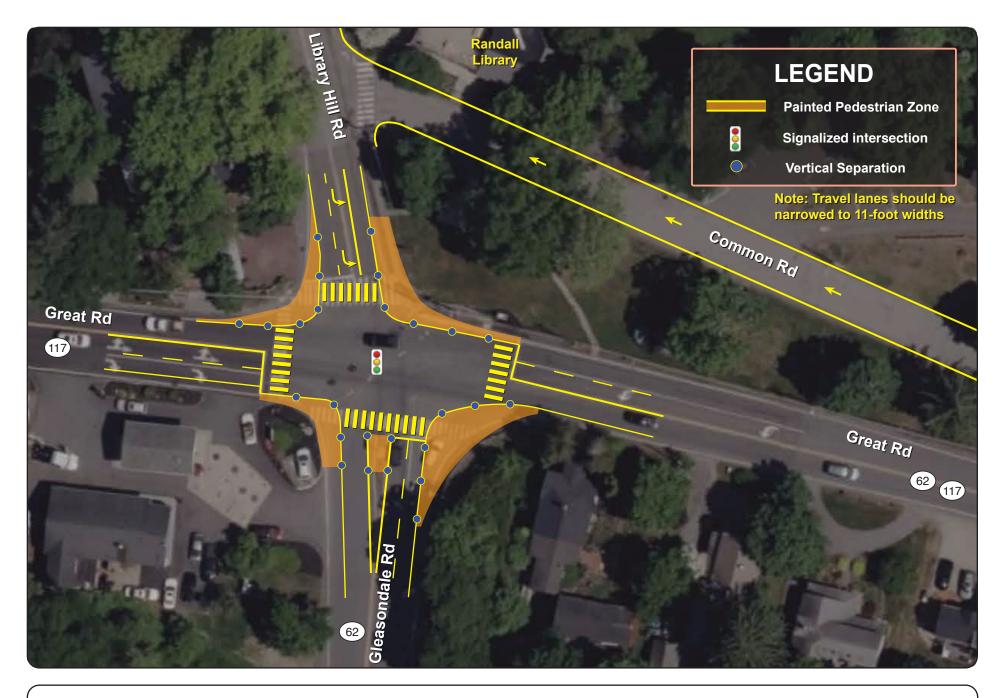

BOSTON REGION MPO



FIGURE 21
Proposed Short-Term Improvements
Routes 117 and 62, Stow MA

Intersection Improvement Program

7.2 Long-Term Recommendations

There are several investments in pedestrian travel that the Town of Stow could make to improve safety at the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road). These include the construction of proper sidewalks at least five feet in width along all intersection legs, adding curb ramps with pedestrian detectable warning strips where the sidewalk meets each intersection crosswalk, and installing audible, vibrotactile pedestrian signals with countdown timer displays. These improvements are reflected in Figure 22.



Figure 22
Recommended Future Investments

This last investment would require adding a pedestrian crossing phase to the existing traffic signals to allow people who are walking to safely cross the intersection. The intersection's longest current crossing is Gleasondale Road at the southern approach with a width of approximately 90 feet. It is recommended to allow pedestrians to travel at a pace of 3.5 feet per second, so the duration of the intersection's pedestrian phase should last at least 25.7 seconds. Table 6 documents the optimized signal timings and LOS for the study intersection if a 26 second pedestrian phase is added to the signal cycle. This duration could be shortened if the distance that pedestrians need to cross narrows.

Table 6
Optimized Signal Timing and LOS with Pedestrian Phase

Maximum Green Phase Duration and LOS

(Pedestrian Phase Duration: 26 Seconds | Yellow Duration: 2 Seconds | Red Duration: 1 Second) (Minimum Green Duration: 6 Seconds | Yellow Duration: 3 Seconds | Red Duration: 2 Seconds)

Scenario		Existing Conditions		Add Permissive Left Turn		Turn Common Road into One- Way Street		Add Permissive Left- Turn Lane and Turn Common Road into One-Way Street	
Peak Travel Period		AM	PM	AM	PM	AM	PM	AM	PM
Eastbound Approach Great Road (Route 117)	All Directions	42	21	28	22	42	21	28	22
Westbound Approach	Left-Turn Lane	8	8	6	11	8	8	6	11
Great Road (Route 117/Route 62)	Straight and Right Turns	55	34	39	38	55	34	39	38
Northbound Approach	Straight and Left Turns	26	17	12	13	26	17	12	13
Gleasondale Road (Route 62)	Right-Turn Lane	39	30	23	29	39	30	23	29
Southbound Approach Library Hill Road	All Directions	26	17	12	13	26	17	12	13
LOS		С	С	С	В	С	С	С	С

LOS = level of service.

8 CONCLUSIONS AND NEXT STEPS

8.1 Conclusions

There are several quick fixes that can be made at the intersection of Route 117 and Route 62 (Great Road, Library Hill Road, and Gleasondale Road) that have the potential to improve conditions for all road users. These rapidly implementable improvements can be accomplished using affordable materials, which should keep the overall cost of the short-term updates low. If Stow finds that these intersection modifications yield positive results, the Town could consider allocating funds to construct more permanent versions of the projects to create lasting safety and comfort benefits for all who travel through the intersection.

8.2 Next Steps

The Town of Stow could begin its intersection improvements by implementing the signal timing recommendations documented in this memorandum. This should be accompanied by the roadway paint and striping recommendations to provide more space for and better visibility of people walking and bicycling through the intersection. Stow would need to determine which type of temporary vertical separation feels most appropriate for the study location and the Town as a whole.

Looking ahead at implementing the long-term study recommendations, the travel volume by mode and turning movement count data provided through this work may be used by Stow to complete applications for regional, state, and federal funding to support infrastructure improvements. If Stow is interested in constructing bicycle facilities within the study area, the town may consider applying for Community Connections Program funding through the Boston Region MPO.

Appendices:

- Crash Data
- Traffic Data
- Existing Conditions LOS
- Proposed Conditions LOS

The Boston Region Metropolitan Planning Organization (MPO) operates its programs, services, and activities in compliance with federal nondiscrimination laws including Title VI of the Civil Rights Act of 1964 (Title VI), the Civil Rights Restoration Act of 1987, and related statutes and regulations. Title VI prohibits discrimination in federally assisted programs and requires that no person in the United States of America shall, on the grounds of race, color, or national origin (including limited English proficiency), be excluded from participation in, denied the benefits of, or be otherwise subjected to discrimination under any program or activity that receives federal assistance. Related federal nondiscrimination laws administered by the Federal Highway Administration, Federal Transit Administration, or both, prohibit discrimination on the basis of age, sex, and disability. The Boston Region MPO considers these protected populations in its Title VI Programs, consistent with federal interpretation and administration. In addition, the Boston Region MPO provides meaningful access to its programs, services, and activities to individuals with limited English proficiency, in compliance with U.S. Department of Transportation policy and guidance on federal Executive Order 13166.

The Boston Region MPO also complies with the Massachusetts Public Accommodation Law, M.G.L. c 272 sections 92a, 98, 98a, which prohibits making any distinction, discrimination, or restriction in admission to, or treatment in a place of public accommodation based on race, color, religious creed, national origin, sex, sexual orientation, disability, or ancestry. Likewise, the Boston Region MPO complies with the Governor's Executive Order 526, section 4, which requires that all programs, activities, and services provided, performed, licensed, chartered, funded, regulated, or contracted for by the state shall be conducted without unlawful discrimination based on race, color, age, gender, ethnicity, sexual orientation, gender identity or expression, religion, creed, ancestry, national origin, disability, veteran's status (including Vietnam-era veterans), or background.

A complaint form and additional information can be obtained by contacting the MPO or at http://www.bostonmpo.org/mpo non discrimination.

To request this information in a different language or in an accessible format, please contact

Title VI Specialist **Boston Region MPO** 10 Park Plaza, Suite 2150 Boston, MA 02116 civilrights@ctps.org

By Telephone:

857.702.3700 (voice)

For people with hearing or speaking difficulties, connect through the state MassRelay service:

Relay Using TTY or Hearing Carry-over: 800.439.2370

Relay Using Voice Carry-over: 866.887.6619

Relay Using Text to Speech: 866.645.9870

For more information, including numbers for Spanish speakers, visit https://www.mass.gov/massrelay

Appendix A Crash Data Summary Table

Crash Date	Crash Day	Crash Time of Day	Manner of Collision	Nonmotorist	Light Condition	Weather Condition	Road Surface	Driver Contributing Code	Injury Severity
02/04/2015	Wednesday	8:50 AM	Angle	No	Daylight	Cloudy	Wet	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
02/23/2015	Monday	3:59 PM	Unknown	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic)	No Injury
03/22/2015	Sunday	2:39 PM	Single vehicle crash	No	Daylight	Clear	Dry	V1:(Collision with embankment)	No Injury
04/01/2015	Wednesday	5:09 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Possible Non- Fatal Injury
05/03/2015	Sunday	3:39 AM	Single vehicle crash	No	Dark - lighted roadway	Clear	Dry	V1:(Collision with fence)	No Injury
05/03/2015	Sunday	3:55 AM	Single vehicle crash	No	Dark - lighted roadway	Clear	Dry	V1:(Collision with other fixed object(wall, building, tunnel, etc.)),(Collision with tree),(Collision with curb)	Possible Non- Fatal Injury
05/31/2015	Sunday	5:41 AM	Single vehicle crash	No	Daylight	Cloudy	Wet	V1:(Ran off road right),(Collision with tree)	Non- Incapacitating Non-Fatal Injury
06/11/2015	Thursday	5:22 PM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Non- Incapacitating Non-Fatal Injury
06/20/2015	Saturday	8:48 PM	Single vehicle crash	No	Dark - unknown roadway lighting	Rain/Cloudy	Wet	V1:(Collision with highway traffic sign post)	No Injury
06/30/2015	Tuesday	1:29 PM	Head-on	No	Daylight	Clear/Cloudy	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Possible Non- Fatal Injury
07/15/2015	Wednesday	4:57 PM	Sideswipe, same direction	No	Daylight	Clear/Other	Dry	V1:(Collision with parked motor vehicle) V2:(Collision with parked motor vehicle)	No Injury
08/03/2015	Monday	8:29 AM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
08/20/2015	Thursday	10:47 AM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic),(Cross median or centerline) V3:(Collision with motor vehicle in traffic)	No Injury

Crash Date	Crash Day	Crash Time of Day	Manner of Collision	Nonmotorist	Light Condition	Weather Condition	Road Surface	Driver Contributing Code	Injury Severity
10/11/2015	Sunday	9:28 AM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
10/24/2015	Saturday	10:30 AM	Sideswipe, same direction	No	Daylight	Cloudy/Other	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
10/26/2015	Monday	9:25 AM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
11/30/2015	Monday	6:29 AM	Single vehicle crash	No	Daylight	Clear	Dry	V1:(Collision with animal - deer)	No Injury
01/13/2016	Wednesday	9:09 AM	Angle	No	Daylight	Clear	Wet	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
01/20/2016	Wednesday	3:55 PM	Sideswipe, opposite direction	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic)	No Injury
04/04/2016	Monday	5:49 PM	Rear-end	No	Daylight	Snow	Slush	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
05/14/2016	Saturday	3:09 PM	Angle	No	Daylight	Cloudy	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
08/06/2016	Saturday	3:49 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with parked motor vehicle)	No Injury
08/10/2016	Wednesday	10:48 AM	Single vehicle crash	No	Daylight	Rain	Wet	V1:(Collision with curb),(Ran off road right),(Collision with utility pole)	No Injury
09/24/2016	Saturday	8:53 AM	Head-on	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Possible Non- Fatal Injury
10/05/2016	Wednesday	6:17 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
10/07/2016	Friday	10:47 AM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Possible Non- Fatal Injury
02/21/2017	Tuesday	8:00 AM	Sideswipe, same direction	No	Daylight	Cloudy/Other	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury

Crash Date	Crash Day	Crash Time of Day	Manner of Collision	Nonmotorist	Light Condition	Weather Condition	Road Surface	Driver Contributing Code	Injury Severity
03/05/2017	Sunday	2:05 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
05/27/2017	Saturday	7:45 AM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
08/02/2017	Wednesday	12:16 AM	Rear-end	No	Dark - lighted roadway	Clear	Dry	V1:(Collision with guardrail),(Collision with parked motor vehicle)	No Injury
09/14/2017	Thursday	2:56 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
09/16/2017	Saturday	10:34 AM	Angle	No	Daylight	Cloudy	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
09/23/2017	Saturday	10:44 AM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
10/12/2017	Thursday	7:51 AM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
11/10/2017	Friday	5:12 PM	Single vehicle crash	No	Dark - roadway not lighted	Clear	Dry	V1:(Collision with animal - other)	No Injury
12/12/2017	Tuesday	7:43 AM	Rear-end	No	Daylight	Cloudy/Rain	Wet	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
12/22/2017	Friday	11:16 AM	Angle	No	Daylight	Clear/Cloudy	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	Possible Non- Fatal Injury
3/1/2018	Thursday	3:38 PM	Sideswipe, same direction	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with parked motor vehicle)	No Injury
5/29/2018	Tuesday	6:06 PM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
6/24/2018	Sunday	5:56 PM	Single vehicle crash	No	Daylight	Rain	Wet	V1:(Collision with median barrier),(Collision with highway traffic sign post)	No Injury

Crash Date	Crash Day	Crash Time of Day	Manner of Collision	Nonmotorist	Light Condition	Weather Condition	Road Surface	Driver Contributing Code	Injury Severity
7/20/2018	Friday	5:13 PM	Sideswipe, same direction	No	Daylight	Clear/Other	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
8/2/2018	Thursday	3:32 PM	Rear-end	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
8/3/2018	Friday	1:57 PM	Rear-end	No	Daylight	Cloudy	Other	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
10/13/2018	Saturday	10:46 AM	Angle	No	Daylight	Cloudy/Rain	Wet	V1:(Collision with parked motor vehicle) V2:(Other)	No Injury
12/31/2018	Monday	8:02 PM	Angle	No	Dark - lighted roadway	Rain	Wet	V1:(Cross median or centerline),(Collision with motor vehicle in traffic)	No Injury
12/31/2018	Monday	8:02 PM	Angle	No	Dark - lighted roadway	Rain	Wet	V1:(Collision with motor vehicle in traffic) V2:(Cross median or centerline),(Collision with motor vehicle in traffic)	No Injury
02/01/2019	Friday	8:05 AM	Angle	No	Daylight	Clear	Dry	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
03/15/2019	Friday	9:17 PM	Angle	No	Dark - lighted roadway	Rain	Wet	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Injury
06/05/2019	Wednesday	2:50 PM	Single vehicle crash	No	Daylight	Clear	Dry	V1:(Ran off road left),(Collision with utility pole)	No Injury
08/02/2019	Friday	7:21 AM	Angle	No	Daylight	Clear		V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Apparent Injury
11/02/2019	Saturday	9:20 PM	Single vehicle crash	No	Dark - lighted roadway	Clear	Dry	V1:(Collision with utility pole)	No Apparent Injury
11/21/2019	Thursday	3:21 PM	Single vehicle crash	No	Daylight	Clear	Dry	V1:(Collision with median barrier),(Collision with highway traffic sign post)	No Apparent Injury
11/27/2019	Wednesday	5:53 AM	Angle	No	Dark - lighted roadway	Cloudy/Fog, Smog, Smoke	Wet	V1:(Collision with motor vehicle in traffic) V2:(Collision with motor vehicle in traffic)	No Apparent Injury

Appendix B Traffic and Signal Timing Data

- 1. Automatic Traffic Recorder (ATR) Data
- 2. Turning Movement Count (TMC) Data

Part 1: Automatic Traffic Recorder (ATR) Data



Starting: 11/16/2021

STA INB

File: D1116001.prn

City: Stow County:

Location: Library Hill Rd., Btwn. Great & Common Rds

Direction: NORTH

Station #: 00000000019

Site ID: 00000010102

TIME	MON 22	TUE 16	WED 17	THU 18	FRI 19	WKDAY AVG	SAT 20	SUN 21	WEEK AVG	TOTAL
01:00	1		1	4	4		2	6	3	18
02:00	1		1	1	1			1	1	6
03:00	1		1	1	1		1	1	1	6
04:00	2		0	1	1	1		0	1	5
05:00	3		4	1	1	2	1	0	2	10
06:00	11		16	14	16	14	1		10	60
07:00	59		63	59	58	60		5		267
08:00	138		128	121	127	128	-	33		601
09:00	109		135			124	63	62	103	620
10:00	83		84	96	95	90	85	61	84	504
11:00		70	73	83	80	76	73	110	82	489
12:00		54	80	67	70	68	83	77	72	431
13:00		100	86	89	93	92	126	111	101	605
14:00		93	57	81	90	80 -	127	126	96	5.74
15:00		94	107	90	101	98	95	91	96	578
16:00		124	142	130	123	130	86	103	118	708
17:00		124	134	141	105	126	104	78	114	686
18:00		109	106	108	77	100	66	57	87	523
19:00		68	50	69	62	62	43	34	54	326
20:00		30	35	44	29	34	28	33	3.3	199
21:00		11	24	14	27	19	20	33 25	20	121
22:00		21	21	18	22	20	14	14	18	110
23:00		12	14	11	9	12	11		12	70
24:00		2	2	2	9	4	8	4	4	27
TOTALS	408	912	1364	1380	1317	1344	1116	1047	1256	7544
% AVG WKDY	30.4	67.9	101.5	102.7	98.0		83.0	77.9		
% AVG WEEK		72.6	108.6	109.9	104.9		88.9	83.4		
AM Times	08:00	11:00	09:00	09:00	08:00	08:00	10:00	11:00	09:00	
			135			128	85		103	
PM Times		16:00	16:00	17:00	16:00	16:00	14:00	14:00	16:00	
PM Peaks		124	142	141	123	130	127	126	118	

44

NB 1344 SB 1856 com B AWP 3 200 FAL ,99 (,99) com B. ADT 3, 100

Page: 1

WEEKLY SUMMARY FOR LANE 2 Starting: 11/16/2021

Station #: 00000000019

Site ID: 000000010102
Location: Library Hill Rd., Btwn. Great & Common Rds
Direction: SOUTH

STA . ISB File: D1116001.prn

City: Stow County:

Page: 2

TIME	MON 22	TUE 16	WED 17	THU 18	FRI 19	WKDAY AVG		SUN 21	WEEK AVG	TOTAL
01:00	0		3	3	5	3	10	8	5	29
02:00	1		2	2	0 1 0	1	1	5	2	11
03:00	1		0	0	1	0			0	3
04:00	0		0	0	0	0	2	Ō	0	2
05:00	2		2	1	5	2	U		2	11
06:00	12		15		10	12	6	4	9	56
07:00	45		57	58	54	54	7	5	38	226
08:00	138		173	178	131	155		15	111 .	
09:00	140		163	145	169	154	86	56	126	759
10:00	102		118	110	116	112	94	90	105	630
11:00		93	86	97	93	92	121	110	100	600
12:00		108	79	130	108	106	142	107	112	674
13:00		93	119	124	135	118	124	152	124	747
14:00		112	104	104	102	106	132	112	111	666
15:00		135	135	116	148	134	148	130	135	812
16:00		215	175	194	208	198	134	179	184	1105
17:00		212	182	212	153	190	128	112	166	999
18:00		185	206	181	185	189	75	70	150	902
19:00		84	83	101	86	88	59	39	75	452
20:00		46	66	60	60	5.8	51	19	50	302
21:00		44	40	28	34	36	17	29 7	32 22	192
22:00		19	27	37	19	26	24	7	22	133
23:00		12	20		16		16	8	14	84
24:00			9	6		7	13	4	8	46
TOTALS	441		1864	1908	1849	1856			1681	10108
% AVG WKDY					99.6		76.7	68.0		
% AVG WEEK	26.2	81.0	110.9	113.5	110.0		84.7	75.1		
AM Times			08:00	08:00		08:00			09:00	
AM Peaks	140	108	173	178	169	155	142	110	126	
PM Times						16:00				
PM Peaks		215	206	212	208	. 198	148	179	184	

Starting: 11/16/2021

Station #: 000000000089 Site ID: 000000020304

Location: Great Rd., E. of Library Hill/Gleason. Rds Direction: EAST

STA. 2 EB

File: D1116002.prn

Page: 1

City: Stow County:

TIME	MON 22	TUE 16	WED 17	THU 18	FRI 19	WKDAY AVG		SUN 21	WEEK AVG	TOTAL
0.1 0.0			4.5	1.5	0.5	4.5	0.0	0.0		
01:00	6		17	15	21		20	20	16	99
02:00	5 1		9	5	6 5	6 2	13	12	8	50
03:00	1 5		1	3	5	2	10	6	4 7	26
			7			7	11	5	7	43
	28								24	
06:00	148		181	167	176			23		753
07:00	499		623	583	535	560	125	67		2432
08:00	801		873		769	827	226	112	608	3646
09:00	682		723	694	622	680	315	224		3260
	438		426		443	438	422	321		2493
11:00		410	393	401	413	404	471	392	413	2480
12:00		397	401	416	410	406	510	408		2542
13:00		397	395	462	440	424	522	444	443	2660
14:00		390∙	430	422	445	422	517		456	2733
15:00		455			496	471	512	468		2863
16:00	•	513			584	515	506			3086
17:00		502	516		496	520	465	408	492	2953
18:00		480	476	462	477	474	386			2628
19:00		269	282	318	346	304	300	221		1736
20:00		160	181	198	228	192	178	177		1122
21:00		129	125	129		135	134			781
22:00		91	96		109	98		85	99	592
23:00		47	96 57 31	79	60	61	. 87	34	61	364
24:00			·31	29	51	32	53	18	33 	200
TOTALS	2613								6613	39686
% AVG WKDY	36.4	59.2	100.3	102.0	102.0		83.2	69.0		
% AVG WEEK	39.5	64.4	109.0	110.9	110.8		90.5	75.0		
AM Times	08:00	11:00	08:00	08:00	08:00	08:00	12:00	12:00	08:00	
AM Peaks	-801	410	873	865	769	827	510	408	608	
PM Times		16:00	17:00	17:00	16:00	17:00	13:00	14:00	16:00	
PM Peaks								529	514	

43

EB 7188 WB 6942 COMB AWD 14 130 FAC 197 (198) comb ADT 13, 400

Starting: 11/16/2021

Station #: 000000000089

STAIZ WB

File: D1116002.prn

Page: 2

City: Stow County:

Site ID: 000000020304 Location: Great Rd., E. of Library Hill/Gleason. Rds

Direction: WEST

TIME	MON 22		WED 17	ТНU 18	FŘI 19	WKDAY AVG	SAT 20	SUN 21	WEEK AVG	TOTAL
				*						
01:00	12					14			16	
02:00	4		6	5	6	5	10	12	7	43
03:00	3		2	7	8	5	8	8	6 6 9 39	36
04:00	5		6	8	7	6	4	9	6	39
05:00	9 44 133		13	10	7	10	7	7	9	53
06:00	44		. 54	49	52	50	24	11	39	234
07:00	133									
08:00	318		320	322	297	314	144	99	250	1500
09:00	351		375	362	318	352	240		312	1870
	340			302	340	320	342		319	1912
11:00		331	287	365	363	336	442		365	2190
12:00		356	335	422	401	378	527	424	411	2465
13:00		405	430	445	469	437	517	454	453	2720
14:00		438	455	444	537	468	529	490	482	2893
15:00		513	523	566	596	550	498	436	522	3132
16:00		735	724	775	779	753	465	403	647	3881
17:00		832				846	411	348		4145
18:00		853		888	771	832	423			4040
19:00		507	460	483		492	290			2466
20:00		210	211	262	247	232	171	151	209	1252
21:00		175	158	174	164	168	140	135	158	946
22:00		96	116	110	125	168 112 70	126	87	110	660
23:00		53	59	66	102	70	90	42	69	412
24:00					52	40	71	21	42 	253
TOTALS									6324	
% AVG WKDY	17.6	79.8	96.2	102.8	103.8		80.1	66.3		
% AVG WEEK	19.3	87.6	105.6	112.8	114.0			72.7		
AM Times	09:00	12:00	09:00	12:00	12:00	12:00	12:00	12:00	12:00	
AM Peaks	35.1	356	375	422	401	378	527·	424	411	
PM Times		18:00	17:00	18:00		17:00				
				888	887	846	529	490	691	

Starting: 11/16/2021

Station #: 000000000043

Site ID: 000000030102

Location: Gleasondale St., S. of Great Rd.

Direction: NORTH

5TA . 3 NB

File: D1116003.prn

Page: 1

City: Stow

County:

TIME	MON	TUE	WED	THU	FRI	WKDAY	SAT	SUN	WEEK	TOTAL
	22	16	17	18	19	AVG	20	21	AVG	
01:00	1		3	9	9	6	5	9	6	36
02:00	3		3	3	5	4	5	3	4	22
03:00	1		2	1	1		2		2	10
04:00	2		1	2	4	2	3	1	2	13
05:00	8		4	6	5		9		6	33
06:00	31		42	34	39	36	16	6	28	168
07:00	136		147	162	156	150	60	20	114	681
08:00	293		299	285	281	2 9.0	83	66	218	1307
09:00	2,62		281	. 265	244	263	152	129	222	1333
10:00	191		174	200	187	188	217	129	183	1098
11:00		156	174	195	176	175	208	205	186	1114
12:00		144	182	171	182	170	238	204	187	1121
13:00		221	212	218	219	218	302	235	234	1407
14:00		191	192	202	218	201	282	268	226	1353
15:00		231	220	256	258	241	268	220	242	1453
16:00		250	291	277	319	284	256		272	1633
17:00		275	282	353	270	295	231	162	262	1573
18:00		235	218	242	199	224	186	166	208	1246
19:00		122	137	148	153	140	112	9.3	128	765
20:00		74	103	111	91	95	75	69	87	523
21:00		45	74	50	72	60	60		59	352
22:00			42	44	60	51	3,9		47	280
23:00		30	31	39	28	32		24	32	191
24:00		5	11	12	24	13	26			88
TOTALS	928					3145		2351	2970	17800
% AVG WKDY	29.5	64.8	99.4	104.5	101.7		91.4	74.8		
		68.6	105.2	110.6	107.7			79.2		
AM Times	08:00	11:00	08:00	08:00	08:00	08:00	12:00	11:00	09:00	
		156	299	285	281	290		205	222	
	2,0			200		2,0	200	200		
				17:00	16:00		13:00		16:00	
PM Peaks		275	291	353	319	295	302	268	272	

NB 3145 SB 3038 COMB AND 6 183 FAC .97 (.98) COMB APT 5,900

WEEKLY SUMMARY FOR LANE 2 Starting: 11/16/2021

5TA . 3 5B

File: D1116003.prn

City: Stow County:

Site ID: 00000030102 Location: Gleasondale St., S. of.Great Rd.

Direction: SOUTH

Station #: 000000000043

TIME		TUE				WKDAY			WEEK	TOTAL
	22 	16 	17	18		AVG			AVG	
01:00	4		3	10	8	6	11	8	7.	44
02:00	2		5	3	2	3	3	8	4	23
03:00	3		0	1	3	2	4	3	2	14
04:00	1		2	2	1	2	3	0	2	9
05:00	5		3	2	5	2 4 20	0	2	3	17
06:00	22		20	18	20	20	12	7	16	99
07:00	75		78	76	80	77	22	11	57	.342
08:00	156		178	203	155	173	63	34	132	789
09:00	156		185	189	164	174	139	111	157	944
10:00	158		169	157	163	162	164	172	164	983
11:00		161	160	177	158	164	243	189	181	1088
12:00		162	175	224	175	184	310	224	212	1270
13:00		179	202	228	235	211	240	230	219	1314
14:00		195	193	192	216	199	233	229	210	1258
15:00		230	233	210	258	233	274	234	240	1439
16:00		310	292	303	333	310	233	202	279	1673
17:00		334	300	348	324	326	209	170	281	1685
18:00		313	341	328	326	327	174	128	268	1610
19:00		179	155	176	183	173	174 117 75	86 51	149	896
20:00		89	105	114	124	108	75	51	93	558
21:00		78	76	72	77	76	54	46	67	403
22:00		56	55	76	48	59	51	25	52	311
23:00				28		28				161
24:00		15	14	19	19	17	23	10	17	100
TOTALS	582	2320	2977	3156	3,111	3038	2688	2196	2839	17030
AVG WKDY	19.2	76.4	98.0	103.9	102.4		88.5	72.3		
AVG WEEK	20.5	81.7	104.9	111.2	109.6		94.7	77.4		
AM Times	10:00	12:00	09:00	12:00	12:00	12:00	12:00	12:00	12:00	
	158	162	185	224	175	184	310	224	212	
PM Times		17:00	18:00	17:00	16:00	18:00	15:00	15:00	17:00	,
PM Peaks		334	341	348	333	327	274	234	281	

Page: 2

WEEKLY SUMMARY FOR LANE 1 Starting: 11/16/2021

S.TA . 4 EB

File: D1116004.prn

Page: 1

City: Stow County:

Location: Great Rd., W. of Library Hill/Gleason. Rds

Direction: EAST

Station #: 000000000075

Site ID: 000000040304

D1100010111										
TIME		TUE 16	17	THU 18	FRI 19	AVG	20	SUN 21	AVG	TOTAL
01:00	7		15	12	15	12	14	18	14	81
02:00	4		8	4	3	5	9	12	7 4 6 21 108	40
03:00	1		0	2	4	2	9	5	4	21
04:00	5		6	3	7	5	9	4	6	34
05:00	23 135		25	23	28	25	18	8	21	125
	135		159	146	150	148	40	19	108	649
07:00	428		273	コンフ	77/	7/2	フュ	JI	744	2002
	636				020	666		83.		
	513				426	505		149		2411
	310	309 294	324	338	338	328				1848
11:00		309	292	276	309	296		266		1790
12:00				301	283	296	374	270	304	1826
13:00		273	256		293	287	349	281		1779
14:00		263	289		300	290				1857
15:00		320	315		314		. 321			1905
16:00		329	314		349			320		1963
17:00		298	346	335	309		320	288		1896
18:00		308	320	310	321	315	260	225	291	1744
19:00		192	184	218	236	208	217		201	1205
20:00						135				804
21:00									90	
22:00		56	69	73	68	66	94	64	71	424
23:00		27	39	49	41	39	61	22	40	239
24:00		15	39 21	22	34	23	34	13	23	139
TOTALS	2062								4722	
% AVG WKDY	39.8	55.8	101.6	102.6	100.3		80.3	65.9		
% AVG WEEK	43.7		111.5		110.1		88.1	72.3		
AM Times	08:00	11:00	08:00 *	08:00	08:00	08:00	12:00	12:00	08:00	
AM. Peaks	636					666				
PM Times		16:00		17:00	16:00	16:00	13:00	14:00	16:00	
PM Peaks						326				

UB

EB 5185 WB 5468 COMP AWD 10 653 FAC . 97 (.98) COMB ADT 10,100

WEEKLY SUMMARY FOR LANE 2 Starting: 11/16/2021

STA.4WB

File: D1116004.prn

City: Stow County:

Location: Great Rd., W. of Library Hill/Gleason. Rds

Direction: WEST

Station #: 000000000075

Site ID: 000000040304

TIME	MON 22	TUE 16	WED	THU 18	FRI 19	WKDAY AVG	SAT 20	SUN 21	WEEK AVG	TOTAL
01:00	0		7	15	10	10	15	20	13	76
02:00	9		4						6	7 to 35
03:00	3		2	1	4	4	5	11	4	25
04:00	2 4 6		4	7	6	5	3	0	4 6 8	33
05:00	6		12	á	5	9	7	5	0	45
06:00	38		46	41	46	43	17	Q	33	196
07:00	102		132	129	109			21		542
08:00	259		270	265	242	259		77		1230
09:00	288		281	278	239	272	185	161	239	1432
10:00	254		228	223	260	241	262	202	238	1429
11:00	251	245	216	288	277	256	326	322	279	1674
12:00		268	232	299	321	280	378	310	301	1808
13:00		307	337		350	330	410	345	346	2077
14:00		332	351	352	397	358	390	348		2170
15:00		389	391	458		426	375	325	400	2403
16:00		593	578	627	624	606	365			3109
17:00		673	670	685	722	688	325	273	558	3348
18:00		705	648	738	611	676	320	217	540	3239
19:00		396	384	391	418	397	.230	157		1976
20:00		167	173	213	190	186	143			1009
21:00		130	123	132	127	128	103	106	120	721
22:00		70	85	88 51	94	84	103	73	86	513
23:00		46	85 44	51	86	84 57	.75	34	56	336
24:00		21	26	34	45	32	64	17		207
TOTALS	965		5244		•					
% AVG WKDY	17.6	79.4	95.9	103.5	103.4		78.2	63.9		
% AVG WEEK	19.5	87.9	106.2	114.6	114.5			70.7		
AM Times	09:00	12:00	09:00	12:00	12:00	12:00	12:00	11:00	12:00	
									301	
PM Times		18:00	17:00	18:00		17:00	13:00	14:00	17:00	
PM Peaks		705	670	738	722	688	410	348	558	

Page: 2

Starting: 11/16/2021

Station #: 00000000142 Site ID: 000000050304

Location: Great Rd., E.of Common Rd.

Direction: EAST

STA SEB

File: D1116005.prn

Page: 1

City: Stow

County:

TIME	MON	TUE	WED		FRI		SAT		WEEK	TOTAL
	22	16	17	18	19	AVG	20	21	AVG	
01:00	8		17	16	23	16	23	25	19	112
02:00	5		9	5	6	6	14	13	9	52
03:00	2		1 8	3	6	3			5	31
04:00	2 6		8	6	6 6 9	7	11,	6	5 8	46
05:00	28		26	24	28	26	27 '	10	24	143
06:00	148		177	167	173	166	61	23		749
07:00	502		624	585	545	564	127		408	2450
08:00	829		891	902	786	852	234		628	3768
09:00	705		744	710	636	699	347	243	564	3385
10:00	460		435	462		458	446	347	437	2624
11:00			406	445	437	429	507	435	446	2230
12:00		452	430	475	443	450	570	454	471	2824
13:00		451	417	529	494	473	590	506	498	2987
14:00		411	454	488	495	462	580	589	503	3017
15:00		490	504	538	538	518	555	509	522	3134
16:00		547	531	536	598	553	547	560		
17:00		520	538	619	519	549	498	440		3134
18:00					498	496		378		2769
19:00		299		375	375	343	316	263	325	1951
20:00		169		235	250	214		194	207	1243
21:00		143	139	157	171	152	146	122	146	878
22:00			104	116	115	107	124	95	108	648
23:00									69	
24:00		20	35	32	51	34	57	21	36	216
TOTALS	2693	4141	7559	8030	7741	7647	6485	5474	7095	42123
% AVG WKDY	35.2	54.2	98.8	105.0	101.2		84.8	71.6		
% AVG WEEK		58.4		113.2	109.1			77.2		
AM Times	08:00	12:00	08:00	08:00	08:00	08:00	12:00	12:00	08:00	
AM Peaks		452		902		852			628	
PM Times		16:00	17:00	17:00	16:00	16:00	13:00	14:00	16:00	
PM Peaks				619	598	553	590	589	553	

UB

EB 7647 WB 6459 COMB AWD 14 106 FAC ,97 (,98) COMB ADT 13,400

WEEKLY SUMMARY FOR LANE 2 Starting: 11/16/2021

Station #: 00000000142

Site ID: 00000050304

Location: Great Rd., E.of Common Rd.

Direction: WEST

STA. 5 WB

File: D1116005.prn City: Stow

Page: 2

County:

TIME	MON	TUE	WED		FRI					TOTAL
	22	16	17	18	19	AVG	20	21	AVG	
01:00	10		7	17	15	12	20	16	14	85
02:00	4		5	3				12	6	39
03:00	2			6	8	5	6	6	6 5	31
04:00	4		5	7	8	6	4	7	6 8 35 108	35
05:00	8		10	9	6	8	6	7	8	46
06:00	4.0		50	42	45	44	20	11	35	208
07:00	123		164	149	131	142	. 58	26	108	651
08:00	283		315	313	294	301	133	87	238	1425
09:00	323		351	343	296	328	207	211	288	1731
10:00	285		287	267	312	288	315	256	287	1722
11:00			268	309	329	302	410	374	338	1690
12:00		310	295	359	363	332	471	372	362	2170
13:00		352	384	352	394	370	448	411	390	2341
14:00		396	426	383	477	420	480	450	435	2612
15:00		482	496	498	571	512	452	397	483	2896
16:00		696	681	723	752	713	428	344	604	3624
17:00		834	802	795	877	827	395	322	671	4025
18:00		849	805	850	748	813	400	259	652	3911
19:00		491	431	441	500	466	270	173	384	2306.
20:00		196	192	228	227	211	163	135	190	1141
21:00		158	146	150	154 123	152	132	120	143	860
22:00		100	107	86	123	104	118	80 37	102	614
23:00		48	.55	56	93	63	82	37	62	371
24:00		32	27	39	48	36	65	17	38	228
TOTALS	1082	4944	6312	6425	6776	6459	5093	4130	5849	34762
% AVG WKDY	16.8	76.5	97.7	99.5	104.9		78.9	63.9		
	18.5		107.9	109.8	115.8	•	87.1	70.6		
	00.00	10.00	00.00	10.00	40.00	10.00	10.00	4.4 0.0	40.00	
AM Times						12:00				
AM Peaks	323	310	351	359	363	332	471	374	362	
PM Times		18:00	18:00	18:00	17:00	17:00	14:00	14:00	17:00	
PM Peaks						827			671	

Part 2: Turning Movement Count (TMC) Data



Thu Nov 18, 2021

Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill R	load				Great R	load (R	oute 62	/117	")		Gleaso	ndale R	oad (Ro	ute	62)		Great R	Road (R	oute 11	7)			
Direction	Southb	oound					Westbo	und					Northbo	ound					Eastbou	ınd					
Time	R	T	L	U	App	Ped*	R	T	L	U	App I	ed*	R	T	L	U	App	Ped*	R	Т	L	U	App	Ped*	Int
2021-11-18 7:00AM	4	98	71	0	173	0	0	229	81	0	310	0	157	100	15	0	272	0	25	634	3	0	662	0	1417
8:00AM	6	70	73	0	149	0	6	257	105	0	368	0	137	100	23	0	260	0	8	472	6	0	486	0	1263
9:00AM	5	60	27	0	92	0	1	211	83	0	295	0	105	81	11	0	197	0	13	297	5	0	315	0	899
10:00AM	10	66	17	0	93	0	2	258	93	0	353	0	116	62	11	0	189	0	17	255	2	0	274	0	909
2:00PM	6	66	30	0	102	3	6	428	123	0	557	0	171	74	17	0	262	2	12	273	7	0	292	0	1213
3:00PM	6	127	52	0	185	4	9	601	165	0	775	0	150	100	20	0	270	0	15	287	3	0	305	5	1535
4:00PM	7	128	65	0	200	0	3	656	200	0	859	0	209	124	18	0	351	1	21	315	1	0	337	0	1747
5:00PM	5	112	52	0	169	0	11	692	193	0	896	0	128	78	42	0	248	0	20	311	6	0	337	0	1650
2021-11-20 10:00AM	2	78	33	0	113	0	1	308	136	0	445	0	128	58	15	0	201	1	17	308	3	0	328	0	1087
11:00AM	4	91	43	0	138	0	3	349	173	0	525	0	137	66	22	0	225	0	45	330	1	0	376	0	1264
12:00PM	8	87	30	0	125	0	7	373	133	0	513	0	165	111	29	0	305	0	14	337	4	0	355	0	1298
1:00PM	3	89	39	0	131	2	16	373	138	0	527	0	171	105	11	0	287	0	7	319	3	0	329	3	1274
Total	66	1072	532	0	1670	9	65	4735	1623	0	6423	0	1774	1059	234	0	3067	4	214	4138	44	0	4396	8	15556
% Approach	4.0%	64.2%	31.9%	0%	-	-	1.0%	73.7%	25.3% ()%	-	-	57.8%	34.5%	7.6% ()%	-	-	4.9%	94.1%	1.0% ()%	-	-	-
% Total	0.4%	6.9%	3.4%	0% :	10.7%	-	0.4%	30.4%	10.4% ()% 4	41.3%	-	11.4%	6.8%	1.5% ()% 1	19.7%	-	1.4%	26.6%	0.3%)% 2	28.3%	-	-
Motorcycles	0	5	3	0	8	-	5	29	4	0	38	-	2	10	0	0	12	-	1	25	0	0	26	-	84
% Motorcycles	0%	0.5%	0.6%	0%	0.5%	-	7.7%	0.6%	0.2% ()%	0.6%	-	0.1%	0.9%	0% ()%	0.4%	-	0.5%	0.6%	0% ()%	0.6%	-	0.5%
Lights	66	1030	513	0	1609	-	55	4528	1591	0	6174	-	1717	1008	214	0	2939	-	200	3963	43	0	4206	-	14928
% Lights	100%	96.1%	96.4%	0% 9	96.3%	-	84.6%	95.6%	98.0% ()% 9	96.1%	-	96.8%	95.2%	91.5% ()% 9	95.8%	-	93.5%	95.8%	97.7% ()% 9	95.7%	-	96.0%
Single-Unit Trucks	0	21	11	0	32	-	4	137	21	0	162	-	41	21	13	0	75	-	8	98	0	0	106	-	375
% Single-Unit Trucks	0%	2.0%	2.1%	0%	1.9%	-	6.2%	2.9%	1.3% ()%	2.5%	-	2.3%	2.0%	5.6% ()%	2.4%	-	3.7%	2.4%	0% ()%	2.4%	-	2.4%
Articulated Trucks	0	3	0	0	3	-	1	27	3	0	31	-	4	2	2	0	8	-	0	40	1	0	41	-	83
% Articulated Trucks	0%	0.3%	0%	0%	0.2%	-	1.5%	0.6%	0.2% ()%	0.5%	-	0.2%	0.2%	0.9% ()%	0.3%	-	0%	1.0%	2.3%)%	0.9%	-	0.5%
Buses	0	2	5	0	7	-	0	9	4	0	13	-	9	3	5	0	17	-	4	10	0	0	14	-	51
% Buses	0%	0.2%	0.9%	0%	0.4%	-	0%	0.2%	0.2% ()%	0.2%	-	0.5%	0.3%	2.1% ()%	0.6%	-	1.9%	0.2%	0% ()%	0.3%	-	0.3%
Bicycles on Road	0	11	0	0	11	-	0	5	0	0	5	-	1	15	0	0	16	-	1	2	0	0	3	-	35
% Bicycles on Road	0%	1.0%	0%	0%	0.7%	-	0%	0.1%	0% ()%	0.1%	-	0.1%	1.4%	0% ()%	0.5%	-	0.5%	0%	0% ()%	0.1%	-	0.2%
Pedestrians	-	-	-	-	-	9	-	-	-	-	-	0	-	-	-	-	-	4	-	-	-	-	-	8	
% Pedestrians	-	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-	- 1	100%	-	-	-	-	-	100%	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	0%	-	-	-	-	-	-	-	-	-	-	-	0%	-	-	-	-	-	0%	_

 $^{^*}$ Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

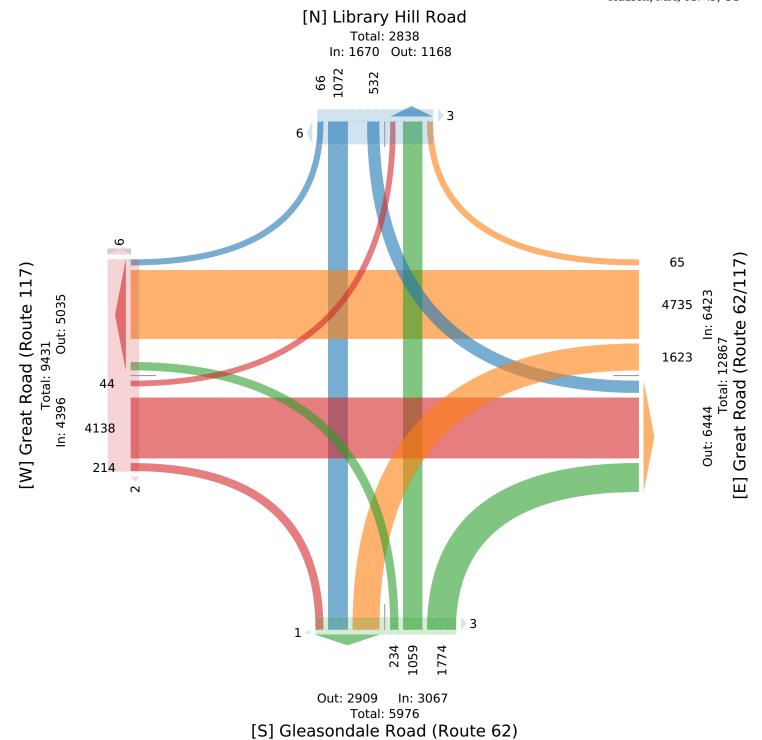

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill F	Road				Gre	at Road	(Route	62/	117)		Gleaso	ndale R	oad (Ro	ute	62)		Great R	load (R	oute 1	17)			
Direction	Southb	oound					Wes	stbound					Northb	ound					Eastbou	ınd					
Time	R	T	L	U	App I	ed*	R	Т	L	U	App I	ed*	R	Т	L	U	App I	Ped*	R	T	L	U	App P	ed*	Int
2021-11-18 7:00AM	1	19	14	0	34	0	0	63	28	0	91	0	41	16	3	0	60	0	9	149	1	0	159	0	344
7:15AM	0	15	14	0	29	0	0	53	20	0	73	0	35	25	5	0	65	0	7	164	0	0	171	0	338
7:30AM	0	49	23	0	72	0	0	69	12	0	81	0	33	31	6	0	70	0	7	163	1	0	171	0	394
7:45AM	3	15	20	0	38	0	0	44	21	0	65	0	48	28	1	0	77	0	2	158	1	0	161	0	341
Total	4	98	71	0	173	0	0	229	81	0	310	0	157	100	15	0	272	0	25	634	3	0	662	0	1417
% Approach	2.3%	56.6%	41.0%	0%	-	-	0%	73.9%	26.1% ()%	-	-	57.7%	36.8%	5.5% 0	%	-	-	3.8%	95.8%	0.5%	0%	-	-	-
% Total	0.3%	6.9%	5.0%	0% :	12.2%	-	0%	16.2%	5.7% ()% 2	21.9%	-	11.1%	7.1%	1.1% 0	% 1	9.2%	-	1.8%	44.7%	0.2%	0% 4	46.7%	-	-
PHF	0.333	0.500	0.772	-	0.601	-	-	0.826	0.723	-	0.849	-	0.813	0.825	0.625	-	0.877	-	0.694	0.966	0.750	-	0.968	-	0.902
Motorcycles	0	0	1	0	1	-	0	0	1	0	1	-	0	0	0	0	0	-	0	2	0	0	2	-	4
% Motorcycles	0%	0%	1.4%	0%	0.6%	-	0%	0%	1.2% ()%	0.3%	-	0%	0%	0% 0	%	0%	-	0%	0.3%	0%	0%	0.3%	-	0.3%
Lights	4	93	67	0	164	-	0	212	72	0	284	-	152	94	12	0	258	-	22	608	3	0	633	-	1339
% Lights	100%	94.9%	94.4%	0% 9	94.8%	-	0%	92.6%	88.9% ()% 9	91.6%	-	96.8%	94.0%	80.0% 0	% <u>9</u>	94.9%	-	88.0%	95.9%	100%	0% 9	95.6%	-	94.5%
Single-Unit Trucks	0	4	1	0	5	-	0	15	4	0	19	-	1	2	2	0	5	-	2	13	0	0	15	-	44
% Single-Unit Trucks	0%	4.1%	1.4%	0%	2.9%	-	0%	6.6%	4.9% ()%	6.1%	-	0.6%	2.0%	13.3% 0	%	1.8%	-	8.0%	2.1%	0%	0%	2.3%	-	3.1%
Articulated Trucks	0	0	0	0	0	-	0	1	1	0	2	-	1	2	1	0	4	-	0	10	0	0	10	-	16
% Articulated Trucks	0%	0%	0%	0%	0%	-	0%	0.4%	1.2% ()%	0.6%	-	0.6%	2.0%	6.7% 0	%	1.5%	-	0%	1.6%	0%	0%	1.5%	-	1.1%
Buses	0	1	2	0	3	-	0	0	3	0	3	-	2	1	0	0	3	-	1	1	0	0	2	-	11
% Buses	0%	1.0%	2.8%	0%	1.7%	-	0%	0%	3.7% ()%	1.0%	-	1.3%	1.0%	0% 0	%	1.1%	-	4.0%	0.2%	0%	0%	0.3%	-	0.8%
Bicycles on Road	0	0	0	0	0	-	0	1	0	0	1	-	1	1	0	0	2	-	0	0	0	0	0	-	3
% Bicycles on Road	0%	0%	0%	0%	0%	-	0%	0.4%	0% ()%	0.3%	-	0.6%	1.0%	0% 0	%	0.7%	-	0%	0%	0%	0%	0%	-	0.2%
Pedestrians	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn


Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

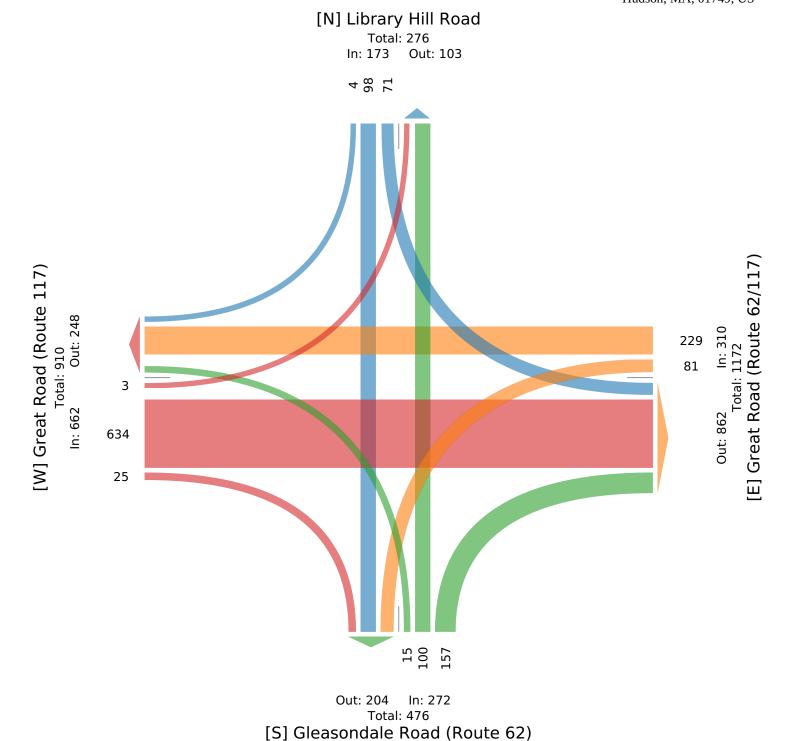

Thu Nov 18, 2021

PM Peak (Nov 18 2021 4:30PM - 5:30 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill F	Road				Great R	load (F	Route 62	/117	7)		Gleaso	ndale R	load (Ro	ute	62)		Great F	Road (R	oute 1	17)		\neg	
Direction	South	oound				,	Westbo	und					Northb	ound					Eastbou	und					
Time	R	T	L	U	App Ped	*	R	T	L	U	App 1	Ped*	R	T	L	U	App P	ed*	R	T	L	U	App P	ed*	Int
2021-11-18 4:30PM	1	35	13	0	49	0	1	168	50	0	219	0	51	34	3	0	88	0	6	77	0	0	83	0	439
4:45PM	4	37	18	0	59	0	0	169	58	0	227	0	65	30	8	0	103	0	7	75	0	0	82	0	471
5:00PM	2	24	16	0	42	0	5	190	51	0	246	0	27	19	12	0	58	0	1	82	1	0	84	0	430
5:15PM	1	30	17	0	48	0	1	180	52	0	233	0	38	18	11	0	67	0	7	79	1	0	87	0	435
Total	8	126	64	0	198	0	7	707	211	0	925	0	181	101	34	0	316	0	21	313	2	0	336	0	1775
% Approach	4.0%	63.6%	32.3%	0%	-	-	0.8%	76.4%	22.8%	0%	-	-	57.3%	32.0%	10.8% ()%	-	-	6.3%	93.2%	0.6%	0%	-	-	-
% Total	0.5%	7.1%	3.6%	0% 1	1.2%	-	0.4%	39.8%	11.9%	0%	52.1%	-	10.2%	5.7%	1.9% ()% 1	17.8%	-	1.2%	17.6%	0.1%	0%	18.9%	-	-
PHF	0.500	0.851	0.889	- (0.839	-	0.350	0.930	0.909	-	0.940	-	0.696	0.743	0.708	-	0.767	-	0.714	0.963	0.500	-	0.960	-	0.941
Motorcycles	0	0	0	0	0	-	0	2	0	0	2	-	0	1	0	0	1	-	0	2	0	0	2	-	5
% Motorcycles	0%	0%	0%	0%	0%	-	0%	0.3%	0%	0%	0.2%	-	0%	1.0%	0% 0)%	0.3%	-	0%	0.6%	0%	0%	0.6%	-	0.3%
Lights	8	125	64	0	197	-	6	685	210	0	901	-	178	97	32	0	307	-	19	306	2	0	327	-	1732
% Lights	100%	99.2%	100%	0% 9	9.5%	- 3	85.7%	96.9%	99.5%	0%	97.4%	-	98.3%	96.0%	94.1% ()% <u>s</u>	97.2%	-	90.5%	97.8%	100%	0%	97.3%	-	97.6%
Single-Unit Trucks	0	0	0	0	0	-	1	16	0	0	17	-	3	3	2	0	8	-	1	1	0	0	2	-	27
% Single-Unit Trucks	0%	0%	0%	0%	0%	-	14.3%	2.3%	0%	0%	1.8%	-	1.7%	3.0%	5.9% ()%	2.5%	-	4.8%	0.3%	0%	0%	0.6%	-	1.5%
Articulated Trucks	0	1	0	0	1	-	0	3	0	0	3	-	0	0	0	0	0	-	0	2	0	0	2	-	6
% Articulated Trucks	0%	0.8%	0%	0%	0.5%	-	0%	0.4%	0%	0%	0.3%	-	0%	0%	0% 0)%	0%	-	0%	0.6%	0%	0%	0.6%	-	0.3%
Buses	0	0	0	0	0	-	0	1	1	0	2	-	0	0	0	0	0	-	0	1	0	0	1	-	3
% Buses	0%	0%	0%	0%	0%	-	0%	0.1%	0.5%	0%	0.2%	-	0%	0%	0% 0)%	0%	-	0%	0.3%	0%	0%	0.3%	-	0.2%
Bicycles on Road	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	1	1	0	0	2	-	2
% Bicycles on Road	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	0%	0%	0% 0)%	0%	-	4.8%	0.3%	0%	0%	0.6%	-	0.1%
Pedestrians	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


PM Peak (Nov 18 2021 4:30PM - 5:30 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

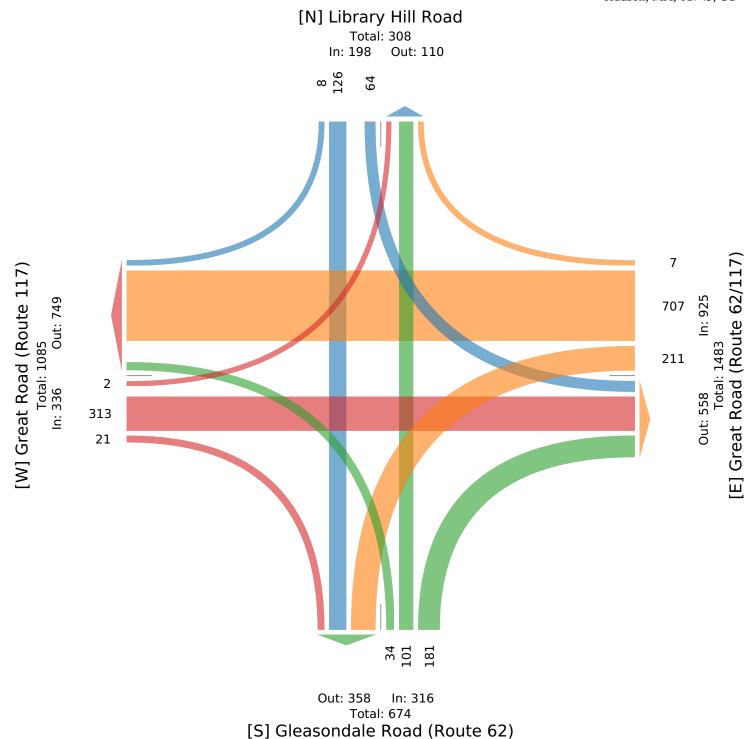

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill F	Road				Great	Road (1	Route 6	2/11	.7)		Gleaso	ndale R	load (R	oute	62)		Great 1	Road (R	oute :	117)		\neg	
Direction	South	oound					Westb	ound					Northb	ound					Eastbo	und					
Time	R	T	L	U	App 1	Ped*	R	T	L	U	Арр Р	ed*	R	T	L	U	App	Ped*	R	T	L	U	App P	ed*	Int
2021-11-20 10:00AM	0	18	9	0	27	0	1	83	29	0	113	0	39	20	1	0	60	1	3	68	2	0	73	0	273
10:15AM	1	16	10	0	27	0	0	81	34	0	115	0	24	16	5	0	45	0	5	67	0	0	72	0	259
10:30AM	1	22	6	0	29	0	0	80	37	0	117	0	34	15	2	0	51	0	2	86	0	0	88	0	285
10:45AM	0	22	8	0	30	0	0	64	36	0	100	0	31	7	7	0	45	0	7	87	1	0	95	0	270
Total	2	78	33	0	113	0	1	308	136	0	445	0	128	58	15	0	201	1	17	308	3	0	328	0	1087
% Approach	1.8%	69.0%	29.2%	0%	-	-	0.2%	69.2%	30.6%	0%	-	-	63.7%	28.9%	7.5% ()%	-	-	5.2%	93.9%	0.9%	0%	-	-	-
% Total	0.2%	7.2%	3.0%	0% 1	0.4%	-	0.1%	28.3%	12.5%	0%	40.9%	-	11.8%	5.3%	1.4% ()% 1	18.5%	-	1.6%	28.3%	0.3%	0% 3	30.2%	-	-
PHF	0.500	0.886	0.825	- (0.942	-	0.250	0.936	0.919	-	0.949	-	0.821	0.725	0.536	-	0.838	-	0.607	0.885 (0.375	-	0.863	-	0.953
Motorcycles	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0
% Motorcycles	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	0%	0%	0% ()%	0%	-	0%	0%	0%	0%	0%	-	0%
Lights	2	78	33	0	113	-	1	293	133	0	427	-	126	58	15	0	199	-	17	304	3	0	324	-	1063
% Lights	100%	100%	100%	0%	100%	-	100%	95.1%	97.8%	0%	96.0%	-	98.4%	100%	100% ()% 9	99.0%	-	100%	98.7%	100%	0% 9	98.8%	-	97.8%
Single-Unit Trucks	0	0	0	0	0	-	0	11	2	0	13	-	2	0	0	0	2	-	0	3	0	0	3	-	18
% Single-Unit Trucks	0%	0%	0%	0%	0%	-	0%	3.6%	1.5%	0%	2.9%	-	1.6%	0%	0% ()%	1.0%	-	0%	1.0%	0%	0%	0.9%	-	1.7%
Articulated Trucks	0	0	0	0	0	-	0	3	1	0	4	-	0	0	0	0	0	-	0	1	0	0	1	-	5
% Articulated Trucks	0%	0%	0%	0%	0%	-	0%	1.0%	0.7%	0%	0.9%	-	0%	0%	0% ()%	0%	-	0%	0.3%	0%	0%	0.3%	-	0.5%
Buses	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0
% Buses	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	0%	0%	0% ()%	0%	-	0%	0%	0%	0%	0%	-	0%
Bicycles on Road	0	0	0	0	0	-	0	1	0	0	1	-	0	0	0	0	0	-	0	0	0	0	0	-	1
% Bicycles on Road	0%	0%	0%	0%	0%	-	0%	0.3%	0%	0%	0.2%	-	0%	0%	0% ()%	0%	-	0%	0%	0%	0%	0%	-	0.1%
Pedestrians	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100%	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0%	-	-	-	-	-	-	_

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

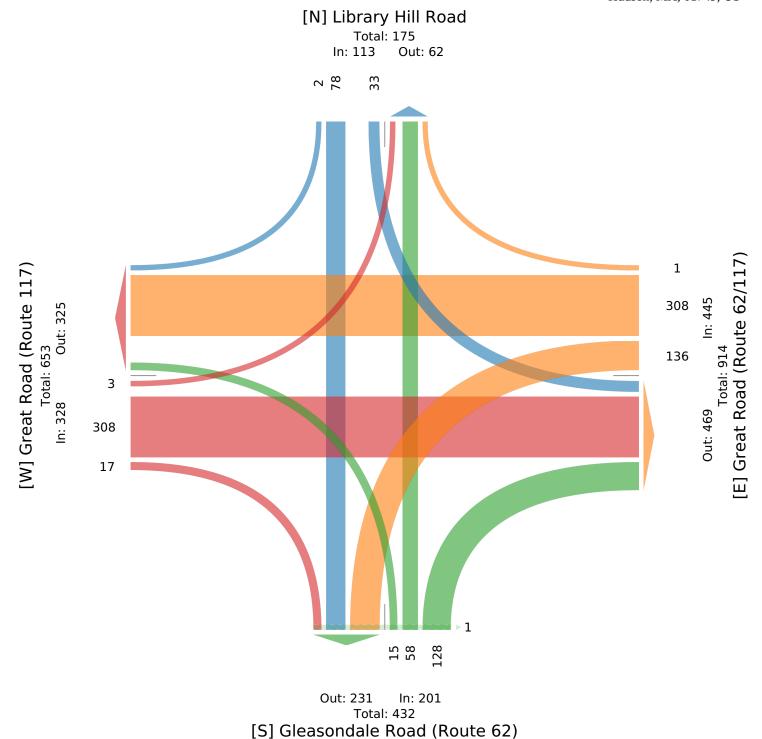

Sat Nov 20, 2021

Midday Peak (WKND) (Nov 20 2021 11:30AM - 12:30 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill F	Road				Great 1	Road (I	Route 6	2/11	7)		Gleaso	ndale R	load (Rou	ıte 6	52)		Great R	load (R	oute 1	17)			
Direction	South	oound					Westb	ound					Northb	ound					Eastbou	ınd					
Time	R	T	L	U	App Pe	d*	R	T	L	U	App 1	Ped*	R	T	L	U	App P	ed*	R	T	L	U	App P	ed*	Int
2021-11-20 11:30AM	2	25	16	0	43	0	0	86	38	0	124	0	38	12	6	0	56	0	5	71	0	0	76	0	299
11:45AM	0	21	11	0	32	0	0	90	47	0	137	0	34	15	4	0	53	0	28	81	0	0	109	0	331
12:00PM	4	38	8	0	50	0	1	97	28	0	126	0	38	20	3	0	61	0	3	83	2	0	88	0	325
12:15PM	0	14	4	0	18	0	2	108	38	0	148	0	39	43	18	0	100	0	4	77	2	0	83	0	349
Total	6	98	39	0	143	0	3	381	151	0	535	0	149	90	31	0	270	0	40	312	4	0	356	0	1304
% Approach	4.2%	68.5%	27.3%	0%	-	-	0.6%	71.2%	28.2%	0%	-	-	55.2%	33.3%	11.5% 0	%	-	-	11.2%	87.6%	1.1%	0%	-	-	-
% Total	0.5%	7.5%	3.0%	0% 1	1.0%	-	0.2%	29.2%	11.6%	0% -	41.0%	-	11.4%	6.9%	2.4% 0	% 2	0.7%	-	3.1%	23.9%	0.3%	0% 2	27.3%	-	-
PHF	0.375	0.750	0.609	- (0.785	-	0.375	0.882	0.803	-	0.904	-	0.955	0.539	0.431	- (0.689	-	0.357	0.940	0.500	-	0.817	-	0.936
Motorcycles	0	0	0	0	0	-	0	2	0	0	2	-	0	0	0	0	0	-	0	0	0	0	0	-	2
% Motorcycles	0%	0%	0%	0%	0%	-	0%	0.5%	0%	0%	0.4%	-	0%	0%	0% 0	%	0%	-	0%	0%	0%	0%	0%	-	0.2%
Lights	6	90	39	0	135	-	3	371	149	0	523	-	148	82	30	0	260	-	40	303	4	0	347	-	1265
% Lights	100%	91.8%	100%	0% 9	4.4%	-	100%	97.4%	98.7%	0% 9	97.8%	-	99.3%	91.1%	96.8% 0	% 9	6.3%	-	100%	97.1%	100%	0% 9	97.5%	-	97.0%
Single-Unit Trucks	0	0	0	0	0	-	0	7	2	0	9	-	1	0	1	0	2	-	0	7	0	0	7	-	18
% Single-Unit Trucks	0%	0%	0%	0%	0%	-	0%	1.8%	1.3%	0%	1.7%	-	0.7%	0%	3.2% 0	%	0.7%	-	0%	2.2%	0%	0%	2.0%	-	1.4%
Articulated Trucks	0	0	0	0	0	-	0	1	0	0	1	-	0	0	0	0	0	-	0	2	0	0	2	-	3
% Articulated Trucks	0%	0%	0%	0%	0%	-	0%	0.3%	0%	0%	0.2%	-	0%	0%	0% 0	%	0%	-	0%	0.6%	0%	0%	0.6%	-	0.2%
Buses	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0
% Buses	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	0%	0%	0% 0	%	0%	-	0%	0%	0%	0%	0%	-	0%
Bicycles on Road	0	8	0	0	8	-	0	0	0	0	0	-	0	8	0	0	8	-	0	0	0	0	0	-	16
% Bicycles on Road	0%	8.2%	0%	0%	5.6%	-	0%	0%	0%	0%	0%	-	0%	8.9%	0% 0	%	3.0%	-	0%	0%	0%	0%	0%	-	1.2%
Pedestrians	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


Midday Peak (WKND) (Nov 20 2021 11:30AM - 12:30 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

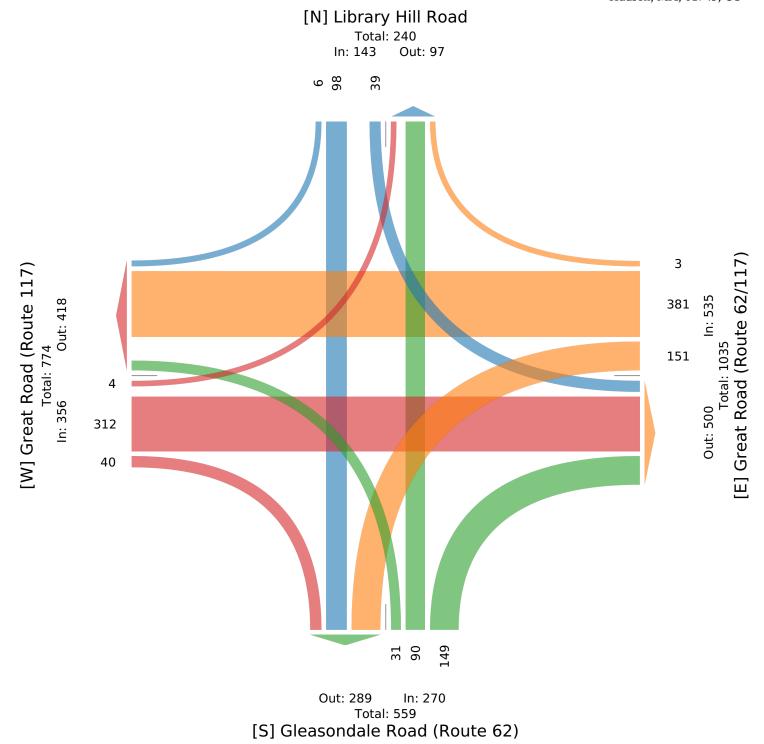

Sat Nov 20, 2021

PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

Leg	Librar	y Hill F	Road				Great R	load (R	oute 62	/117	7)		Gleaso	ndale R	load (R	oute	62)	Great F	Road (R	oute 11	17)			
Direction	Southb	oound					Westbo	und					Northb	ound				Eastbo	und					
Time	R	T	L	U	App	Ped*	R	T	L	U	App P	ed*	R	T	L	U	App Ped*	R	T	L	U	App	Ped*	Int
2021-11-20 1:00PM	0	21	16	0	37	1	4	88	29	0	121	0	47	34	0	0	81 (1	75	1	0	77	0	316
1:15PM	0	22	8	0	30	0	6	94	32	0	132	0	39	33	2	0	74 (3	66	1	0	70	0	306
1:30PM	2	22	6	0	30	1	4	96	41	0	141	0	38	19	6	0	63 () 2	86	1	0	89	3	323
1:45PM	1	24	9	0	34	0	2	95	36	0	133	0	47	19	3	0	69 (1	92	0	0	93	0	329
Total	3	89	39	0	131	2	16	373	138	0	527	0	171	105	11	0	287	7	319	3	0	329	3	1274
% Approach	2.3%	67.9%	29.8%	0%	-	-	3.0%	70.8%	26.2%)%	-	-	59.6%	36.6%	3.8% (0%	-	- 2.1%	97.0%	0.9% (0%	-	-	-
% Total	0.2%	7.0%	3.1%	0%	10.3%	-	1.3%	29.3%	10.8%)% (41.4%	-	13.4%	8.2%	0.9% ()% 2	22.5%	- 0.5%	25.0%	0.2% (0% 2	25.8%	-	-
PHF	0.375	0.927	0.609	-	0.885	-	0.667	0.971	0.841	-	0.934	-	0.910	0.765	0.458	-	0.919	- 0.583	0.867	0.750	-	0.884	-	0.965
Motorcycles	0	0	1	0	1	-	1	2	0	0	3	-	0	1	0	0	1	- 0	1	0	0	1	-	6
% Motorcycles	0%	0%	2.6%	0%	0.8%	-	6.3%	0.5%	0%)%	0.6%	-	0%	1.0%	0% (0%	0.3%	- 0%	0.3%	0% (0%	0.3%	-	0.5%
Lights	3	88	38	0	129	-	15	361	138	0	514	-	169	100	11	0	280	- 6	314	3	0	323	-	1246
% Lights	100%	98.9%	97.4%	0% :	98.5%	-	93.8%	96.8%	100%)% !	97.5%	-	98.8%	95.2%	100% ()% 9	97.6%	85.7%	98.4%	100% (0% 9	98.2%	-	97.8%
Single-Unit Trucks	0	1	0	0	1	-	0	9	0	0	9	-	2	0	0	0	2	- 1	3	0	0	4	-	16
% Single-Unit Trucks	0%	1.1%	0%	0%	0.8%	-	0%	2.4%	0%)%	1.7%	-	1.2%	0%	0% ()%	0.7%	- 14.3%	0.9%	0% (0%	1.2%	-	1.3%
Articulated Trucks	0	0	0	0	0	-	0	1	0	0	1	-	0	0	0	0	0	- 0	1	0	0	1	-	2
% Articulated Trucks	0%	0%	0%	0%	0%	-	0%	0.3%	0%)%	0.2%	-	0%	0%	0% (0%	0%	- 0%	0.3%	0% (0%	0.3%	-	0.2%
Buses	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	- 0	0	0	0	0	-	0
% Buses	0%	0%	0%	0%	0%	-	0%	0%	0%)%	0%	-	0%	0%	0% ()%	0%	- 0%	0%	0% (0%	0%	-	0%
Bicycles on Road	0	0	0	0	0	-	0	0	0	0	0	-	0	4	0	0	4	- 0	0	0	0	0	-	4
% Bicycles on Road	0%	0%	0%	0%	0%	-	0%	0%	0%)%	0%	-	0%	3.8%	0% ()%	1.4%	- 0%	0%	0% (0%	0%	-	0.3%
Pedestrians	-	-	-	-	-	2	-	-	-	-	-	0	-	-	-	-	- (-	-	-	-	-	3	
% Pedestrians	-	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-			-	-	-	- 1	.00%	-
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	- (-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	0%	-	-	-	-	-	-	-	-	-	-			-	-	-	-	0%	-

 $^{^*}$ Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902917, Location: 42.436534, -71.50495, Site Code: S21-041

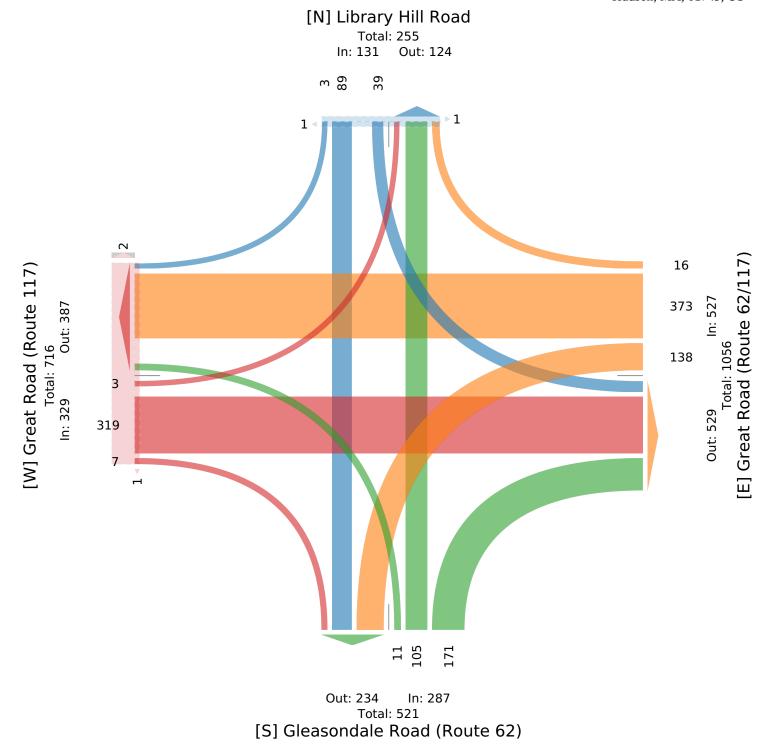

Thu Nov 18, 2021

Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

 $All\ Classes\ (Motorcycles,\ Lights,\ Single-Unit\ Trucks,\ Articulated\ Trucks,\ Buses,\ Pedestrians,$

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg		ley Roa						Crescen		et .						Hill Roa	ıd			
Direction	Sout	hbound	l					Westbo	und						Northbo	ound				
Time	HR	R	T	L	U	App	Ped*	R	BR	T	L	U	App	Ped*	R	T	BL	L	U	App Ped*
2021-11-18 7:00AM	0	27	38	20	0	85	2	42	0	72	133	0	247	1	84	31	0	1	0	116 0
8:00AM	0	24	26	17	0	67	7	19	1	81	119	0	220	5	100	28	0	1	0	129 0
9:00AM	0	2	1	3	0	6	2	3	1	67	91	0	162	2	88	1	0	2	0	91 0
10:00AM	0	0	1	1	0	2	1	4	0	74	91	0	169	1	68	2	0	1	0	71 0
2:00PM	0	33	14	11	0	58	12	17	0	91	86	0	194	10	77	28	0	4	0	109 0
3:00PM	0	52	56	30	0	138	13	10	2	121	132	0	265	29	104	22	0	2	0	128 0
4:00PM	0	14	11	4	0	29	9	6	0	129	183	0	318	15	135	12	0	7	1	155 0
5:00PM	0	11	2	3	0	16	0	3	1	103	166	0	273	0	101	5	0	5	1	112 0
2021-11-20 10:00AM	0	3	7	6	0	16	5	1	0	83	105	0	189	1	77	1	0	1	0	79 0
11:00AM	0	6	5	0	0	11	0	3	0	93	130	0	226	0	75	1	0	1	0	77 0
12:00PM	0	0	4	0	0	4	2	10	0	100	112	0	222	0	116	16	1	1	0	134 0
1:00PM	0	2	3	0	0	5	11	20	0	99	122	0	241	3	116	23	0	5	0	144 0
Total	0	174	168	95	0	437	64	138	5	1113	1470	0	2726	67	1141	170	1	31	2	1345 0
% Approach	0%	39.8%	38.4%	21.7%	0%	-	-	5.1%	0.2%	40.8%	53.9%	0%	-	-	84.8%	12.6%	0.1%	2.3%	0.1%	
% Total	0%	3.0%	2.9%	1.6%	0%	7.4%	-	2.3%	0.1%	18.9%	25.0%	0% -	46.3%	-	19.4%	2.9%	0%	0.5%	0%	22.9% -
Motorcycles	0	0	1	0	0	1	-	0	0	9	9	0	18	-	13	0	0	1	0	14 -
% Motorcycles	0%	0%	0.6%	0%	0%	0.2%	-	0%	0%	0.8%	0.6%	0%	0.7%	-	1.1%	0%	0%	3.2%	0%	1.0% -
Lights	0	165	163	90	0	418	-	126	5	1051	1406	0	2588	-	1076	163	1	28	2	1270 -
% Lights	0%	94.8%	97.0%	94.7%	0% !	95.7%	-	91.3%	100%	94.4%	95.6%	0%	94.9%	-	94.3%	95.9%	100%	90.3%	100%	94.4% -
Single-Unit Trucks	0	2	1	1	0	4	-	4	0	28	31	0	63	-	29	1	0	0	0	30 -
% Single-Unit Trucks	0%	1.1%	0.6%	1.1%	0%	0.9%	-	2.9%	0%	2.5%	2.1%	0%	2.3%	-	2.5%	0.6%	0%	0%	0%	2.2% -
Articulated Trucks	0	0	0	0	0	0	-	0	0	5	8	0	13	-	6	0	0	0	0	6 -
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0.4%	0.5%	0%	0.5%	-	0.5%	0%	0%	0%	0%	0.4% -
Buses	0	7	3	2	0	12	-	3	0	11	3	0	17	-	3	4	0	2	0	9 -
% Buses	0%	4.0%	1.8%	2.1%	0%	2.7%	-	2.2%	0%	1.0%	0.2%	0%	0.6%	-	0.3%	2.4%	0%	6.5%	0%	0.7% -
Bicycles on Road	0	0	0	2	0	2	-	5	0	9	13	0	27	-	14	2	0	0	0	16 -
% Bicycles on Road	0%	0%	0%	2.1%	0%	0.5%	-	3.6%	0%	0.8%	0.9%	0%	1.0%	-	1.2%	1.2%	0%	0%	0%	1.2% -
Pedestrians	-	-	-	-	-	-	60	-	-	-	-	-	-	63	-	-	-	-	-	- 0
% Pedestrians	-	-	-	-	-	- 1	93.8%	-	-	-	-	-	-	94.0%	-	-	-	-	-	
Bicycles on Crosswalk	-	-	-	-	-	-	4	-	-	-	-	-	-	4	-	-	-	-	-	- 0
% Bicycles on Crosswalk	-	-	-	-	-	-	6.3%	-	-	-	-	-	-	6.0%	-	-	-	-	-	

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021

Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Crescent St	treet						Fire Station							
Direction	Eastbound							Southeastb							
Time	R	T	L	HL	U	App	Ped*	HR	BR	BL	HL	U	App	Ped*	
2021-11-18 7:00AM	2	98	51	0	0	151	0	0	0	0	0	0	0	0	599
8:00AM	6	95	37	0	0	138	0	0	1	0	0	0	1	10	555
9:00AM	6	70	4	0	0	80	0	0	0	1	0	0	1	2	340
10:00AM	0	77	1	0	0	78	0	0	0	0	0	0	0	1	320
2:00PM	5	98	23	1	0	127	1	0	0	0	0	0	0	8	488
3:00PM	9	92	19	1	0	121	0	0	0	2	0	0	2	16	654
4:00PM	5	92	7	3	0	107	0	1	0	0	0	0	1	8	610
5:00PM	6	69	7	0	0	82	0	1	2	0	0	0	3	0	486
2021-11-20 10:00AM	1	71	1	0	0	73	0	0	0	0	0	0	0	5	357
11:00AM	3	63	2	0	0	68	1	0	0	0	0	0	0	1	382
12:00PM	5	170	13	0	0	188	0	0	1	0	0	0	1	2	549
1:00PM	3	147	5	0	0	155	0	0	0	0	0	0	0	6	545
Total	51	1142	170	5	0	1368	2	2	4	3	0	0	9	59	5885
% Approach	3.7%	83.5%	12.4%	0.4%	0%	-	-	22.2%	44.4%	33.3%	0%	0%	-	-	-
% Total	0.9%	19.4%	2.9%	0.1%	0%	23.2%	-	0%	0.1%	0.1%	0%	0%	0.2%	-	-
Motorcycles	0	14	1	0	0	15	-	0	0	0	0	0	0	-	48
% Motorcycles	0%	1.2%	0.6%	0%	0%	1.1%	-	0%	0%	0%	0%	0%	0%	-	0.8%
Lights	48	1081	166	4	0	1299	-	2	3	1	0	0	6	-	5581
% Lights	94.1%	94.7%	97.6%	80.0%	0%	95.0%	-	100%	75.0%	33.3%	0%	0%	66.7%	-	94.8%
Single-Unit Trucks	0	33	0	0	0	33	-	0	1	1	0	0	2	-	132
% Single-Unit Trucks	0%	2.9%	0%	0%	0%	2.4%	-	0%	25.0%	33.3%	0%	0%	22.2%	-	2.2%
Articulated Trucks	0	6	0	1	0	7	-	0	0	1	0	0	1	-	27
% Articulated Trucks	0%	0.5%	0%	20.0%	0%	0.5%	-	0%	0%	33.3%	0%	0%	11.1%	-	0.5%
Buses	1	7	3	0	0	11	-	0	0	0	0	0	0	-	49
% Buses	2.0%	0.6%	1.8%	0%	0%	0.8%	-	0%	0%	0%	0%	0%	0%	-	0.8%
Bicycles on Road	2	1	0	0	0	3	-	0	0	0	0	0	0	-	48
% Bicycles on Road	3.9%	0.1%	0%	0%	0%	0.2%		0%	0%	0%	0%	0%	0%	-	0.8%
Pedestrians	-	-	-	-	-	-	2	-	-	-	-	-	-	58	
% Pedestrians	-	-	-	-	-	-	100%	-	-	-	-	-	-	98.3%	-
Bicycles on Crosswalk	-	-	-	-	-	-	0	-	-	-	-	-	-	1	
% Bicycles on Crosswalk	-	-	-	-	-	-	0%	-	-	-	-	-	-	1.7%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

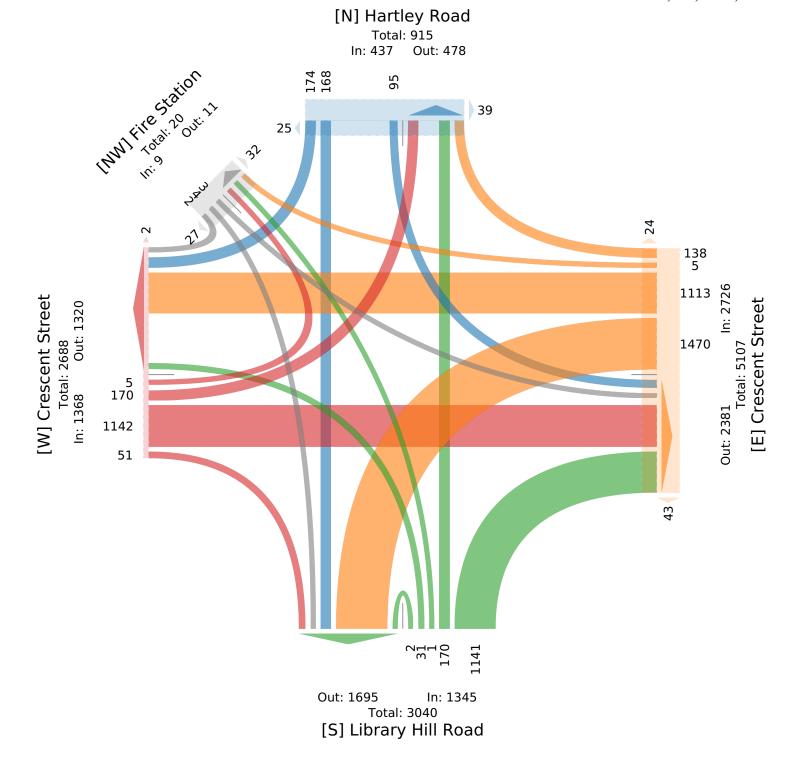

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7:30AM - 8:30 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Hartl	ey Road	i					Crescent	Stre	eet					Library	Hill Roa	ıd				
Direction	Sout	hbound						Westbou	ınd						Northbo	und					
Time	HR	R	T	L	U	App	Ped*	R	BR	T	L	U	Арр	Ped*	R	T	BL	L	U	Арр	Ped*
2021-11-18 7:30AM	0	22	28	16	0	66	1	23	0	17	42	0	82	0	19	17	0	1	0	37	0
7:45AM	0	1	5	3	0	9	1	1	0	15	33	0	49	1	28	4	0	0	0	32	0
8:00AM	0	1	1	0	0	2	0	4	0	22	36	0	62	0	29	3	0	0	0	32	0
8:15AM	0	8	9	5	0	22	3	10	0	20	31	0	61	3	20	20	0	0	0	40	0
Total	0	32	43	24	0	99	5	38	0	74	142	0	254	4	96	44	0	1	0	141	0
% Approach	0%	32.3%	43.4%	24.2%	0%	-	-	15.0%	0%	29.1%	55.9%	0%	-	-	68.1%	31.2%	0%	0.7%	0%	-	-
% Total	0%	5.0%	6.7%	3.7%	0%	15.3%	-	5.9%	0%	11.5%	22.0%	0%	39.3%	-	14.9%	6.8%	0%	0.2%	0%	21.8%	-
PHF	-	0.364	0.384	0.375	-	0.375	-	0.413	-	0.841	0.839	-	0.771	-	0.819	0.550	-	0.250	-	0.875	-
Motorcycles	0	0	0	0	0	0	-	0	0	0	1	0	1	-	0	0	0	0	0	0	-
% Motorcycles	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0.7%	0%	0.4%	-	0%	0%	0%	0%	0%	0%	-
Lights	0	29	40	23	0	92	-	37	0	68	135	0	240	-	90	41	0	1	0	132	-
% Lights	0%	90.6%	93.0%	95.8%	0%	92.9%	-	97.4%	0%	91.9%	95.1%	0%	94.5%	-	93.8%	93.2%	0%	100%	0%	93.6%	-
Single-Unit Trucks	0	0	1	0	0	1	-	0	0	2	4	0	6	-	4	1	0	0	0	5	-
% Single-Unit Trucks	0%	0%	2.3%	0%	0%	1.0%	-	0%	0%	2.7%	2.8%	0%	2.4%	-	4.2%	2.3%	0%	0%	0%	3.5%	-
Articulated Trucks	0	0	0	0	0	0	-	0	0	0	0	0	0	-	1	0	0	0	0	1	-
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	1.0%	0%	0%	0%	0%	0.7%	-
Buses	0	3	2	1	0	6	-	1	0	4	1	0	6	-	0	2	0	0	0	2	-
% Buses	0%	9.4%	4.7%	4.2%	0%	6.1%	-	2.6%	0%	5.4%	0.7%	0%	2.4%	-	0%	4.5%	0%	0%	0%	1.4%	-
Bicycles on Road	0	0	0	0	0	0	-	0	0	0	1	0	1	-	1	0	0	0	0	1	-
% Bicycles on Road	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0.7%	0%	0.4%	-	1.0%	0%	0%	0%	0%	0.7%	-
Pedestrians	-	-	-	-	-	-	5	-	-	-	-	-	-	4	-	-	-	-	-	-	0
% Pedestrians	-	-	-	-	-	-	100%	-	-	-	-	-	-	100%	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	-	0	-	-	-	-	-	-	0	-	-	-	-	-	-	0
% Bicycles on Crosswalk	-	-	-	-	-	-	0%	-	-	-	-	-	-	0%	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7:30AM - 8:30 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Crescent Str	reet						Fire Sta	tion						
Direction	Eastbound							Southea	stbound						
Time	R	T	L	HL	U	App	Ped*	HR	BR	BL	HL	U	Арр	Ped*	Int
2021-11-18 7:30AM	0	23	26	0	0	49	0	0	0	0	0	0	0	0	234
7:45AM	2	23	4	0	0	29	0	0	0	0	0	0	0	0	119
8:00AM	1	17	13	0	0	31	0	0	0	0	0	0	0	0	127
8:15AM	0	24	18	0	0	42	0	0	1	0	0	0	1	4	166
Total	3	87	61	0	0	151	0	0	1	0	0	0	1	4	646
% Approach	2.0%	57.6%	40.4%	0%	0%	-	-	0%	100%	0%	0%	0%	-	-	-
% Total	0.5%	13.5%	9.4%	0%	0%	23.4%	-	0%	0.2%	0%	0%	0%	0.2%	-	-
PHF	0.375	0.906	0.587	-	-	0.770	-	-	0.250	-	-	-	0.250	-	0.691
Motorcycles	0	0	0	0	0	0	-	0	0	0	0	0	0	-	1
% Motorcycles	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0.2%
Lights	3	84	59	0	0	146	-	0	0	0	0	0	0	-	610
% Lights	100%	96.6%	96.7%	0%	0%	96.7%	-	0%	0%	0%	0%	0%	0%	-	94.4%
Single-Unit Trucks	0	2	0	0	0	2	-	0	1	0	0	0	1	-	15
% Single-Unit Trucks	0%	2.3%	0%	0%	0%	1.3%	-	0%	100%	0%	0%	0%	100%	-	2.3%
Articulated Trucks	0	0	0	0	0	0	-	0	0	0	0	0	0	-	1
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0.2%
Buses	0	1	2	0	0	3	-	0	0	0	0	0	0	-	17
% Buses	0%	1.1%	3.3%	0%	0%	2.0%	-	0%	0%	0%	0%	0%	0%	-	2.6%
Bicycles on Road	0	0	0	0	0	0	-	0	0	0	0	0	0	-	2
% Bicycles on Road	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0.3%
Pedestrians	-	-	-	-	-	-	0	-	-	-	-	-	-	4	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	100%	-
Bicycles on Crosswalk	-	-	-	-	-	-	0	-	-	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	0%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


AM Peak (Nov 18 2021 7:30AM - 8:30 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

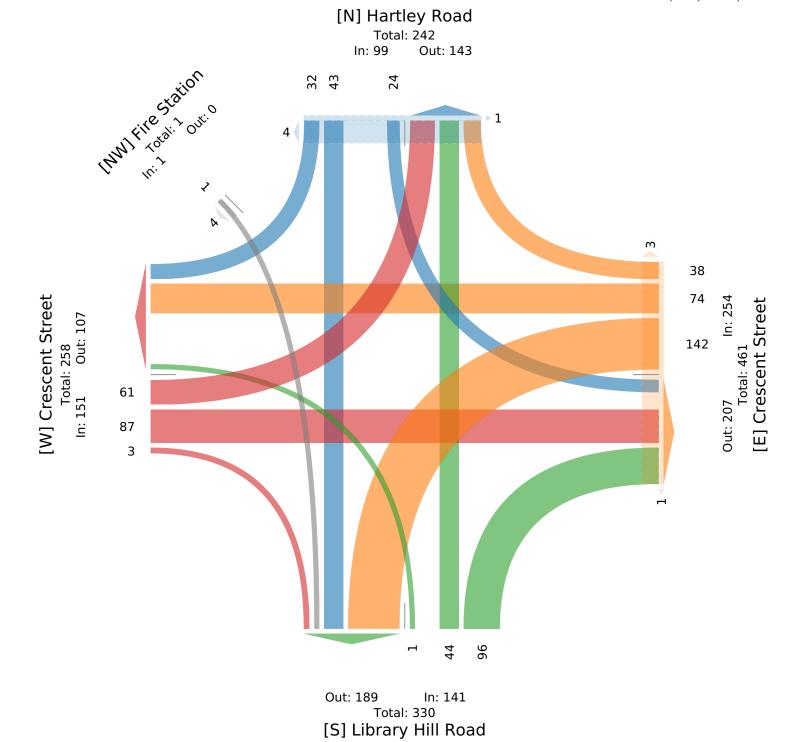

Thu Nov 18, 2021

PM Peak (Nov 18 2021 2:45PM - 3:45 PM) - Overall Peak Hour

 $All\ Classes\ (Motorcycles,\ Lights,\ Single-Unit\ Trucks,\ Articulated\ Trucks,\ Buses,\ Pedestrians,$

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Hartley Road							Crescent Street							Library Hill Road						
Direction	Southbound							Westbound							Northbound						
Time	HR	R	T	L	U	Арр	Ped*	R	BR	T	L	U	App	Ped*	R	T	BL	L	U	Арр	Ped*
2021-11-18 2:45PM	0	4	2	1	0	7	0	7	0	30	23	0	60	0	22	14	0	2	0	38	0
3:00PM	0	18	23	12	0	53	0	4	1	39	31	0	75	2	22	8	0	1	0	31	0
3:15PM	0	20	20	13	0	53	5	4	0	30	27	0	61	9	26	7	0	0	0	33	0
3:30PM	0	9	7	3	0	19	6	1	0	22	33	0	56	9	26	6	0	0	0	32	0
Total	0	51	52	29	0	132	11	16	1	121	114	0	252	20	96	35	0	3	0	134	0
% Approach	0%	38.6%	39.4%	22.0%	0%	-	-	6.3%	0.4%	48.0%	45.2%	0%	-	-	71.6%	26.1%	0%	2.2%	0%	-	-
% Total	0%	7.8%	7.9%	4.4%	0%	20.1%	-	2.4%	0.2%	18.4%	17.3%	0%	38.3%	-	14.6%	5.3%	0%	0.5%	0%	20.4%	-
PHF	-	0.638	0.565	0.558	-	0.623	-	0.571	0.250	0.769	0.864	-	0.837	-	0.913	0.625	-	0.375	-	0.899	-
Motorcycles	0	0	1	0	0	1	-	0	0	2	2	0	4	-	2	0	0	0	0	2	-
% Motorcycles	0%	0%	1.9%	0%	0%	0.8%	-	0%	0%	1.7%	1.8%	0%	1.6%	-	2.1%	0%	0%	0%	0%	1.5%	-
Lights	0	51	51	29	0	131	-	16	1	113	111	0	241	-	89	35	0	1	0	125	-
% Lights	0%	100%	98.1%	100%	0%	99.2%	-	100%	100%	93.4%	97.4%	0%	95.6%	-	92.7%	100%	0%	33.3%	0%	93.3%	-
Single-Unit Trucks	0	0	0	0	0	0	-	0	0	0	0	0	0	-	3	0	0	0	0	3	-
% Single-Unit Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	3.1%	0%	0%	0%	0%	2.2%	-
Articulated Trucks	0	0	0	0	0	0	-	0	0	1	1	0	2	-	1	0	0	0	0	1	-
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0.8%	0.9%	0%	0.8%	-	1.0%	0%	0%	0%	0%	0.7%	-
Buses	0	0	0	0	0	0	-	0	0	4	0	0	4	-	0	0	0	2	0	2	-
% Buses	0%	0%	0%	0%	0%	0%	-	0%	0%	3.3%	0%	0%	1.6%	-	0%	0%	0%	66.7%	0%	1.5%	-
Bicycles on Road	0	0	0	0	0	0	-	0	0	1	0	0	1	-	1	0	0	0	0	1	-
% Bicycles on Road	0%	0%	0%	0%	0%	0%	-	0%	0%	0.8%	0%	0%	0.4%	-	1.0%	0%	0%	0%	0%	0.7%	-
Pedestrians	-	-	-	-	-	-	11	-	-	-	-	-	-	20	-	-	-	-	-	-	0
% Pedestrians	-	-	-	-	-	-	100%	-	-	-	-	-	-	100%	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-		0	-	-		-	-	-	0	-		-	-	-	-	0
% Bicycles on Crosswalk	-	-	-	-	-	-	0%	-	-	-	-	-	-	0%	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021

PM Peak (Nov 18 2021 2:45PM - 3:45 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Crescent Str	eet						Fire St	ation						
Direction	Eastbound							Southe	astbou	nd					
Time	R	T	L	HL	U	App	Ped*	HR	BR	BL	HL	U	App	Ped*	Int
2021-11-18 2:45PM	1	34	9	0	0	44	0	0	0	0	0	0	0	0	149
3:00PM	1 2	30	4	1	0	37	0	0	0	2	0	0	2	1	198
3:15PM	1	20	10	0	0	31	0	0	0	0	0	0	0	6	178
3:30PM	1 3	18	5	0	0	26	0	0	0	0	0	0	0	6	133
Tota	7	102	28	1	0	138	0	0	0	2	0	0	2	13	658
% Approach	5.1%	73.9%	20.3%	0.7%	0%	-	-	0%	0%	100%	0%	0%	-	-	-
% Tota	1.1%	15.5%	4.3%	0.2%	0%	21.0%	-	0%	0%	0.3%	0%	0%	0.3%	-	-
PHI	0.500	0.765	0.700	0.250	-	0.810	-	-	-	0.250	-	-	0.250	-	0.826
Motorcycles	0	6	1	0	0	7	-	0	0	0	0	0	0	-	14
% Motorcycles	0%	5.9%	3.6%	0%	0%	5.1%	-	0%	0%	0%	0%	0%	0%	-	2.1%
Lights	6	86	27	0	0	119	-	0	0	0	0	0	0	-	616
% Lights	85.7%	84.3%	96.4%	0%	0%	86.2%	-	0%	0%	0%	0%	0%	0%	-	93.6%
Single-Unit Trucks	0	8	0	0	0	8	-	0	0	1	0	0	1	-	12
% Single-Unit Trucks	0%	7.8%	0%	0%	0%	5.8%	-	0%	0%	50.0%	0%	0%	50.0%	-	1.8%
Articulated Trucks	0	0	0	1	0	1	-	0	0	1	0	0	1	-	5
% Articulated Trucks	0%	0%	0%	100%	0%	0.7%	-	0%	0%	50.0%	0%	0%	50.0%	-	0.8%
Buses	0	1	0	0	0	1	-	0	0	0	0	0	0	-	7
% Buses	0%	1.0%	0%	0%	0%	0.7%	-	0%	0%	0%	0%	0%	0%	-	1.1%
Bicycles on Road	1	1	0	0	0	2	-	0	0	0	0	0	0	-	4
% Bicycles on Road	14.3%	1.0%	0%	0%	0%	1.4%	-	0%	0%	0%	0%	0%	0%	-	0.6%
Pedestrians	-	-	-	-	-	-	0	-	-	-	-	-	-	13	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	100%	-
Bicycles on Crosswall	-	-	-	-	-	-	0	-	-	-	-	-	-	0	
% Bicycles on Crosswall	-	-	-	-	-	-	-	-	-	-	-	-	-	0%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


PM Peak (Nov 18 2021 2:45PM - 3:45 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

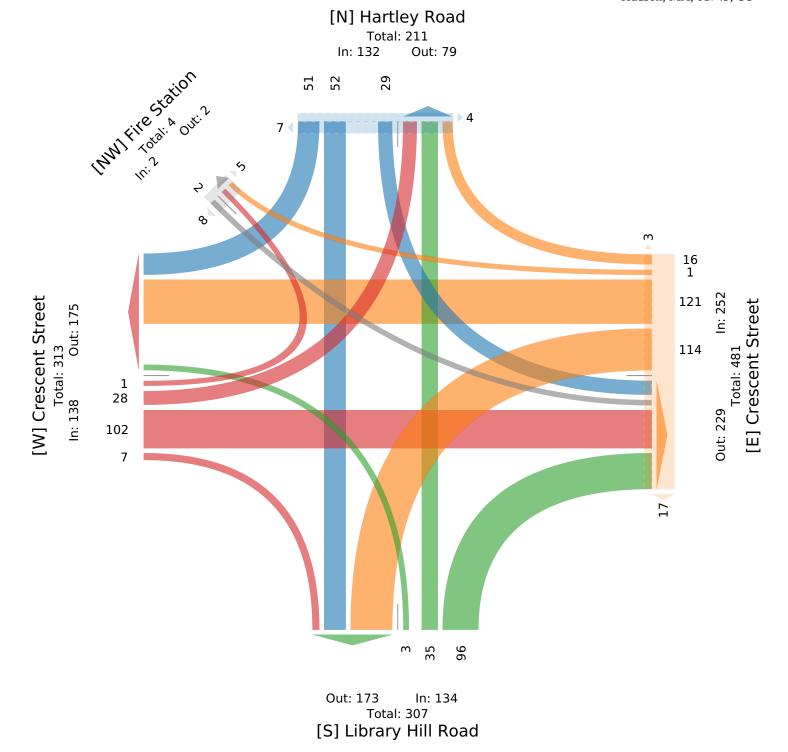

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Hart	ley Roac	l					Crescen	ıt Stı	eet					Library	Hill Ro	ad				
Direction	Sout	hbound						Westbo	und						Northbo	und					
Time	HR	R	T	L	U	Арр	Ped*	R	BR	T	L	U	Арр	Ped*	R	T	BL	L	U	App	Ped*
2021-11-20 10:00AM	0	1	3	0	0	4	4	1	0	21	24	0	46	0	24	0	0	0	0	24	0
10:15AM	0	2	2	3	0	7	1	0	0	25	26	0	51	0	21	1	0	1	0	23	0
10:30AM	0	0	1	2	0	3	0	0	0	13	28	0	41	0	16	0	0	0	0	16	0
10:45AM	0	0	1	1	0	2	0	0	0	24	27	0	51	1	16	0	0	0	0	16	0
Total	. 0	3	7	6	0	16	5	1	0	83	105	0	189	1	77	1	0	1	0	79	0
% Approach	0%	18.8%	43.8%	37.5% (0%	-	-	0.5%	0%	43.9%	55.6%	0%	-	-	97.5%	1.3%	0%	1.3%	0%	-	
% Total	0%	0.8%	2.0%	1.7% (0%	4.5%	-	0.3%	0%	23.2%	29.4%	0%	52.9%	-	21.6%	0.3%	0%	0.3%	0%	22.1%	-
PHF	-	0.375	0.583	0.500	-	0.571	-	0.250	-	0.830	0.938	-	0.926	-	0.802	0.250	-	0.250	-	0.823	-
Motorcycles	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	
% Motorcycles	0%	0%	0%	0% (0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	
Lights	0	3	7	6	0	16	-	1	0	81	104	0	186	-	75	1	0	1	0	77	-
% Lights	0%	100%	100%	100% (0%	100%	-	100%	0%	97.6%	99.0%	0%	98.4%	-	97.4%	100%	0%	100%	0%	97.5%	-
Single-Unit Trucks	0	0	0	0	0	0	-	0	0	2	0	0	2	-	2	0	0	0	0	2	_
% Single-Unit Trucks	0%	0%	0%	0% (0%	0%	-	0%	0%	2.4%	0%	0%	1.1%	-	2.6%	0%	0%	0%	0%	2.5%	_
Articulated Trucks	0	0	0	0	0	0	-	0	0	0	1	0	1	-	0	0	0	0	0	0	_
% Articulated Trucks	0%	0%	0%	0% (0%	0%	-	0%	0%	0%	1.0%	0%	0.5%	-	0%	0%	0%	0%	0%	0%	
Buses	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	_
% Buses	0%	0%	0%	0% (0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	_
Bicycles on Road	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	_
% Bicycles on Road	0%	0%	0%	0% (0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-
Pedestrians	-		-	-	-	-	5	-	_	-	-	-	-	1	-	-	-	-	-	-	0
% Pedestrians	-	-	-		-	-	100%	-		-	-	-	-	100%	-	-	-	-	-	-	
Bicycles on Crosswalk	-	-	-	-	-	-	0	-	_	-	-	-	-	0	-	-	-	-	-	-	0
% Bicycles on Crosswalk	-	-	-	-	-	-	0%	-	-	-	-	-	-	0%	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Cresce	nt Street						Fire Sta	ition						
Direction	Eastbo	und						Southea	astbour	nd					
Time		R	T I	HL	U	Арр	Ped*	HR	BR	BL	HL	U	App	Ped*	Int
2021-11-20 10:00	AM	1	14	. 0	0	16	0	0	0	0	0	0	0	4	90
10:15.	AM	0	18 (0	0	18	0	0	0	0	0	0	0	1	99
10:30.	AM	0	18 (0	0	18	0	0	0	0	0	0	0	0	78
10:45.	AM	0	21 () 0	0	21	0	0	0	0	0	0	0	0	90
Т	otal	1	71 1	. 0	0	73	0	0	0	0	0	0	0	5	357
% Appro	ach 1.4	1% 97.3	% 1.4%	0%	0%	-	-	0%	0%	0%	0%	0%	-	-	-
% T	otal 0.3	3% 19.9	% 0.3%	0%	0%	20.4%	-	0%	0%	0%	0%	0%	0%	-	-
I	HF 0.2	50 0.8	45 0.250	-	-	0.869	-	-	-	-	-	-	-	-	0.902
Motorcy	eles	0	0 (0	0	0	-	0	0	0	0	0	0	-	0
% Motorcy	eles)% (0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	0%
Lig	hts	1	69 1	. 0	0	71	-	0	0	0	0	0	0	-	350
% Lią	hts 10)% 97.2	% 100%	0%	0%	97.3%	-	0%	0%	0%	0%	0%	-	-	98.0%
Single-Unit Tru	cks	0	2 (0	0	2	-	0	0	0	0	0	0	-	6
% Single-Unit Tru	cks)% 2.8	% 0%	0%	0%	2.7%	-	0%	0%	0%	0%	0%	-	-	1.7%
Articulated Tru	cks	0	0 (0	0	0	-	0	0	0	0	0	0	-	1
% Articulated Tru	cks)% (0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	0.3%
Bı	ses	0	0 (0	0	0	-	0	0	0	0	0	0	-	0
% Bı	ses)% (0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	0%
Bicycles on R	oad	0	0 (0	0	0	-	0	0	0	0	0	0	-	0
% Bicycles on R	oad)% (0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	0%
Pedestri	ans	-	-	-	-	-	0	-	-	-	-	-	-	5	
% Pedestri	ans	-	-		-	-	-	-	-	-	-	-	-	100%	-
Bicycles on Crossw	alk	-	-	-	-	-	0	-			_	-	-	0	
% Bicycles on Crossw	alk	-	-		-	-	-	-	-	-	-	-	-	0%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)


All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US

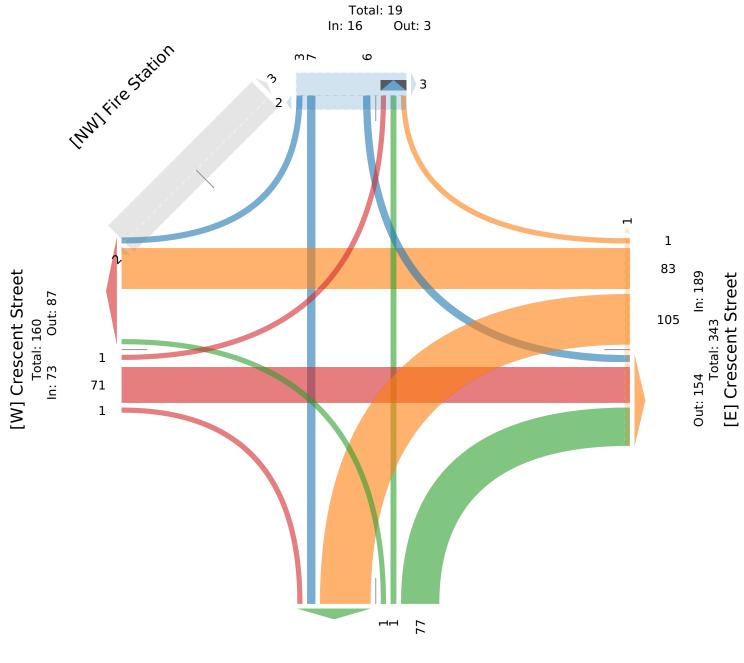

[N] Hartley Road

Out: 113 In: 79 Total: 192 [S] Library Hill Road

Sat Nov 20, 2021

Midday Peak (WKND) (Nov 20 2021 12:30PM - 1:30 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Hartl	ley Road	l					Crescen	t Stre	eet					Library I	Hill Roa	d				
Direction	Sout	hbound						Westbo	und						Northbo	und					
Time	HR	R	T	L	U	Арр	Ped*	R	BR	T	L	U	App	Ped*	R	T	BL	L	U	App	Ped*
2021-11-20 12:30PM	0	0	0	0	0	0	0	4	0	26	24	0	54	0	20	4	1	0	0	25	0
12:45PM	0	0	1	0	0	1	2	3	0	22	25	0	50	0	30	4	0	0	0	34	0
1:00PM	0	0	1	0	0	1	7	11	0	16	33	0	60	2	28	12	0	0	0	40	0
1:15PM	0	1	1	0	0	2	1	5	0	26	28	0	59	1	40	4	0	0	0	44	0
Total	0	1	3	0	0	4	10	23	0	90	110	0	223	3	118	24	1	0	0	143	0
% Approach	0%	25.0%	75.0%	0%	0%	-	-	10.3%	0%	40.4%	49.3%	0%	-	-	82.5%	16.8%	0.7%	0%	0%	-	-
% Total	0%	0.2%	0.5%	0%	0%	0.6%	-	3.7%	0%	14.5%	17.8%	0%	36.0%	-	19.1%	3.9%	0.2%	0%	0%	23.1%	-
PHF	-	0.250	0.750	-	-	0.500	-	0.679	-	0.865	0.833	-	0.928	-	0.719	0.523	0.250	-	-	0.790	-
Motorcycles	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	-
% Motorcycles	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-
Lights	0	1	3	0	0	4	-	18	0	88	108	0	214	-	113	23	1	0	0	137	-
% Lights	0%	100%	100%	0%	0%	100%	-	78.3%	0%	97.8%	98.2%	0%	96.0%	-	95.8%	95.8%	100%	0%	0%	95.8%	-
Single-Unit Trucks	0	0	0	0	0	0	-	1	0	2	2	0	5	-	1	0	0	0	0	1	-
% Single-Unit Trucks	0%	0%	0%	0%	0%	0%	-	4.3%	0%	2.2%	1.8%	0%	2.2%	-	0.8%	0%	0%	0%	0%	0.7%	-
Articulated Trucks	0	0	0	0	0	0	-	0	0	0	0	0	0	-	1	0	0	0	0	1	-
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0.8%	0%	0%	0%	0%	0.7%	-
Buses	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	-
% Buses	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-
Bicycles on Road	0	0	0	0	0	0	-	4	0	0	0	0	4	-	3	1	0	0	0	4	-
% Bicycles on Road	0%	0%	0%	0%	0%	0%	-	17.4%	0%	0%	0%	0%	1.8%	-	2.5%	4.2%	0%	0%	0%	2.8%	-
Pedestrians	-	-	-	-	-	-	6	-	-	-	-	-	-	0	-		-	-	-	-	0
% Pedestrians	-	-	-	-	-	-	60.0%	-	-	-	-	-	-	0%	-	-	-	-	_	-	-
Bicycles on Crosswalk	-	-	-	-	-	-	4	-	-	-	-	-	-	3	-	-	-	-	-	-	0
% Bicycles on Crosswalk	-	-	-	-	-	-	40.0%	-	-	-	-	-	-	100%	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

Midday Peak (WKND) (Nov 20 2021 12:30PM - 1:30 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

Dicycles on Road, Dicycl

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Crescent Str	eet						Fire Sta	tion						
Direction	Eastbound							Southea	stbound						
Time	R	T	L	HL	U	Арр	Ped*	HR	BR	BL	HL	U	App	Ped*	Int
2021-11-20 12:30PM	3	60	3	0	0	66	0	0	0	0	0	0	0	0	145
12:45PM	0	65	7	0	0	72	0	0	1	0	0	0	1	2	158
1:00PM	0	52	2	0	0	54	0	0	0	0	0	0	0	4	155
1:15PM	2	51	3	0	0	56	0	0	0	0	0	0	0	1	161
Total	5	228	15	0	0	248	0	0	1	0	0	0	1	7	619
% Approach	2.0%	91.9%	6.0%	0%	0%	-	-	0%	100%	0%	0%	0%	-	-	-
% Total	0.8%	36.8%	2.4%	0%	0%	40.1%	-	0%	0.2%	0%	0%	0%	0.2%	-	-
PHF	0.500	0.877	0.536	-	-	0.858	-	-	0.250	-	-	-	0.250	-	0.947
Motorcycles	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0
% Motorcycles	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%
Lights	4	222	15	0	0	241	-	0	1	0	0	0	1	-	597
% Lights	80.0%	97.4%	100%	0%	0%	97.2%	-	0%	100%	0%	0%	0%	100%	-	96.4%
Single-Unit Trucks	0	3	0	0	0	3	-	0	0	0	0	0	0	-	9
% Single-Unit Trucks	0%	1.3%	0%	0%	0%	1.2%	-	0%	0%	0%	0%	0%	0%	-	1.5%
Articulated Trucks	0	1	0	0	0	1	-	0	0	0	0	0	0	-	2
% Articulated Trucks	0%	0.4%	0%	0%	0%	0.4%	-	0%	0%	0%	0%	0%	0%	-	0.3%
Buses	0	2	0	0	0	2	-	0	0	0	0	0	0	-	2
% Buses	0%	0.9%	0%	0%	0%	0.8%	-	0%	0%	0%	0%	0%	0%	-	0.3%
Bicycles on Road	1	0	0	0	0	1	-	0	0	0	0	0	0	-	9
% Bicycles on Road	20.0%	0%	0%	0%	0%	0.4%	-	0%	0%	0%	0%	0%	0%	-	1.5%
Pedestrians	-	-	-	-	-	-	0	-	-	-	-	-	-	6	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	85.7%	-
Bicycles on Crosswalk	-	-	-	-	-	-	0	-	-	-	-	-	-	1	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	14.3%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


Midday Peak (WKND) (Nov 20 2021 12:30PM - 1:30 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

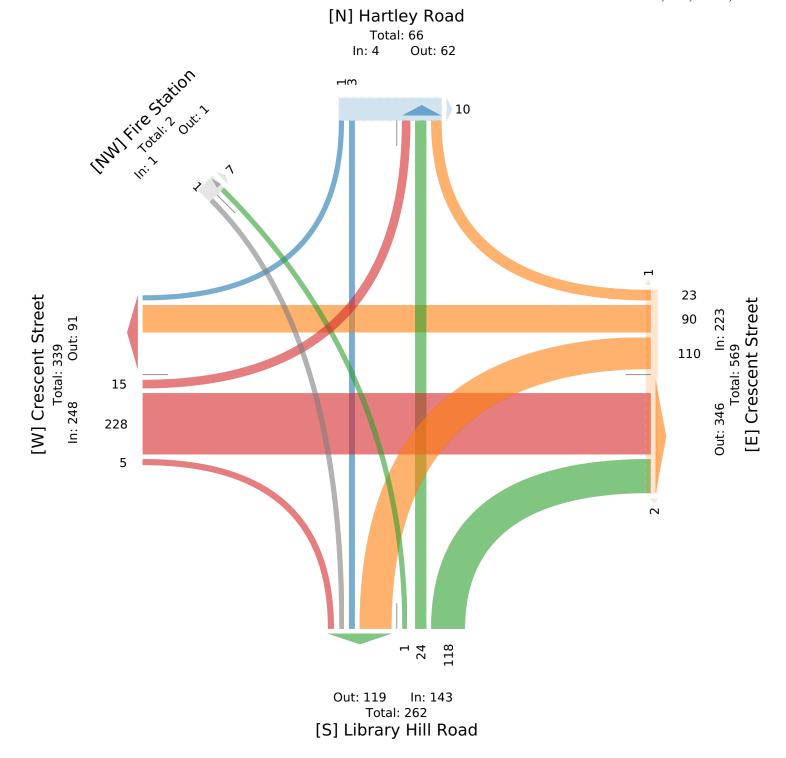

Sat Nov 20, 2021

PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Hart	ley Roac	ì					Crescen	it Stre	eet					Library	Hill Roa	d				
Direction	Sout	hbound						Westbo	und						Northbo	und					
Time	HR	R	T	L	U	Арр	Ped*	R	BR	T	L	U	Арр	Ped*	R	T	BL	L	U	App	Ped*
2021-11-20 1:00PM	0	0	1	0	0	1	7	11	0	16	33	0	60	2	28	12	0	0	0	40	0
1:15PM	0	1	1	0	0	2	1	5	0	26	28	0	59	1	40	4	0	0	0	44	0
1:30PM	0	0	0	0	0	0	2	2	0	31	27	0	60	0	25	5	0	0	0	30	0
1:45PM	0	1	1	0	0	2	1	2	0	26	34	0	62	0	23	2	0	5	0	30	0
Total	. 0	2	3	0	0	5	11	20	0	99	122	0	241	3	116	23	0	5	0	144	0
% Approach	0%	40.0%	60.0%	0%	0%	-	-	8.3%	0%	41.1%	50.6%	0%	-	-	80.6%	16.0%	0%	3.5%	0%	-	-
% Total	0%	0.4%	0.6%	0%	0%	0.9%	-	3.7%	0%	18.2%	22.4%	0%	44.2%	-	21.3%	4.2%	0%	0.9%	0%	26.4%	-
PHF	-	0.500	0.750	-	-	0.625	-	0.571	-	0.798	0.897	-	0.956	-	0.706	0.500	-	0.250	-	0.795	-
Motorcycles	0	0	0	0	0	0	-	0	0	0	1	0	1	-	1	0	0	1	0	2	-
% Motorcycles	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0.8%	0%	0.4%	-	0.9%	0%	0%	20.0%	0%	1.4%	-
Lights	0	2	3	0	0	5	-	16	0	97	120	0	233	-	110	22	0	4	0	136	-
% Lights	0%	100%	100%	0%	0%	100%	-	80.0%	0%	98.0%	98.4%	0%	96.7%	-	94.8%	95.7%	0%	80.0%	0%	94.4%	_
Single-Unit Trucks	0	0	0	0	0	0	-	0	0	2	1	0	3	-	1	0	0	0	0	1	-
% Single-Unit Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	2.0%	0.8%	0%	1.2%	-	0.9%	0%	0%	0%	0%	0.7%	_
Articulated Trucks	0	0	0	0	0	0	-	0	0	0	0	0	0	-	1	0	0	0	0	1	_
% Articulated Trucks	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0.9%	0%	0%	0%	0%	0.7%	-
Buses	0	0	0	0	0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	-
% Buses	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	0%	-
Bicycles on Road	. 0	0	0	0	0	0	-	4	0	0	0	0	4	-	3	1	0	0	0	4	_
% Bicycles on Road	0%	0%	0%	0%	0%	0%	-	20.0%	0%	0%	0%	0%	1.7%	-	2.6%	4.3%	0%	0%	0%	2.8%	-
Pedestrians	-	-	-	-	-	-	7	-		-	-	-	-	0	-	-	-	-	-	-	0
% Pedestrians	-		-	-	-	-	63.6%	-		-	-	-	-	0%	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	-	-	4	-	-	-	-	-	-	3	-	-	-	-	-	-	0
% Bicycles on Crosswalk	-	-	-	-	-	-	36.4%	-	-	-	-	-	-	100%	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Leg	Crescent S	Street						Fire Sta	ition						
Direction	Eastbound	ì						Southea	astbour	nd					
Time	R	T	L	HL	U	Арр	Ped*	HR	BR	BL	HL	U	Арр	Ped*	Int
2021-11-20 1:00	PM 0	52	2	0	0	54	0	0	0	0	0	0	0	4	155
1:15	PM 2	51	3	0	0	56	0	0	0	0	0	0	0	1	161
1:30	PM 1	22	0	0	0	23	0	0	0	0	0	0	0	0	113
1:45	PM 0	22	0	0	0	22	0	0	0	0	0	0	0	1	116
Te	tal 3	147	5	0	0	155	0	0	0	0	0	0	0	6	545
% Appro	1.9%	94.8%	3.2%	0%	0%	-	-	0%	0%	0%	0%	0%	-	-	-
% To	tal 0.6%	27.0%	0.9%	0%	0%	28.4%	-	0%	0%	0%	0%	0%	0%	-	-
P	HF 0.375	0.707	0.417	-	-	0.692	-	-	-	-	-	-	-	-	0.834
Motorcyc	les 0	0	0	0	0	0	-	0	0	0	0	0	0	-	3
% Motorcyc	les 0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	0.6%
Lig	hts 3	142	5	0	0	150	-	0	0	0	0	0	0	-	524
% Lig	hts 100%	96.6%	100%	0%	0%	96.8%	-	0%	0%	0%	0%	0%	-	-	96.1%
Single-Unit True	ks 0	2	0	0	0	2	-	0	0	0	0	0	0	-	6
% Single-Unit True	ks 0%	1.4%	0%	0%	0%	1.3%	-	0%	0%	0%	0%	0%	-	-	1.1%
Articulated True	ks 0	1	0	0	0	1	-	0	0	0	0	0	0	-	2
% Articulated True	ks 0%	0.7%	0%	0%	0%	0.6%	-	0%	0%	0%	0%	0%	-	-	0.4%
Bu	ses 0	2	0	0	0	2	-	0	0	0	0	0	0	-	2
% Bu	ses 0%	1.4%	0%	0%	0%	1.3%	-	0%	0%	0%	0%	0%	-	-	0.4%
Bicycles on Ro	ad 0	0	0	0	0	0	-	0	0	0	0	0	0	-	8
% Bicycles on Ro	ad 0%	0%	0%	0%	0%	0%	-	0%	0%	0%	0%	0%	-	-	1.5%
Pedestri	ıns -	-	-	-	-	-	0	-	-	-	-	-	-	5	
% Pedestri	ins -	-	-	-	-	-	-	-	-	-	-	-	-	83.3%	-
Bicycles on Crossw	alk -	-	-	-	-	-	0	-	-	-	-	-	-	1	
% Bicycles on Crossw	alk -	-	-	-	-	-	-	-	-	-	-	-	-	16.7%	-

^{*}Pedestrians and Bicycles on Crosswalk. BL: Bear left, BR: Bear right, HL: Hard left, HR: Hard right, L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)


All Movements

ID: 902918, Location: 42.437208, -71.505149, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US



Total: 53 In: 5 Out: 48

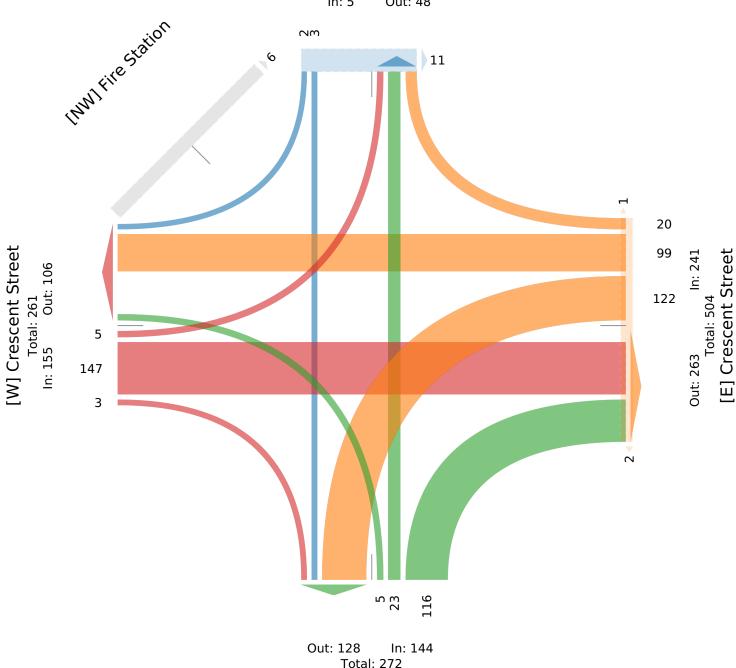

Total: 272 [S] Library Hill Road

Thu Nov 18, 2021

Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent	Street				Great Ro	ad (Rout	e 117))		Great Roa	d (Route	117)			
Direction	Southbo	ınd				Westbou	ınd				Eastbound	1				
Time	R	L	U	App	Ped*	R	T	U	Арр	Ped*	T	L	U	Арр	Ped*	Int
2021-11-18 7:00	AM 100	0	1	101	0	1	255	0	256	0	652	160	0	812	-	1169
8:00	AM 106	0	0	106	0	1	269	0	270	0	499	140	0	639	-	1015
9:00	AM 72	0	0	72	0	1	225	0	226	0	320	76	0	396	-	694
10:00	AM 76	0	0	76	0	0	277	0	277	0	266	79	1	346	-	699
2:00	PM 127	0	0	127	2	2	448	0	450	1	303	128	0	431	-	1008
3:00	PM 180	0	0	180	0	3	628	0	631	0	306	122	0	428	-	1239
4:00	PM 152	1	0	153	9	1	692	0	693	0	335	105	0	440	-	1286
5:00	PM 120	0	0	120	7	3	735	0	738	0	322	76	0	398	-	1256
2021-11-20 10:00	AM 85	0	0	85	0	0	328	0	328	0	328	73	0	401	-	814
11:00	AM 96	4	0	100	1	1	381	0	382	0	366	68	0	434	-	916
12:00	PM 100	2	0	102	0	1	415	0	416	0	349	188	0	537	-	1055
1:00	PM 103	0	0	103	2	0	392	0	392	0	324	153	0	477	-	972
Т	otal 1317	7	1	1325	21	14	5045	0	5059	1	4370	1368	1	5739	-	12123
% Appro	ach 99.4%	0.5%	0.1%	-	-	0.3%	99.7%	0%	-	-	76.1%	23.8%	0%	-	-	-
% T	otal 10.9%	0.1%	0%	10.9%	-	0.1%	41.6%	0%	41.7%	-	36.0%	11.3%	0%	47.3%	-	-
Motorcy	cles 7	0	0	7	-	0	26	0	26	-	22	13	0	35	-	68
% Motorcy	cles 0.5%	0%	0%	0.5%	-	0%	0.5%	0%	0.5%	-	0.5%	1.0%	0%	0.6%	-	0.6%
Li	hts 1253	7	1	1261	-	14	4845	0	4859	-	4192	1304	1	5497	-	11617
% Li	hts 95.1%	100%	100%	95.2%	-	100%	96.0%	0%	96.0%	-	95.9%	95.3%	100%	95.8%	-	95.8%
Single-Unit Tru	cks 26	0	0	26	-	0	107	0	107	-	100	34	0	134	-	267
% Single-Unit Tru	cks 2.0%	0%	0%	2.0%	-	0%	2.1%	0%	2.1%	-	2.3%	2.5%	0%	2.3%	-	2.2%
Articulated Tru	cks 3	0	0	3	-	0	44	0	44	-	38	5	0	43	-	90
% Articulated Tru	cks 0.2%	0%	0%	0.2%	-	0%	0.9%	0%	0.9%	-	0.9%	0.4%	0%	0.7%	-	0.7%
B	ises 21	0	0	21	-	0	17	0	17	-	14	11	0	25	-	63
% Bı	ses 1.6%	0%	0%	1.6%	-	0%	0.3%	0%	0.3%	-	0.3%	0.8%	0%	0.4%	-	0.5%
Bicycles on R	oad 7	0	0	7	-	0	6	0	6	-	4	1	0	5	-	18
% Bicycles on R	oad 0.5%	0%	0%	0.5%	-	0%	0.1%	0%	0.1%	-	0.1%	0.1%	0%	0.1%	-	0.1%
Pedestr	ans -	-	-	-	21	-	-	-	-	1	-	-	-	-	0	
% Pedestr	ans -	-	-	-	100%	-	-	-	-	100%	-	-	-	-	-	-
Bicycles on Crossy	alk -	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crossv	alk -	-	-	-	0%	-	-	-	-	0%	-	-	-	-	-	_

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

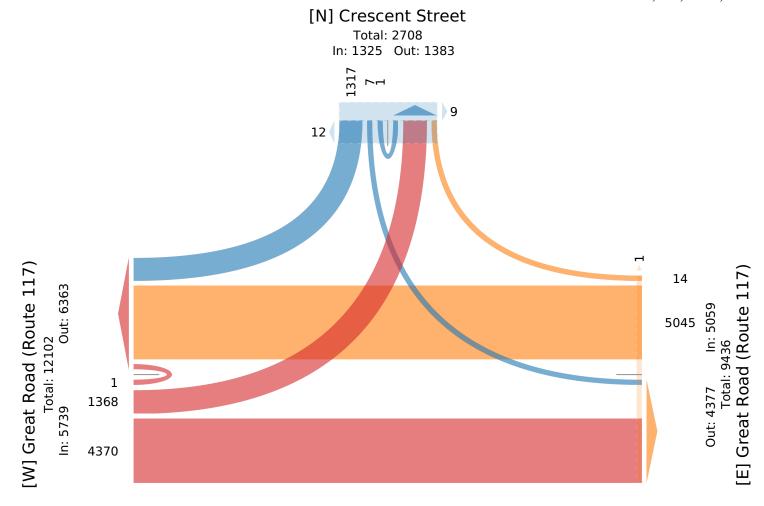

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent S	Street				Great Roa	ad (Route	117)			Great Road	d (Route 1	17)			
Direction	Southbour	nd				Westbour	nd				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	App	Ped*	T	L	U	Арр	Ped*	Int
2021-11-18 7:00AM	23	0	0	23	0	1	63	0	64	0	159	32	0	191	-	278
7:15AM	22	0	1	23	0	0	64	0	64	0	163	40	0	203	-	290
7:30AM	36	0	0	36	0	0	74	0	74	0	169	56	0	225	-	335
7:45AM	19	0	0	19	0	0	54	0	54	0	161	32	0	193	-	266
Total	100	0	1	101	0	1	255	0	256	0	652	160	0	812	-	1169
% Approach	99.0%	0%	1.0%	-	-	0.4%	99.6%	0%	-	-	80.3%	19.7%	0%	-	-	-
% Total	8.6%	0%	0.1%	8.6%	-	0.1%	21.8%	0%	21.9%	-	55.8%	13.7%	0%	69.5%	-	-
PHF	0.688	-	0.250	0.694	-	0.250	0.866	-	0.870	-	0.964	0.714	-	0.902	-	0.873
Motorcycles	0	0	0	0	-	0	1	0	1	-	1	0	0	1	-	2
% Motorcycles	0%	0%	0%	0%	-	0%	0.4%	0%	0.4%	-	0.2%	0%	0%	0.1%	-	0.2%
Lights	94	0	1	95	-	1	234	0	235	-	624	154	0	778	-	1108
% Lights	94.0%	0%	100%	94.1%	-	100%	91.8%	0%	91.8%	-	95.7%	96.3%	0%	95.8%	-	94.8%
Single-Unit Trucks	1	0	0	1	-	0	11	0	11	-	18	4	0	22	-	34
% Single-Unit Trucks	1.0%	0%	0%	1.0%	-	0%	4.3%	0%	4.3%	-	2.8%	2.5%	0%	2.7%	-	2.9%
Articulated Trucks	0	0	0	0	-	0	7	0	7	-	7	0	0	7	-	14
% Articulated Trucks	0%	0%	0%	0%	-	0%	2.7%	0%	2.7%	-	1.1%	0%	0%	0.9%	-	1.2%
Buses	4	0	0	4	-	0	0	0	0	-	2	2	0	4	-	8
% Buses	4.0%	0%	0%	4.0%	-	0%	0%	0%	0%	-	0.3%	1.3%	0%	0.5%	-	0.7%
Bicycles on Road	1	0	0	1	-	0	2	0	2	-	0	0	0	0	-	3
% Bicycles on Road	1.0%	0%	0%	1.0%	-	0%	0.8%	0%	0.8%	-	0%	0%	0%	0%	-	0.3%
Pedestrians	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn


Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

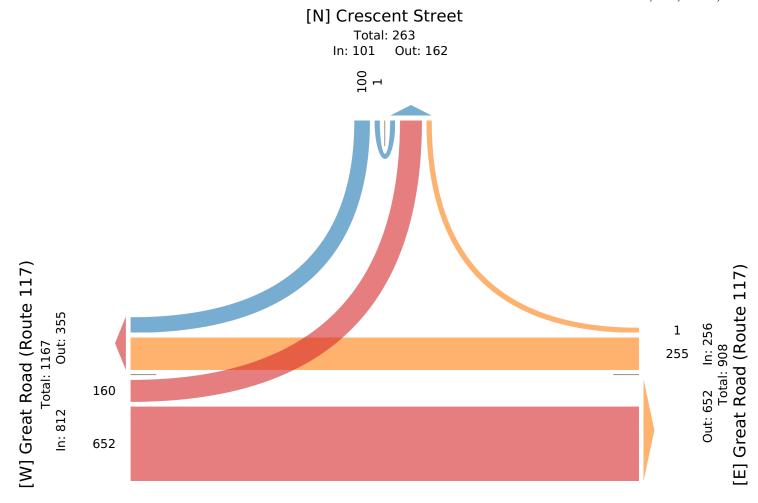

Thu Nov 18, 2021

PM Peak (Nov 18 2021 4:45PM - 5:45 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent S	treet				Great Roa	nd (Route	117)			Great Road	d (Route 1	17)			
Direction	Southboun	ıd				Westbour	nd				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	App	Ped*	T	L	U	Арр	Ped*	Int
2021-11-18 4:45PM	37	1	0	38	0	0	184	0	184	0	80	31	0	111	-	333
5:00PM	37	0	0	37	1	2	201	0	203	0	79	16	0	95	-	335
5:15PM	26	0	0	26	4	0	188	0	188	0	83	20	0	103	-	317
5:30PM	26	0	0	26	2	1	207	0	208	0	78	20	0	98	-	332
Total	126	1	0	127	7	3	780	0	783	0	320	87	0	407	-	1317
% Approach	99.2%	0.8%	0%	-	-	0.4%	99.6%	0%	-	-	78.6%	21.4%	0%	-	-	-
% Total	9.6%	0.1%	0%	9.6%	-	0.2%	59.2%	0%	59.5%	-	24.3%	6.6%	0%	30.9%	-	-
PHF	0.851	0.250	-	0.836	-	0.375	0.942	-	0.941	-	0.961	0.702	-	0.914	-	0.985
Motorcycles	0	0	0	0	-	0	5	0	5	-	1	1	0	2	-	7
% Motorcycles	0%	0%	0%	0%	-	0%	0.6%	0%	0.6%	-	0.3%	1.1%	0%	0.5%	-	0.5%
Lights	125	1	0	126	-	3	758	0	761	-	308	86	0	394	-	1281
% Lights	99.2%	100%	0%	99.2%	-	100%	97.2%	0%	97.2%	-	96.3%	98.9%	0%	96.8%	-	97.3%
Single-Unit Trucks	1	0	0	1	-	0	12	0	12	-	8	0	0	8	-	21
% Single-Unit Trucks	0.8%	0%	0%	0.8%	-	0%	1.5%	0%	1.5%	-	2.5%	0%	0%	2.0%	-	1.6%
Articulated Trucks	0	0	0	0	-	0	3	0	3	-	2	0	0	2	-	5
% Articulated Trucks	0%	0%	0%	0%	-	0%	0.4%	0%	0.4%	-	0.6%	0%	0%	0.5%	-	0.4%
Buses	0	0	0	0	-	0	2	0	2	-	0	0	0	0	-	2
% Buses	0%	0%	0%	0%	-	0%	0.3%	0%	0.3%	-	0%	0%	0%	0%	-	0.2%
Bicycles on Road		0	0	0	-	0	0	0	0	-	1	0	0	1	-	1
% Bicycles on Road		0%	0%	0%	-	0%	0%	0%	0%	-	0.3%	0%	0%	0.2%	-	0.1%
Pedestrians		-	-	-	7	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	0%	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


PM Peak (Nov 18 2021 4:45PM - 5:45 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

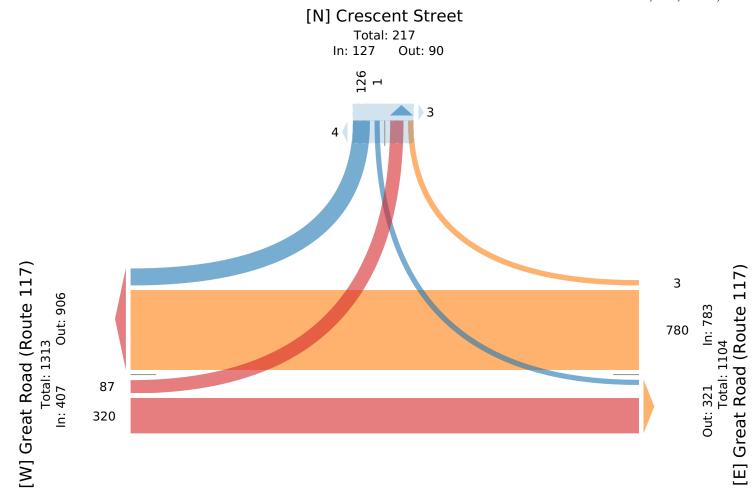

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

 $All\ Classes\ (Motorcycles,\ Lights,\ Single-Unit\ Trucks,\ Articulated\ Trucks,\ Buses,\ Pedestrians,$

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent S	treet				Great 1	Road (Rou	ite 117	")		Great Road	(Route 11	17)			
Direction	Southboun	ıd				Westb	ound				Eastbound					
Time	R	L	U	Арр	Ped*	R	T	U	Арр	Ped*	T	L	U	Арр	Ped*	Int
2021-11-20 10:00AM	23	0	0	23	0	0	87	0	87	0	69	17	0	86	-	196
10:15AM	27	0	0	27	0	0	84	0	84	0	72	17	0	89	-	200
10:30AM	13	0	0	13	0	0	86	0	86	0	94	18	0	112	-	211
10:45AM	22	0	0	22	0	0	71	0	71	0	93	21	0	114	-	207
Total	85	0	0	85	0	0	328	0	328	0	328	73	0	401	-	814
% Approach	100%	0%	0%	-	-	0%	100%	0%	-	-	81.8%	18.2%	0%	-	-	-
% Total	10.4%	0%	0%	10.4%	-	0%	40.3%	0%	40.3%	-	40.3%	9.0%	0%	49.3%	-	-
PHF	0.787	-	-	0.787	-	-	0.951	-	0.951	-	0.872	0.869	-	0.879	-	0.963
Motorcycles	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Motorcycles	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Lights	83	0	0	83	-	0	313	0	313	-	325	73	0	398	-	794
% Lights	97.6%	0%	0%	97.6%	-	0%	95.4%	0%	95.4%	-	99.1%	100%	0%	99.3%	-	97.5%
Single-Unit Trucks	2	0	0	2	-	0	7	0	7	-	2	0	0	2	-	11
% Single-Unit Trucks	2.4%	0%	0%	2.4%	-	0%	2.1%	0%	2.1%	-	0.6%	0%	0%	0.5%	-	1.4%
Articulated Trucks	0	0	0	0	-	0	7	0	7	-	1	0	0	1	-	8
% Articulated Trucks	0%	0%	0%	0%	-	0%	2.1%	0%	2.1%	-	0.3%	0%	0%	0.2%	-	1.0%
Buses	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Buses	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Bicycles on Road	0	0	0	0	-	0	1	0	1	-	0	0	0	0	-	1
% Bicycles on Road	0%	0%	0%	0%	-	0%	0.3%	0%	0.3%	-	0%	0%	0%	0%	-	0.1%
Pedestrians	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

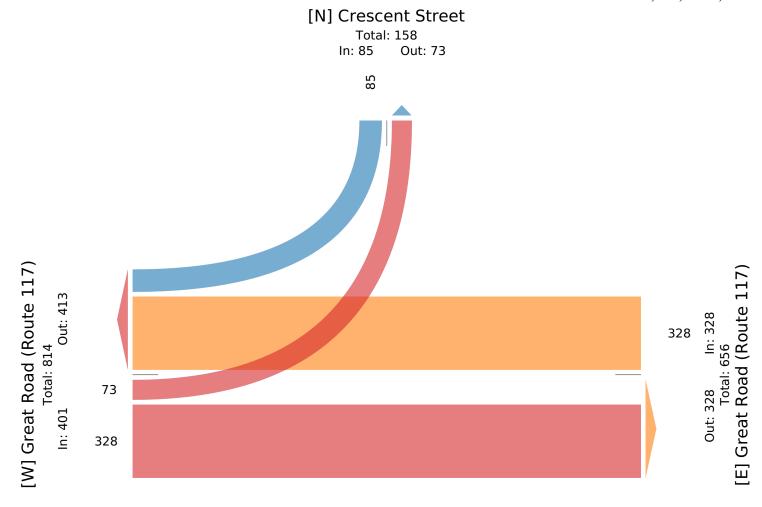

Sat Nov 20, 2021

Midday Peak (WKND) (Nov 20 2021 12:15PM - 1:15 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent S	treet				Great Roa	ad (Route	117)			Great Road	d (Route 1	117)			
Direction	Southbour	ıd				Westbour	nd				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	App	Ped*	T	L	U	Арр	Ped*	Int
2021-11-20 12:15PM	24	0	0	24	0	0	125	0	125	0	81	31	0	112	-	261
12:30PM	27	0	0	27	0	1	95	0	96	0	84	64	0	148	-	271
12:45PM	20	2	0	22	0	0	91	0	91	0	99	74	0	173	-	286
1:00PM	16	0	0	16	0	0	92	0	92	0	77	54	0	131	-	239
Total	. 87	2	0	89	0	1	403	0	404	0	341	223	0	564	-	1057
% Approach	97.8%	2.2%	0%	_	-	0.2%	99.8%	0%	-	-	60.5%	39.5%	0%	-	-	-
% Total	8.2%	0.2%	0%	8.4%	-	0.1%	38.1%	0%	38.2%	-	32.3%	21.1%	0%	53.4%	-	-
PHF	0.806	0.250	-	0.824	-	0.250	0.806	-	0.808	-	0.861	0.753	-	0.815	-	0.924
Motorcycles	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Motorcycles	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Lights	86	2	0	88	-	1	397	0	398	-	330	220	0	550	-	1036
% Lights	98.9%	100%	0%	98.9%	-	100%	98.5%	0%	98.5%	-	96.8%	98.7%	0%	97.5%	-	98.0%
Single-Unit Trucks	1	0	0	1	-	0	6	0	6	-	8	3	0	11	-	18
% Single-Unit Trucks	1.1%	0%	0%	1.1%	-	0%	1.5%	0%	1.5%	-	2.3%	1.3%	0%	2.0%	-	1.7%
Articulated Trucks	0	0	0	0	-	0	0	0	0	-	2	0	0	2	-	2
% Articulated Trucks	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0.6%	0%	0%	0.4%	-	0.2%
Buses	0	0	0	0	-	0	0	0	0	-	1	0	0	1	-	1
% Buses	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0.3%	0%	0%	0.2%	-	0.1%
Bicycles on Road	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Bicycles on Road	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Pedestrians	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


Midday Peak (WKND) (Nov 20 2021 12:15PM - 1:15 PM)

 $All\ Classes\ (Motorcycles,\ Lights,\ Single-Unit\ Trucks,\ Articulated\ Trucks,\ Buses,\ Pedestrians,$

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

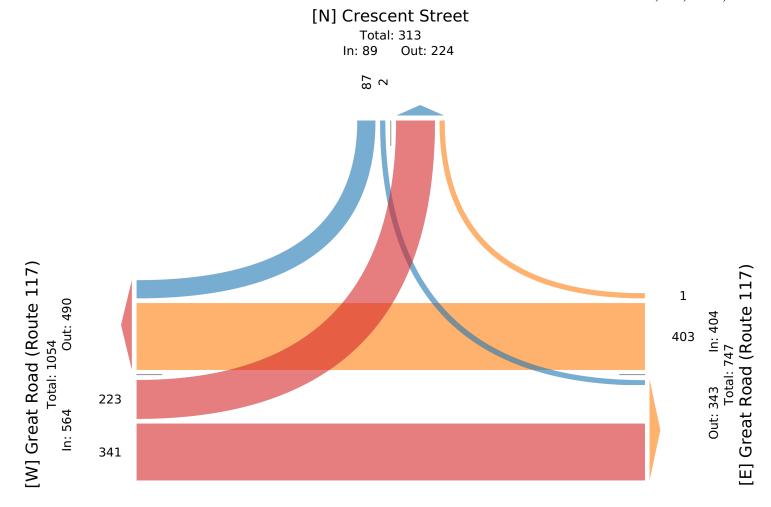

Sat Nov 20, 2021

PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

Leg	Crescent S	Street				Great 1	Road (Ro	ıte 117	")		Great Road					
Direction	Southbour	nd				Westb	ound				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	Арр	Ped*	T	L	U	App	Ped*	Int
2021-11-20 1:00PM	16	0	0	16	0	0	92	0	92	0	77	54	0	131	-	239
1:15PM	26	0	0	26	0	0	94	0	94	0	75	53	0	128	-	248
1:30PM	32	0	0	32	0	0	108	0	108	0	83	24	0	107	-	247
1:45PM	29	0	0	29	2	0	98	0	98	0	89	22	0	111	-	238
Total	103	0	0	103	2	0	392	0	392	0	324	153	0	477	-	972
% Approach	100%	0%	0%	-	-	0%	100%	0%	-	-	67.9%	32.1%	0%	-	-	-
% Total	10.6%	0%	0%	10.6%	-	0%	40.3%	0%	40.3%	-	33.3%	15.7%	0%	49.1%	-	-
PHF	0.805	-	-	0.805	-	-	0.907	-	0.907	-	0.907	0.708	-	0.908	-	0.979
Motorcycles	1	0	0	1	-	0	1	0	1	-	1	0	0	1	-	3
% Motorcycles	1.0%	0%	0%	1.0%	-	0%	0.3%	0%	0.3%	-	0.3%	0%	0%	0.2%	-	0.3%
Lights	101	0	0	101	-	0	382	0	382	-	317	145	0	462	-	945
% Lights	98.1%	0%	0%	98.1%	-	0%	97.4%	0%	97.4%	-	97.8%	94.8%	0%	96.9%	-	97.2%
Single-Unit Trucks	1	0	0	1	-	0	8	0	8	-	4	5	0	9	-	18
% Single-Unit Trucks	1.0%	0%	0%	1.0%	-	0%	2.0%	0%	2.0%	-	1.2%	3.3%	0%	1.9%	-	1.9%
Articulated Trucks	0	0	0	0	-	0	1	0	1	-	1	1	0	2	-	3
% Articulated Trucks	0%	0%	0%	0%	-	0%	0.3%	0%	0.3%	-	0.3%	0.7%	0%	0.4%	-	0.3%
Buses	0	0	0	0	-	0	0	0	0	-	0	2	0	2	-	2
% Buses	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	1.3%	0%	0.4%	-	0.2%
Bicycles on Road	0	0	0	0	-	0	0	0	0	-	1	0	0	1	-	1
% Bicycles on Road	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0.3%	0%	0%	0.2%	-	0.1%
Pedestrians	-	-	-	-	2	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-			-	0%	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021


PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902919, Location: 42.436732, -71.506894, Site Code: S21-041

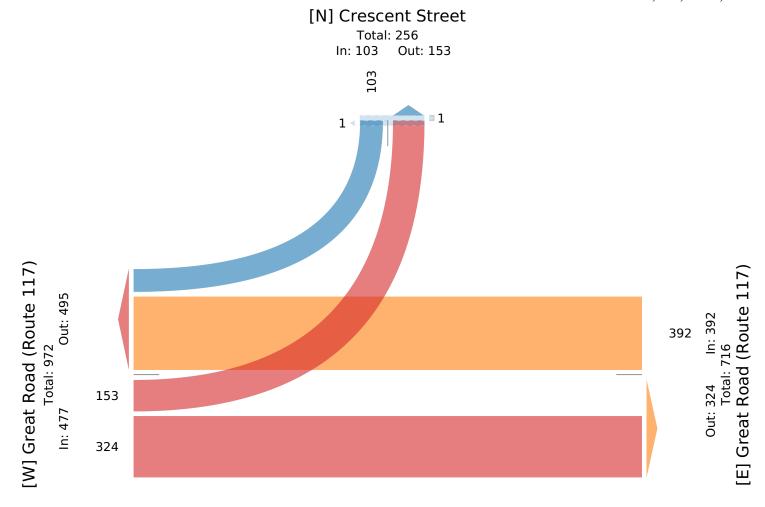

Thu Nov 18, 2021

Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Leg	C	Common I	Road				Great Roa	d (Route	62/11	7)		Great Road	l (Route 6	52/117)		
Direction	5	Southboun	ıd				Westboun	d				Eastbound					
Time		R	L	U	Арр	Ped*	R	T	U	App	Ped*	T	L	U	App	Ped*	Int
2021-11-18 7:00	AM	0	0	0	0	0	11	320	0	331	0	862	1	0	863	0	1194
8:00	AM	7	3	0	10	0	21	364	0	385	0	670	12	0	682	0	1077
9:00	AM	8	3	0	11	0	4	293	0	297	0	425	11	0	436	0	744
10:00	AM	1	0	0	1	2	7	355	0	362	0	389	3	0	392	0	755
2:00	OPM	3	2	0	5	1	15	558	0	573	0	471	3	0	474	0	1052
3:00	OPM	4	1	0	5	1	14	783	0	797	0	494	2	0	496	0	1298
4:00	OPM	0	3	0	3	1	17	856	0	873	0	582	7	0	589	0	1465
5:00	OPM	0	1	0	1	0	12	895	0	907	0	486	3	0	489	0	1397
2021-11-20 10:00	AM	0	0	0	0	0	12	445	0	457	0	470	3	0	473	0	930
11:00	AM	2	2	0	4	0	15	530	0	545	0	511	1	0	512	0	1061
12:00	OPM	0	3	0	3	0	14	523	0	537	0	522	4	0	526	0	1066
1:00	OPM	0	3	0	3	1	22	531	0	553	0	525	6	0	531	0	1087
Ţ	otal	25	21	0	46	6	164	6453	0	6617	0	6407	56	0	6463	0	13126
% Appro	oach	54.3%	45.7%	0%	-	-	2.5%	97.5%	0%	-	-	99.1%	0.9%	0%	-	-	-
% 7	otal	0.2%	0.2%	0%	0.4%	-	1.2%	49.2%	0%	50.4%	-	48.8%	0.4%	0%	49.2%	-	-
Motorcy	cles	0	0	0	0	-	0	42	0	42	-	39	0	0	39	-	81
% Motorcy	cles	0%	0%	0%	0%	-	0%	0.7%	0%	0.6%	-	0.6%	0%	0%	0.6%	-	0.6%
Li	ghts	25	20	0	45	-	157	6205	0	6362	-	6128	54	0	6182	-	12589
% Li	ghts	100%	95.2%	0%	97.8%	-	95.7%	96.2%	0%	96.1%	-	95.6%	96.4%	0%	95.7%	-	95.9%
Single-Unit Tru	ıcks	0	1	0	1	-	1	148	0	149	-	163	2	0	165	-	315
% Single-Unit Tru	ıcks	0%	4.8%	0%	2.2%	-	0.6%	2.3%	0%	2.3%	-	2.5%	3.6%	0%	2.6%	-	2.4%
Articulated Tri	ucks	0	0	0	0	-	1	37	0	38	-	46	0	0	46	-	84
% Articulated Tru	ıcks	0%	0%	0%	0%	-	0.6%	0.6%	0%	0.6%	-	0.7%	0%	0%	0.7%	-	0.6%
В	uses	0	0	0	0	-	4	15	0	19	-	26	0	0	26	-	45
% B	uses	0%	0%	0%	0%	-	2.4%	0.2%	0%	0.3%	-	0.4%	0%	0%	0.4%	-	0.3%
Bicycles on F	Road	0	0	0	0	-	1	6	0	7	-	5	0	0	5	-	12
% Bicycles on R	Road	0%	0%	0%	0%	-	0.6%	0.1%	0%	0.1%	-	0.1%	0%	0%	0.1%	-	0.1%
Pedestr	ians	-	-	-	-	6	-	-	-	-	0	-	-	-	-	0	
% Pedestr	ians	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crossy	walk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crossy	walk	-	-	-	-	0%	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021


Full Length (7 AM-11 AM, 2 PM-6 PM, 10 AM-2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

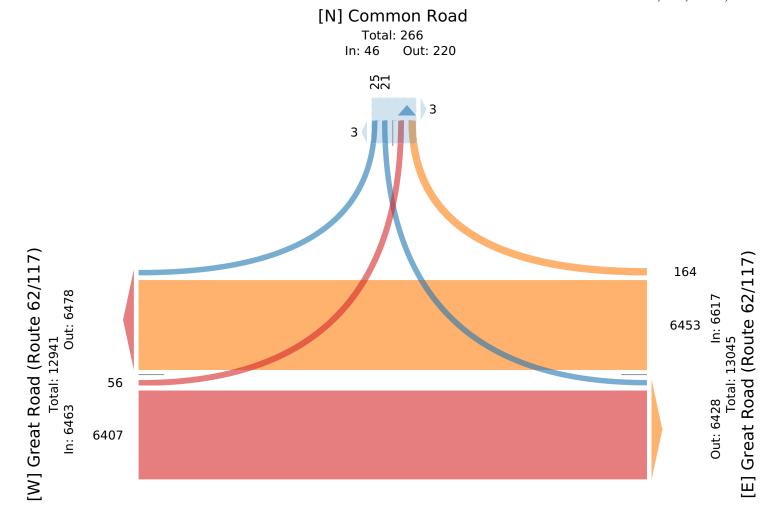

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Leg	Common Road					Great Road	(Route 62			Great Road (Route 62/117)						
Direction	South	bound				Westbound					Eastbound					
Time	R	L	U	Арр	Ped*	R	T	U	Арр	Ped*	T	L	U	App	Ped*	Int
2021-11-18 7:00AM	0	0	0	0	0	2	93	0	95	0	205	0	0	205	0	300
7:15AM	0	0	0	0	0	3	75	0	78	0	216	0	0	216	0	294
7:30AM	0	0	0	0	0	5	82	0	87	0	213	0	0	213	0	300
7:45AM	0	0	0	0	0	1	70	0	71	0	228	1	0	229	0	300
Total	0	0	0	0	0	11	320	0	331	0	862	1	0	863	0	1194
% Approach	0%	0%	0%	-	-	3.3%	96.7%	0%	-	-	99.9%	0.1%	0%	-	-	-
% Total	0%	0%	0%	0%	-	0.9%	26.8%	0%	27.7%	-	72.2%	0.1%	0%	72.3%	-	-
PHF	-	-	-	-	-	0.550	0.858	-	0.868	-	0.948	0.250	-	0.945	-	0.993
Motorcycles	0	0	0	0	-	0	3	0	3	-	3	0	0	3	-	6
% Motorcycles	0%	0%	0%	-	-	0%	0.9%	0%	0.9%	-	0.3%	0%	0%	0.3%	-	0.5%
Lights	0	0	0	0	-	8	292	0	300	-	819	1	0	820	-	1120
% Lights	0%	0%	0%	-	-	72.7%	91.3%	0%	90.6%	-	95.0%	100%	0%	95.0%	-	93.8%
Single-Unit Trucks	0	0	0	0	-	0	13	0	13	-	22	0	0	22	-	35
% Single-Unit Trucks	0%	0%	0%	-	-	0%	4.1%	0%	3.9%	-	2.6%	0%	0%	2.5%	-	2.9%
Articulated Trucks	0	0	0	0	-	1	8	0	9	-	11	0	0	11	-	20
% Articulated Trucks	0%	0%	0%	-	-	9.1%	2.5%	0%	2.7%	-	1.3%	0%	0%	1.3%	-	1.7%
Buses	0	0	0	0	-	2	3	0	5	-	6	0	0	6	-	11
% Buses	0%	0%	0%	-	-	18.2%	0.9%	0%	1.5%	-	0.7%	0%	0%	0.7%	-	0.9%
Bicycles on Road	0	0	0	0	-	0	1	0	1	-	1	0	0	1	-	2
% Bicycles on Road	0%	0%	0%	-	-	0%	0.3%	0%	0.3%	-	0.1%	0%	0%	0.1%	-	0.2%
Pedestrians	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021

AM Peak (Nov 18 2021 7AM - 8 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians, Bicycles on Road, Bicycles on Crosswalk)


All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US

[N] Common Road

Total: 12 In: 0 Out: 12

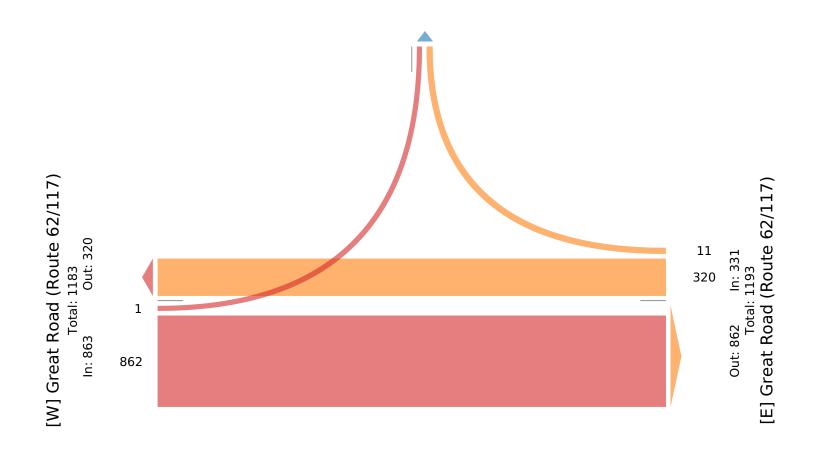

Thu Nov 18, 2021

PM Peak (Nov 18 2021 4:30PM - 5:30 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Leg	Comm	on Road				Great Roa	d (Route	62/117	')		Great Road	l (Route 6)			
Direction	Southb	oound				Westboun	d				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	Арр	Ped*	T	L	U	App	Ped*	Int
2021-11-18 4:30PM	0	0	0	0	0	3	224	0	227	0	138	1	0	139	0	366
4:45PM	0	1	0	1	0	5	227	0	232	0	160	1	0	161	0	394
5:00PM	0	0	0	0	0	5	251	0	256	0	124	1	0	125	0	381
5:15PM	0	0	0	0	0	4	234	0	238	0	131	1	0	132	0	370
Total	0	1	0	1	0	17	936	0	953	0	553	4	0	557	0	1511
% Approach	0%	100%	0%	-	-	1.8%	98.2%	0%	-	-	99.3%	0.7%	0%	-	-	-
% Total	0%	0.1%	0%	0.1%	-	1.1%	61.9%	0%	63.1%	-	36.6%	0.3%	0%	36.9%	-	-
PHF	-	0.250	-	0.250	-	0.850	0.932	-	0.931	-	0.864	1.000	-	0.865	-	0.959
Motorcycles	0	0	0	0	-	0	2	0	2	-	2	0	0	2	-	4
% Motorcycles	0%	0%	0%	0%	-	0%	0.2%	0%	0.2%	-	0.4%	0%	0%	0.4%	-	0.3%
Lights	0	1	0	1	-	17	909	0	926	-	539	4	0	543	-	1470
% Lights	0%	100%	0%	100%	-	100%	97.1%	0%	97.2%	-	97.5%	100%	0%	97.5%	-	97.3%
Single-Unit Trucks	0	0	0	0	-	0	18	0	18	-	8	0	0	8	-	26
% Single-Unit Trucks	0%	0%	0%	0%	-	0%	1.9%	0%	1.9%	-	1.4%	0%	0%	1.4%	-	1.7%
Articulated Trucks	0	0	0	0	-	0	5	0	5	-	3	0	0	3	-	8
% Articulated Trucks	0%	0%	0%	0%	-	0%	0.5%	0%	0.5%	-	0.5%	0%	0%	0.5%	-	0.5%
Buses	0	0	0	0	-	0	2	0	2	-	1	0	0	1	-	3
% Buses	0%	0%	0%	0%	-	0%	0.2%	0%	0.2%	-	0.2%	0%	0%	0.2%	-	0.2%
Bicycles on Road	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Bicycles on Road	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Pedestrians	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	_	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Thu Nov 18, 2021

PM Peak (Nov 18 2021 4:30PM - 5:30 PM) - Overall Peak Hour

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)


All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US



Total: 22 In: 1 Out: 21

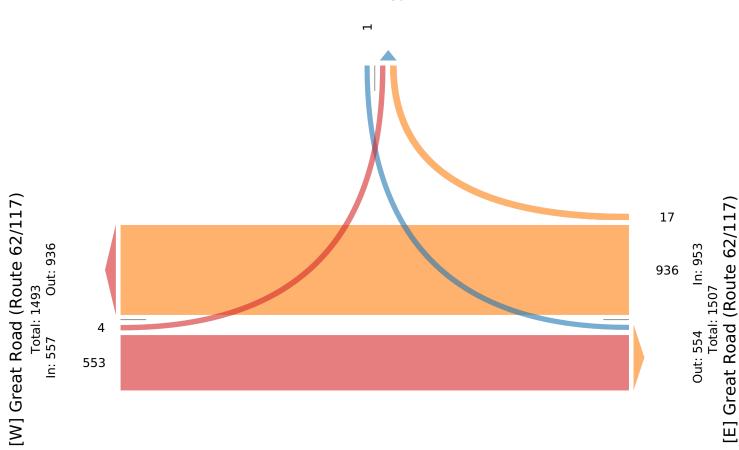

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Leg	Common Road					Great Road	(Route 62		Great Road (Route 62/117)							
Direction	South	bound	l			Westbound					Eastbound					
Time	R	L	U	App	Ped*	R	T	U	App	Ped*	T	L	U	App	Ped*	Int
2021-11-20 10:00AM	1 0	0	0	0	0	4	112	0	116	0	118	0	0	118	0	234
10:15AM	1 0	0	0	0	0	3	116	0	119	0	104	0	0	104	0	223
10:30AM	1 0	0	0	0	0	1	114	0	115	0	127	1	0	128	0	243
10:45AN	1 0	0	0	0	0	4	103	0	107	0	121	2	0	123	0	230
Tota	l 0	0	0	0	0	12	445	0	457	0	470	3	0	473	0	930
% Approach	n 0%	0%	0%	-	-	2.6%	97.4%	0%	-	-	99.4%	0.6%	0%	_	-	-
% Tota	l 0%	0%	0%	0%	-	1.3%	47.8%	0%	49.1%	-	50.5%	0.3%	0%	50.9%	-	-
PHI	-	-	-	-	-	0.750	0.957	-	0.958	-	0.925	0.375	-	0.924	-	0.956
Motorcycle	s 0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Motorcycle	s 0%	0%	0%	-	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Lights	s 0	0	0	0	-	11	430	0	441	-	465	2	0	467	-	908
% Lights	o %	0%	0%	-	-	91.7%	96.6%	0%	96.5%	-	98.9%	66.7%	0%	98.7%	-	97.6%
Single-Unit Trucks	0	0	0	0	-	1	12	0	13	-	4	1	0	5	-	18
% Single-Unit Trucks	0%	0%	0%	-	-	8.3%	2.7%	0%	2.8%	-	0.9%	33.3%	0%	1.1%	-	1.9%
Articulated Trucks	0	0	0	0	-	0	2	0	2	-	1	0	0	1	-	3
% Articulated Trucks	0%	0%	0%	-	-	0%	0.4%	0%	0.4%	-	0.2%	0%	0%	0.2%	-	0.3%
Buse	s 0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Buse	s 0%	0%	0%	-	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Bicycles on Road	i 0	0	0	0	-	0	1	0	1	-	0	0	0	0	-	1
% Bicycles on Road	i 0%	0%	0%	-	-	0%	0.2%	0%	0.2%	-	0%	0%	0%	0%	-	0.1%
Pedestrian	s -	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Bicycles on Crosswall	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswall	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

AM Peak (WKND) (Nov 20 2021 10AM - 11 AM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)


All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US

[N] Common Road

Total: 15 In: 0 Out: 15

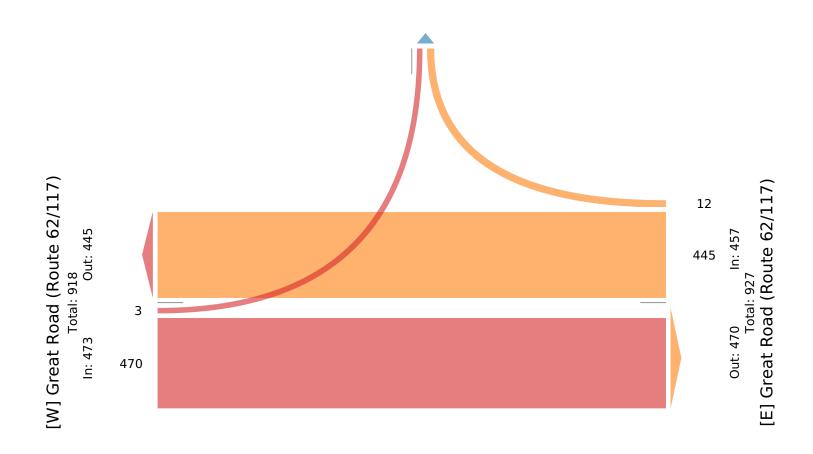

Sat Nov 20, 2021

Midday Peak (WKND), PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

 $All\ Classes\ (Motorcycles,\ Lights,\ Single-Unit\ Trucks,\ Articulated\ Trucks,\ Buses,\ Pedestrians,$

Bicycles on Road, Bicycles on Crosswalk)

All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Leg	Comm	on Road				Great Roa	d (Route	62/117	7)		Great Road)				
Direction	South	oound				Westboun	d				Eastbound					
Time	R	L	U	App	Ped*	R	T	U	App	Ped*	T	L	U	App	Ped*	Int
2021-11-20 1:00PM	0	1	0	1	0	9	127	0	136	0	138	1	0	139	0	276
1:15PM	0	1	0	1	1	1	126	0	127	0	115	1	0	116	0	244
1:30PM	0	0	0	0	0	3	140	0	143	0	128	2	0	130	0	273
1:45PM	0	1	0	1	0	9	138	0	147	0	144	2	0	146	0	294
Total	0	3	0	3	1	22	531	0	553	0	525	6	0	531	0	1087
% Approach	0%	100%	0%	-	-	4.0%	96.0%	0%	-	-	98.9%	1.1%	0%	-	-	-
% Total	0%	0.3%	0%	0.3%	-	2.0%	48.9%	0%	50.9%	-	48.3%	0.6%	0%	48.9%	-	-
PHF	-	0.750	-	0.750	-	0.611	0.946	-	0.945	-	0.911	0.750	-	0.909	-	0.927
Motorcycles	0	0	0	0	-	0	3	0	3	-	2	0	0	2	-	5
% Motorcycles	0%	0%	0%	0%	-	0%	0.6%	0%	0.5%	-	0.4%	0%	0%	0.4%	-	0.5%
Lights	0	3	0	3	-	22	518	0	540	-	517	6	0	523	-	1066
% Lights	0%	100%	0%	100%	-	100%	97.6%	0%	97.6%	-	98.5%	100%	0%	98.5%	-	98.1%
Single-Unit Trucks	0	0	0	0	-	0	9	0	9	-	5	0	0	5	-	14
% Single-Unit Trucks	0%	0%	0%	0%	-	0%	1.7%	0%	1.6%	-	1.0%	0%	0%	0.9%	-	1.3%
Articulated Trucks	0	0	0	0	-	0	0	0	0	-	0	0	0	0	-	0
% Articulated Trucks	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0%
Buses	0	0	0	0	-	0	0	0	0	-	1	0	0	1	-	1
% Buses	0%	0%	0%	0%	-	0%	0%	0%	0%	-	0.2%	0%	0%	0.2%	-	0.1%
Bicycles on Road	0	0	0	0	-	0	1	0	1	-	0	0	0	0	-	1
% Bicycles on Road	0%	0%	0%	0%	-	0%	0.2%	0%	0.2%	-	0%	0%	0%	0%	-	0.1%
Pedestrians	-	-	-	-	1	-	-	-	-	0	-	-	-	-	0	
% Pedestrians	-	-	-	-	100%	-	-	-	-	-	-	-	-	-	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	0	-	-	-	-	0	
% Bicycles on Crosswalk	-	-	-	-	0%	-	-	-	-	-	-	-	-	-	-	-

^{*}Pedestrians and Bicycles on Crosswalk. L: Left, R: Right, T: Thru, U: U-Turn

Sat Nov 20, 2021

Midday Peak (WKND), PM Peak (WKND) (Nov 20 2021 1PM - 2 PM)

All Classes (Motorcycles, Lights, Single-Unit Trucks, Articulated Trucks, Buses, Pedestrians,

Bicycles on Road, Bicycles on Crosswalk)


All Movements

ID: 902920, Location: 42.436237, -71.503126, Site Code: S21-041

Provided by: Precision Data Industries, LLC (PDI) 157 Washington Street, 2, Hudson, MA, 01749, US



Total: 31 In: 3 Out: 28

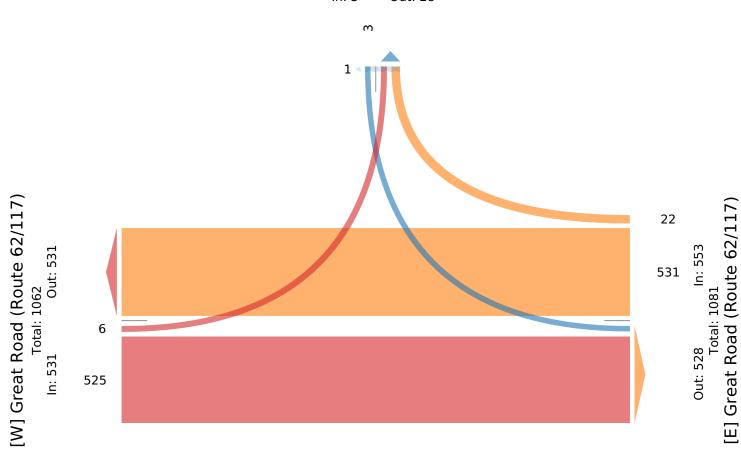

Appendix C Existing Intersection Level of Service Conditions

- 1. AM Existing Conditions
- 2. PM Existing Conditions

Part One: AM Existing Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	+	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	7	f.			ર્ન	7		4	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.995	
Flt Protected				0.950				0.992			0.985	
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	0	1782	0
Flt Permitted		0.998		0.950				0.927			0.850	
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1639	1583	0	1538	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			109						136		3	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	0	300	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	Cl+Ex	CI+Ex	CI+Ex		CI+Ex	Cl+Ex	Cl+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

	•	-	•	•	•	•	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	34.0	34.0	34.0	11.0	45.0		25.0	25.0		25.0	25.0	
Total Split (%)	48.6%	48.6%	48.6%	15.7%	64.3%		35.7%	35.7%		35.7%	35.7%	
Maximum Green (s)	29.0	29.0	29.0	6.0	40.0		20.0	20.0		20.0	20.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		27.1	27.1	6.0	38.1			20.0	31.1		20.0	
Actuated g/C Ratio		0.40	0.40	0.09	0.56			0.29	0.46		0.29	
v/c Ratio		0.91	0.06	0.78	0.28			0.30	0.24		0.66	
Control Delay		38.2	0.2	69.3	8.6			21.6	5.2		30.1	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		38.2	0.2	69.3	8.6			21.6	5.2		30.1	
LOS		D	Α	Е	Α			С	Α		С	
Approach Delay		36.2			26.3			12.3			30.1	
Approach LOS		D			С			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 70

Actuated Cycle Length: 68.2

Natural Cycle: 60


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.91 Intersection Signal Delay: 28.2 Intersection Capacity Utilization 74.1%

Intersection LOS: C ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Intersection Canacity Litilizati												

Intersection Capacity Utilization 44.5%

Analysis Period (min) 15

ICU Level of Service A

	#	-	←	€	6	</th
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	ĵ.			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utiliza	tion 63.3%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	W		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type:	Other						
Control Type: Unsignalized							

ICU Level of Service A

Analysis Period (min) 15

Intersection Capacity Utilization 26.6%

	>	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	ĵ»		¥	
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	1900	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	1900	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		12	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizat	tion 49.5%			IC	U Level o	of Service
Analysis Period (min) 15						

Part Two: PM Existing Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	*	€	+	•	•	†	<i>></i>	/	↓	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	7	f)			ર્ન	7		4	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.991	
Flt Protected		0.999		0.950				0.987			0.985	
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	0	1843	0
Flt Permitted		0.991		0.950				0.871			0.852	
Satd. Flow (perm)	0	1864	1538	1805	1832	0	0	1595	1583	0	1594	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			109		3				259		5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	72	148	16
Shared Lane Traffic (%)	•									. –		. •
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	0	236	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel		· ·	· ·							· ·	· ·	
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel		J. 1			J			J. 1 L/(J	
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases	. 91111	4	. 31111	3	8		. 3	2	30.000111	. 91111	6	

	•	-	•	•	←	•	1	†	/	-	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	34.0	34.0	34.0	11.0	45.0		25.0	25.0		25.0	25.0	
Total Split (%)	48.6%	48.6%	48.6%	15.7%	64.3%		35.7%	35.7%		35.7%	35.7%	
Maximum Green (s)	29.0	29.0	29.0	6.0	40.0		20.0	20.0		20.0	20.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		20.0	20.0	6.1	31.2			20.3	31.5		20.3	
Actuated g/C Ratio		0.32	0.32	0.10	0.51			0.33	0.51		0.33	
v/c Ratio		0.55	0.05	1.30	0.84			0.35	0.28		0.45	
Control Delay		19.9	0.2	201.6	22.1			20.4	2.7		21.4	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		19.9	0.2	201.6	22.1			20.4	2.7		21.4	
LOS		В	Α	F	С			С	Α		С	
Approach Delay		18.3			63.3			10.1			21.4	
Approach LOS		В			Е			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 70

Actuated Cycle Length: 61.6


Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.30 Intersection Signal Delay: 39.1 Intersection Capacity Utilization 84.0% Analysis Period (min) 15

Intersection LOS: D
ICU Level of Service E

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
1.1	45 70/			1/	NIII		Λ.					

Intersection Capacity Utilization 45.7%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	€.	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	CU Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1 >			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

*	→	←	*_	\	4
EBL	EBT	WBT	WBR	SEL	SER
	स्	1₃		W	
4	553	936	17	1	0
4	553	936	17	1	0
1900	1900	1900	1900	1900	1900
1.00	1.00	1.00	1.00	1.00	1.00
		0.997			
				0.950	
0	1863	1840	0	1805	0
				0.950	
0	1863	1840	0	1805	0
	30	30		30	
	581	351		666	
	13.2	8.0		15.1	
1.00	0.86	0.93	0.85	0.25	0.25
0%	2%	3%	0%	0%	0%
4	643	1006	20	4	0
0	647	1026	0	4	0
No	No	No	No	No	No
Left	Left	Left	Right	Left	Right
	0	0	•	12	
	0	0		0	
	16	16		16	
1.00	1.00	1.00	1.00	1.00	1.00
15			9	15	9
	Free	Free		Stop	
)ther					
Zu iGi					
on 60 3%			ıc	ا ا ا مرما ر	of Sarvica
011 00.0 /0			IC	O LEVEL	JI GELVICE
	4 4 1900 1.00 0 0 1.00 0% 4 0 No Left	4 553 4 553 1900 1900 1.00 1.00 0 1863 0 1863 30 581 13.2 1.00 0.86 0% 2% 4 643 0 647 No No Left Left 0 0 16	4 553 936 4 553 936 1900 1900 1900 1.00 1.00 1.00 0.997 0 1863 1840 0 1863 1840 30 30 581 351 13.2 8.0 1.00 0.86 0.93 0% 2% 3% 4 643 1006 0 647 1026 No No No No Left Left 0 0 0 16 16 1.00 1.00 1.00 15 Free Free	4 553 936 17 4 553 936 17 1900 1900 1900 1900 1.00 1.00 1.00 1.00 0.997 0 1863 1840 0 0 1863 1840 0 30 30 30 581 351 13.2 8.0 1.00 0.86 0.93 0.85 0% 2% 3% 0% 4 643 1006 20 0 647 1026 0 No No No No No Left Left Left Right 0 0 0 0 16 16 1.00 1.00 1.00 1.00 15 9 Free Free	4 553 936 17 1 1900 1900 1900 1900 1900 1.00 1.00 1.00 1.00 1.00 0.997 0.950 0 1863 1840 0 1805 0.950 0 1863 1840 0 1805 30 30 30 30 581 351 666 13.2 8.0 15.1 1.00 0.86 0.93 0.85 0.25 0% 2% 3% 0% 0% 4 643 1006 20 4 0 647 1026 0 4 No No No No No No No Left Left Left Right Left 0 0 4 No No No No No No No No Left Left Left Right Left 1.00 1.00 1.00 1.00 15 Free Free Stop

Appendix D

Intersection Level of Service: Proposed Conditions

- 1. AM Add Permissive Left Turn Conditions
- 2. PM Add Permissive Left Turn Conditions
- 3. AM Turn Common Road into One-Way Street Conditions
- 4. PM Turn Common Road into One-Way Street Conditions
- 5. AM Add Permissive Left Turn and Turn Common Road into One-Way Street Conditions
- 6. PM Add Permissive Left Turn and Turn Common Road into One-Way Street Conditions
- 7. AM Optimized Existing Intersection with Pedestrian Phase Conditions
- 8. PM Optimized Existing Intersection with Pedestrian Phase Conditions
 - 9. AM Add Permissive Left Turn with Pedestrian Phase Conditions
 - 10.PM Add Permissive Left Turn with Pedestrian Phase Conditions
- 11.AM Turn Common Road into One-Way Street with Pedestrian Phase Conditions
- 12.PM Turn Common Road into One-Way Street with Pedestrian Phase Conditions
- 13.AM Add Permissive Left Turn and Turn Common Road into One-Way Street with Pedestrian Phase Conditions
- 14. PM Add Permissive Left Turn and Turn Common Road into One-Way
 Street with Pedestrian Phase Conditions

Part One: AM Add Permissive Left Turn Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	+	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	ř	f)			ર્ન	7	7	f)	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.991	
Flt Protected				0.950				0.992		0.950		
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	1736	1798	0
Flt Permitted		0.998		0.950				0.917		0.664		
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1621	1583	1213	1798	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			127						161		5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)	-									<u> </u>		
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	92	208	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	<u> </u>		12			12	<u> </u>		12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2	-	1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	CI+Ex	CI+Ex	Cl+Ex		CI+Ex	CI+Ex	CI+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel	O	O	0. 2 /.	O	0. 1		O	O	O	O	O	
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)	0.0	94	0.0	0.0	94		0.0	94	0.0	0.0	94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			CI+Ex			CI+Ex	
Detector 2 Channel		31 · LX			51. LX			JI. LA			JI- LA	
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases	. 01111	4	1 01111	3	8		. 01111	2	Judioiii	· Oilli	6	
0.00.00 1 110000		7		J	U			_			U	

	۶	-	•	•	•	•	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	32.0	32.0	32.0	11.0	43.0		17.0	17.0		17.0	17.0	
Total Split (%)	53.3%	53.3%	53.3%	18.3%	71.7%		28.3%	28.3%		28.3%	28.3%	
Maximum Green (s)	27.0	27.0	27.0	6.0	38.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		23.9	23.9	6.0	35.0			12.1	23.1	12.1	12.1	
Actuated g/C Ratio		0.42	0.42	0.11	0.61			0.21	0.40	0.21	0.21	
v/c Ratio		0.86	0.05	0.65	0.25			0.43	0.26	0.36	0.54	
Control Delay		28.6	0.2	47.2	5.6			25.3	4.7	25.4	26.8	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		28.6	0.2	47.2	5.6			25.3	4.7	25.4	26.8	
LOS		С	Α	D	Α			С	Α	С	С	
Approach Delay		27.1			17.7			13.6			26.3	
Approach LOS		С			В			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 60

Actuated Cycle Length: 57.1

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.86 Intersection Signal Delay: 22.2 Intersection Capacity Utilization 70.8%

Intersection LOS: C
ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Intersection Canacity Litilizati												

Intersection Capacity Utilization 44.5%

Analysis Period (min) 15

ICU Level of Service A

	#	-	←	€	6	</th
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	ĵ.			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utiliza	tion 63.3%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type: (Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level o	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	^		W	
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	1900	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	1900	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	•	12	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 49 5%			IC	ULevel	of Service
Analysis Period (min) 15					2 20.01	

Part Two: PM Add Permissive Left Turn Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	+	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	7	f)			ર્ન	7	7	ĵ.	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.985	
Flt Protected		0.999		0.950				0.987		0.950		
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	1805	1855	0
Flt Permitted		0.988		0.950				0.872		0.641		
Satd. Flow (perm)	0	1859	1538	1805	1832	0	0	1596	1583	1218	1855	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			139		4				259		9	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	72	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	72	164	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			12			12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		CI+Ex			CI+Ex			CI+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

	•	-	•	•	•	*	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	22.0	22.0	22.0	16.0	38.0		17.0	17.0		17.0	17.0	
Total Split (%)	40.0%	40.0%	40.0%	29.1%	69.1%		30.9%	30.9%		30.9%	30.9%	
Maximum Green (s)	17.0	17.0	17.0	11.0	33.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		13.5	13.5	10.0	28.5			12.1	27.1	12.1	12.1	
Actuated g/C Ratio		0.27	0.27	0.20	0.56			0.24	0.53	0.24	0.24	
v/c Ratio		0.67	0.06	0.65	0.76			0.48	0.27	0.25	0.37	
Control Delay		24.0	0.2	30.0	13.9			23.2	2.0	20.1	19.5	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		24.0	0.2	30.0	13.9			23.2	2.0	20.1	19.5	
LOS		С	Α	С	В			С	Α	С	В	
Approach Delay		22.0			17.6			10.8			19.7	
Approach LOS		С			В			В			В	

Intersection Summary

Area Type: Other

Cycle Length: 55

Actuated Cycle Length: 50.7

Natural Cycle: 55


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.76 Intersection Signal Delay: 17.1 Intersection Capacity Utilization 85.2%

Intersection LOS: B
ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	*	•	←	4	4	†	~	/		4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Interception Consoity Litilizati	ion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	€.	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	CU Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1 >			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

*	→	←	*_	\	4
EBL	EBT	WBT	WBR	SEL	SER
	स्	1₃		W	
4	553	936	17	1	0
4	553	936	17	1	0
1900	1900	1900	1900	1900	1900
1.00	1.00	1.00	1.00	1.00	1.00
		0.997			
				0.950	
0	1863	1840	0	1805	0
				0.950	
0	1863	1840	0	1805	0
	30	30		30	
	581	351		666	
	13.2	8.0		15.1	
1.00	0.86	0.93	0.85	0.25	0.25
0%	2%	3%	0%	0%	0%
4	643	1006	20	4	0
0	647	1026	0	4	0
No	No	No	No	No	No
Left	Left	Left	Right	Left	Right
	0	0	•	12	
	0	0		0	
	16	16		16	
1.00	1.00	1.00	1.00	1.00	1.00
15			9	15	9
	Free	Free		Stop	
)ther					
Zu iGi					
on 60 3%			ıc	ا ا ا مرما ر	of Sarvica
011 00.0 /0			IC	O LEVEL	JI GELVICE
	4 4 1900 1.00 0 0 1.00 0% 4 0 No Left	4 553 4 553 1900 1900 1.00 1.00 0 1863 0 1863 30 581 13.2 1.00 0.86 0% 2% 4 643 0 647 No No Left Left 0 0 16	4 553 936 4 553 936 1900 1900 1900 1.00 1.00 1.00 0.997 0 1863 1840 0 1863 1840 30 30 581 351 13.2 8.0 1.00 0.86 0.93 0% 2% 3% 4 643 1006 0 647 1026 No No No No Left Left 0 0 0 16 16 1.00 1.00 1.00 15 Free Free	4 553 936 17 4 553 936 17 1900 1900 1900 1900 1.00 1.00 1.00 1.00 0.997 0 1863 1840 0 0 1863 1840 0 30 30 30 581 351 13.2 8.0 1.00 0.86 0.93 0.85 0% 2% 3% 0% 4 643 1006 20 0 647 1026 0 No No No No No Left Left Left Right 0 0 0 0 16 16 1.00 1.00 1.00 1.00 15 9 Free Free	4 553 936 17 1 1900 1900 1900 1900 1900 1.00 1.00 1.00 1.00 1.00 0.997 0.950 0 1863 1840 0 1805 0.950 0 1863 1840 0 1805 30 30 30 30 581 351 666 13.2 8.0 15.1 1.00 0.86 0.93 0.85 0.25 0% 2% 3% 0% 0% 4 643 1006 20 4 0 647 1026 0 4 No No No No No No No Left Left Left Right Left 0 0 4 No No No No No No No No Left Left Left Right Left 1.00 1.00 1.00 1.00 15 Free Free Stop



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	/	/	↓	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	7	f)			ર્ન	7		4	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.995	
Flt Protected				0.950				0.992			0.985	
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	0	1782	0
Flt Permitted		0.998		0.950				0.916			0.843	
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1619	1583	0	1525	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			127						138		3	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	0	300	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			0	, i		0	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	Cl+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			CI+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm	NA	custom	Perm	NA	
Protected Phases		4		3	8			2			6	

	•	-	•	•	←	•	4	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	30.0	30.0	30.0	11.0	41.0		19.0	19.0		19.0	19.0	
Total Split (%)	50.0%	50.0%	50.0%	18.3%	68.3%		31.7%	31.7%		31.7%	31.7%	
Maximum Green (s)	25.0	25.0	25.0	6.0	36.0		14.0	14.0		14.0	14.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		23.6	23.6	6.0	34.6			14.0	25.1		14.0	
Actuated g/C Ratio		0.40	0.40	0.10	0.59			0.24	0.43		0.24	
v/c Ratio		0.90	0.05	0.67	0.26			0.38	0.26		0.82	
Control Delay		34.3	0.2	49.2	6.6			22.8	5.1		42.8	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		34.3	0.2	49.2	6.6			22.8	5.1		42.8	
LOS		С	Α	D	Α			С	Α		D	
Approach Delay		32.6			18.9			12.7			42.8	
Approach LOS		С			В			В			D	

Intersection Summary

Area Type: Other

Cycle Length: 60

Actuated Cycle Length: 58.7

Natural Cycle: 60


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.90 Intersection Signal Delay: 27.3 Intersection Capacity Utilization 74.1%

Intersection LOS: C
ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Intersection Canacity Litilizati	•											

Intersection Capacity Utilization 44.5%

Analysis Period (min) 15

ICU Level of Service A

	#	-	←	€	6	</th
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	ĵ.			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utiliza	tion 63.3%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	W		1>			ર્ન	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
7 I	Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level of	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	^			
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	<u> </u>	0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 49 5%			IC	ULevelo	of Service
Analysis Period (min) 15				,,,	2 20.0.0	

Part Four: PM Turn Common Road into One-Way Street Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	+	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	ň	f)			ર્ન	7		4	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.991	
Flt Protected		0.999		0.950				0.987			0.985	
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	0	1843	0
Flt Permitted		0.988		0.950				0.882			0.838	
Satd. Flow (perm)	0	1859	1538	1805	1832	0	0	1615	1583	0	1568	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			139		4				229		6	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	73	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	0	237	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			0			0	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		CI+Ex			Cl+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

	•	-	•	•	•	*	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	20.0	20.0	20.0	16.0	36.0		19.0	19.0		19.0	19.0	
Total Split (%)	36.4%	36.4%	36.4%	29.1%	65.5%		34.5%	34.5%		34.5%	34.5%	
Maximum Green (s)	15.0	15.0	15.0	11.0	31.0		14.0	14.0		14.0	14.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		13.0	13.0	10.0	28.1			14.1	29.1		14.1	
Actuated g/C Ratio		0.25	0.25	0.19	0.54			0.27	0.56		0.27	
v/c Ratio		0.71	0.06	0.67	0.79			0.42	0.26		0.56	
Control Delay		27.8	0.2	31.3	16.9			20.5	2.3		22.9	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		27.8	0.2	31.3	16.9			20.5	2.3		22.9	
LOS		С	Α	С	В			С	Α		С	
Approach Delay		25.5			20.2			9.9			22.9	
Approach LOS		С			С			Α			С	

Intersection Summary

Area Type: Other

Cycle Length: 55

Actuated Cycle Length: 52.2

Natural Cycle: 55


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.79 Intersection Signal Delay: 19.2 Intersection Capacity Utilization 84.1%

Intersection LOS: B
ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
1.1	45 70/			1/	NIII		Λ.					

Intersection Capacity Utilization 45.7%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	€.	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	CU Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1 >			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

	>	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	ĵ.			
Traffic Volume (vph)	4	553	936	17	0	0
Future Volume (vph)	4	553	936	17	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected						
Satd. Flow (prot)	0	1863	1840	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1863	1840	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizat	tion 53.6%			IC	U Level o	of Service
Analysis Period (min) 15						

Part Five: AM Add Permissive Left Turn and Turn Common Road into One-Way Street Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	+	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	ř	ĵ.			ર્ન	7	7	f)	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.991	
Flt Protected				0.950				0.992		0.950		
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	1736	1798	0
Flt Permitted		0.998		0.950				0.917		0.664		
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1621	1583	1213	1798	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			127						161		5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)	-									<u> </u>		
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	92	208	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	<u> </u>		12			12	<u> </u>		12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2	-	1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	CI+Ex	CI+Ex	Cl+Ex		CI+Ex	CI+Ex	CI+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel	O	O	0. 2 /.	O	0. 1		O	O	0. 1	O	O	
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)	0.0	94	0.0	0.0	94		0.0	94	0.0	0.0	94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			CI+Ex			CI+Ex	
Detector 2 Channel		31 · LX			51. LX			JI. LA			JI- LA	
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases	. 01111	4	1 01111	3	8		. 01111	2	Judioiii	· Oilli	6	
0.00.00 1 110000		7		J	U			_			U	

	۶	-	•	•	•	•	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	32.0	32.0	32.0	11.0	43.0		17.0	17.0		17.0	17.0	
Total Split (%)	53.3%	53.3%	53.3%	18.3%	71.7%		28.3%	28.3%		28.3%	28.3%	
Maximum Green (s)	27.0	27.0	27.0	6.0	38.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		23.9	23.9	6.0	35.0			12.1	23.1	12.1	12.1	
Actuated g/C Ratio		0.42	0.42	0.11	0.61			0.21	0.40	0.21	0.21	
v/c Ratio		0.86	0.05	0.65	0.25			0.43	0.26	0.36	0.54	
Control Delay		28.6	0.2	47.2	5.6			25.3	4.7	25.4	26.8	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		28.6	0.2	47.2	5.6			25.3	4.7	25.4	26.8	
LOS		С	Α	D	Α			С	Α	С	С	
Approach Delay		27.1			17.7			13.6			26.3	
Approach LOS		С			В			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 60

Actuated Cycle Length: 57.1

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.86 Intersection Signal Delay: 22.2 Intersection Capacity Utilization 70.8%

Intersection LOS: C
ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Intersection Canacity Litilizati												

Intersection Capacity Utilization 44.5%

Analysis Period (min) 15

ICU Level of Service A

	#	-	←	€	6	</th
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	ĵ.			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utiliza	tion 63.3%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	W		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type:	Other						
Control Type: Unsignalized							

ICU Level of Service A

Analysis Period (min) 15

Intersection Capacity Utilization 26.6%

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	^			
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	•	0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 49.5%			IC	U Level o	of Service
Analysis Period (min) 15				,,,	2 20.010	

Part Six: PM Add Permissive Left Turn and Turn Common Road into One-Way Street Conditions



	۶	→	•	•	←	•	•	†	<i>></i>	/	+	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	7	f)			ર્ન	7	ň	f)	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.985	
Flt Protected		0.999		0.950				0.987		0.950		
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	1805	1855	0
Flt Permitted		0.988		0.950				0.872		0.641		
Satd. Flow (perm)	0	1859	1538	1805	1832	0	0	1596	1583	1218	1855	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			139		4				259		9	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	73	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	73	164	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			12	, i		12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	Cl+Ex	CI+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

	•	-	•	•	•	*	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	22.0	22.0	22.0	16.0	38.0		17.0	17.0		17.0	17.0	
Total Split (%)	40.0%	40.0%	40.0%	29.1%	69.1%		30.9%	30.9%		30.9%	30.9%	
Maximum Green (s)	17.0	17.0	17.0	11.0	33.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		13.5	13.5	10.0	28.5			12.1	27.1	12.1	12.1	
Actuated g/C Ratio		0.27	0.27	0.20	0.56			0.24	0.53	0.24	0.24	
v/c Ratio		0.67	0.06	0.65	0.76			0.48	0.27	0.25	0.37	
Control Delay		24.0	0.2	30.0	13.9			23.2	2.0	20.1	19.5	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		24.0	0.2	30.0	13.9			23.2	2.0	20.1	19.5	
LOS		С	Α	С	В			С	Α	С	В	
Approach Delay		22.0			17.6			10.8			19.7	
Approach LOS		С			В			В			В	

Intersection Summary

Area Type: Other

Cycle Length: 55

Actuated Cycle Length: 50.7

Natural Cycle: 55


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.76 Intersection Signal Delay: 17.1 Intersection Capacity Utilization 85.2%

Intersection LOS: B
ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	*	•	←	4	4	†	~	/		4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
Interception Consoity Litilizati	ion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	€.	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	CU Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1 >			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

	>	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	₽			
Traffic Volume (vph)	4	553	936	17	0	0
Future Volume (vph)	4	553	936	17	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected						
Satd. Flow (prot)	0	1863	1840	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1863	1840	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	· ·
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
	Othor					
	Julei					
	ion 52 60/			IC	III ovol o	of Convice
	1011 00.0%			IC	O Level (i service
Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft) Two way Left Turn Lane Headway Factor Turning Speed (mph) Sign Control Intersection Summary	1.00 15 Other	Left 0 0 16	Left 0 0 16	1.00 9	Left 0 0 16 1.00 15 Stop	Right

Part Seven: AM Optimized Existing Intersection with Pedestrian Phase Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	۶	→	•	•	←	•	•	†	<i>></i>	/	↓	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	ሻ	f)			ર્ન	7		4	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.995	
Flt Protected				0.950				0.992			0.985	
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	0	1782	0
Flt Permitted		0.998		0.950				0.926			0.850	
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1637	1583	0	1538	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			91						194		2	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	0	300	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	, ,		12	, i		0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			CI+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm	NA	custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9

	۶	-	•	•	←	•	4	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	47.0	47.0	47.0	13.0	60.0		31.0	31.0		31.0	31.0	
Total Split (%)	39.2%	39.2%	39.2%	10.8%	50.0%		25.8%	25.8%		25.8%	25.8%	
Maximum Green (s)	42.0	42.0	42.0	8.0	55.0		26.0	26.0		26.0	26.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		42.0	42.0	8.0	55.0			26.0	39.0		26.0	
Actuated g/C Ratio		0.46	0.46	0.09	0.60			0.29	0.43		0.29	
v/c Ratio		0.78	0.05	0.78	0.26			0.31	0.25		0.68	
Control Delay		28.8	0.1	76.6	9.2			27.8	3.3		37.8	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		28.8	0.1	76.6	9.2			27.8	3.3		37.8	
LOS		С	Α	Е	Α			С	Α		D	
Approach Delay		27.3			28.8			13.8			37.8	
Approach LOS		С			С			В			D	

Intersection Summary

Area Type: Other

Cycle Length: 120
Actuated Cycle Length: 91
Natural Cycle: 120


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.78
Intersection Signal Delay: 26.8
Intersection Capacity Utilization 74.1%

Intersection LOS: C
ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

Lane Group Ø9 Permitted Phases Detector Phase Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Detector Phase Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Total Split (s) 29.0 Total Split (%) 24%
Total Split (%) 24%
Mar 1 (a)
Maximum Green (s) 26.0
Yellow Time (s) 2.0
All-Red Time (s) 1.0
Lost Time Adjust (s)
Total Lost Time (s)
Lead/Lag
Lead-Lag Optimize?
Vehicle Extension (s) 3.0
Recall Mode None
Act Effct Green (s)
Actuated g/C Ratio
v/c Ratio
Control Delay
Queue Delay
Total Delay
LOS
Approach LOS
Approach LOS
Intersection Summary

6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
1.1	44 50/			1/	NIII		Λ.					

Intersection Capacity Utilization 44.5%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	٤	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized	51101					
Intersection Capacity Utilizat	ion 63.3%			IC	III evel	of Service
Analysis Period (min) 15				10	2 20101	J. 501 1100

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type: (Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level o	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	>	→	←	*_	\	4	
Lane Group	EBL	EBT	WBT	WBR	SEL	SER	
Lane Configurations		4	ĵ»		¥		
Traffic Volume (vph)	1	862	320	11	0	0	
Future Volume (vph)	1	862	320	11	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt			0.993				
Flt Protected							
Satd. Flow (prot)	0	1827	1731	0	1900	0	
Flt Permitted							
Satd. Flow (perm)	0	1827	1731	0	1900	0	
Link Speed (mph)		30	30		30		
Link Distance (ft)		581	351		666		
Travel Time (s)		13.2	8.0		15.1		
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25	
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%	
Adj. Flow (vph)	4	907	372	20	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	0	911	392	0	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Left	Left	Right	Left	Right	
Median Width(ft)		0	0		12		
Link Offset(ft)		0	0		0		
Crosswalk Width(ft)		16	16		16		
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15			9	15	9	
Sign Control		Free	Free		Stop		
Intersection Summary							
Area Type:	Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 49.5%			IC	U Level o	of Service	e A
Analysis Period (min) 15							

Part Eight: PM Optimized Existing Intersection with Pedestrian Phase Conditions



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

	ᄼ	→	•	•	←	•	•	†	~	/	ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	ħ	f)			ર્ન	7		4	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.991	
Flt Protected		0.999		0.950				0.987			0.985	
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	0	1843	0
Flt Permitted		0.991		0.950				0.883			0.844	
Satd. Flow (perm)	0	1864	1538	1805	1832	0	0	1617	1583	0	1579	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121		2				259		4	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	72	148	16
Shared Lane Traffic (%)	•	020		202	700		10	100	200		1 10	10
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	0	236	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	2010	12	, tigin	LOIL	12	i tigiit	20.0	0	rugiic	20.0	0	, agait
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane		10			10			10			10	
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	1.00	9	15	1.00	9	15	1.00	9	15	1.00	9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	Cl+Ex	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel	OI · LX	OITEX	OI LX	OI LX	OI · LX		OI · LX	OI LX	OI · LX	OI · LX	OI · LX	
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)	0.0	94	0.0	0.0	94		0.0	94	0.0	0.0	94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel		OITEX			OI. LX			OITEX			OI. LX	
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases	I GIIII	4	I GIIII	3	1NA 8		i C illi	2	CuStOIII	I CIIII	6	
1 10100100 F110303		4			0			2			U	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9
—	

	۶	→	•	•	←	•	4	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	26.0	26.0	26.0	13.0	39.0		22.0	22.0		22.0	22.0	
Total Split (%)	28.9%	28.9%	28.9%	14.4%	43.3%		24.4%	24.4%		24.4%	24.4%	
Maximum Green (s)	21.0	21.0	21.0	8.0	34.0		17.0	17.0		17.0	17.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		21.0	21.0	8.0	34.0			17.0	30.0		17.0	
Actuated g/C Ratio		0.34	0.34	0.13	0.56			0.28	0.49		0.28	
v/c Ratio		0.51	0.05	0.98	0.76			0.41	0.28		0.53	
Control Delay		19.4	0.1	86.4	16.8			21.3	2.3		23.6	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		19.4	0.1	86.4	16.8			21.3	2.3		23.6	
LOS		В	Α	F	В			С	Α		С	
Approach Delay		17.8			32.8			10.2			23.6	
Approach LOS		В			С			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 90 Actuated Cycle Length: 61

Natural Cycle: 90


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.98 Intersection Signal Delay: 24.2 Intersection Capacity Utilization 84.0%

Intersection LOS: C
ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lanes, Volumes, Timings 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)

Lane Group	Ø9	
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	26.0	
Minimum Split (s)	29.0	
Total Split (s)	29.0	
Total Split (%)	32%	
Maximum Green (s)	26.0	
Yellow Time (s)	2.0	
All-Red Time (s)	1.0	
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	
Recall Mode	None	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Intersection Summary		
microodion cannady		

6: Library Hill Road/Hartley Road & Crescent Street

	٠	→	•	•	—	4	1	†	/	/	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
Area Type:	Other											
Control Type: Unsignalized												
Interception Conneity Litilize	tion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7% ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	۲	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type: C	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	<i>></i>	>	↓	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		ĵ»			4	
Traffic Volume (vph)	25	24	110	0	0	173	
Future Volume (vph)	25	24	110	0	0	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.934						
Flt Protected	0.975						
Satd. Flow (prot)	1696	0	1863	0	0	1863	
Flt Permitted	0.975						
Satd. Flow (perm)	1696	0	1863	0	0	1863	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	27	26	120	0	0	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	53	0	120	0	0	188	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
3 1	Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	ion 19.1%			IC	U Level o	of Service	A (

Intersection Capacity Utilization 19.1% Analysis Period (min) 15

	>	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	1>		**	
Traffic Volume (vph)	4	553	936	17	1	0
Future Volume (vph)	4	553	936	17	1	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected					0.950	
Satd. Flow (prot)	0	1863	1840	0	1805	0
Flt Permitted					0.950	
Satd. Flow (perm)	0	1863	1840	0	1805	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	4	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	4	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		12	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized	o.					
Intersection Capacity Utilizat	tion 60 3%			IC	CU Level o	of Service
Analysis Period (min) 15					2 20101	

Part Nine: AM Add Permissive Left Turn with Pedestrian Phase Conditions



	•	→	*	€	+	•	•	†	<i>></i>	/	↓	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	ሻ	f)			ર્ની	7	ሻ	ĵ»	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.991	
Flt Protected				0.950				0.992		0.950		
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	1736	1798	0
Flt Permitted		0.998		0.950				0.916		0.664		
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1619	1583	1213	1798	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121						194		3	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	92	208	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12	J		12	, i		12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			CI+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9

	•	-	•	•	←	•	4	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	33.0	33.0	33.0	11.0	44.0		17.0	17.0		17.0	17.0	
Total Split (%)	36.7%	36.7%	36.7%	12.2%	48.9%		18.9%	18.9%		18.9%	18.9%	
Maximum Green (s)	28.0	28.0	28.0	6.0	39.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		28.0	28.0	6.0	39.0			12.0	23.0	12.0	12.0	
Actuated g/C Ratio		0.46	0.46	0.10	0.64			0.20	0.38	0.20	0.20	
v/c Ratio		0.79	0.05	0.70	0.24			0.46	0.27	0.39	0.58	
Control Delay		22.8	0.1	52.8	5.4			27.1	3.5	26.9	29.5	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		22.8	0.1	52.8	5.4			27.1	3.5	26.9	29.5	
LOS		С	Α	D	Α			С	Α	С	С	
Approach Delay		21.6			19.2			13.6			28.7	
Approach LOS		С			В			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 90

Actuated Cycle Length: 61

Natural Cycle: 90


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.79 Intersection Signal Delay: 20.7 Intersection Capacity Utilization 70.8%

Intersection LOS: C
ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lane Group	Ø9	
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	26.0	
Minimum Split (s)	29.0	
Total Split (s)	29.0	
Total Split (%)	32%	
Maximum Green (s)	26.0	
Yellow Time (s)	2.0	
All-Red Time (s)	1.0	
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	
Recall Mode	None	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Intersection Summary		
microodion carrinally		

6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
The form of the form of the first of	44 50/			1/	NIII		Λ.					

Intersection Capacity Utilization 44.5%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	٤	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized	51101					
Intersection Capacity Utilizat	ion 63.3%			IC	III evel	of Service
Analysis Period (min) 15				10	2 20101	J. 501 1100

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type: (Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level o	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	>	→	←	*_	\	4	
Lane Group	EBL	EBT	WBT	WBR	SEL	SER	
Lane Configurations		4	ĵ»		W		
Traffic Volume (vph)	1	862	320	11	0	0	
Future Volume (vph)	1	862	320	11	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt			0.993				
Flt Protected							
Satd. Flow (prot)	0	1827	1731	0	1900	0	
Flt Permitted							
Satd. Flow (perm)	0	1827	1731	0	1900	0	
Link Speed (mph)		30	30		30		
Link Distance (ft)		581	351		666		
Travel Time (s)		13.2	8.0		15.1		
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25	
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%	
Adj. Flow (vph)	4	907	372	20	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	0	911	392	0	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Left	Left	Right	Left	Right	
Median Width(ft)		0	0		12	_	
Link Offset(ft)		0	0		0		
Crosswalk Width(ft)		16	16		16		
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15			9	15	9	
Sign Control		Free	Free		Stop		
Intersection Summary							
Area Type:	Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 49.5%			IC	U Level o	of Service	e A
Analysis Period (min) 15							

Part Ten: PM Add Permissive Left Turn with Pedestrian Phase Conditions



	۶	→	•	•	←	•	•	†	<i>></i>	/	+	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	ň	f)			ર્ન	7	ň	f)	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	64	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.985	
Flt Protected		0.999		0.950				0.987		0.950		
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	1805	1855	0
Flt Permitted		0.991		0.950				0.870		0.620		
Satd. Flow (perm)	0	1864	1538	1805	1832	0	0	1593	1583	1178	1855	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121		2				259		5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	72	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	72	164	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			12			12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		CI+Ex			CI+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group Ø9 Lane Configurations Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphp) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (prot) Fit Permitted Satd. Flow (prm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft) Link Offset(ft) Crosswalk Width(ft) Link Offset(ft) Crosswalk Width(ft)	Lane Configurations	
Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ff) Crosswalk Width(ft)		
Future Volume (vphp) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ff) Crosswalk Width(ft)	Traffic Volume (vph)	
Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Filt Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Storage Lanes Taper Length (ft) Lane Util. Factor Frt Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)	. ,	
Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Offset(ft) Crosswalk Width(ft)		
Crosswalk Width(ft)		
	. ,	
Two way Left Turn Lane		
Headway Factor Turning Speed (mph)		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft) Todiling Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type	T T	
Protected Phases 9		-

	•	→	•	•	←	•	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	27.0	27.0	27.0	16.0	43.0		18.0	18.0		18.0	18.0	
Total Split (%)	30.0%	30.0%	30.0%	17.8%	47.8%		20.0%	20.0%		20.0%	20.0%	
Maximum Green (s)	22.0	22.0	22.0	11.0	38.0		13.0	13.0		13.0	13.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		21.8	21.8	11.0	37.8			13.0	29.0	13.0	13.0	
Actuated g/C Ratio		0.36	0.36	0.18	0.62			0.21	0.48	0.21	0.21	
v/c Ratio		0.49	0.05	0.71	0.68			0.54	0.29	0.29	0.41	
Control Delay		18.3	0.1	38.0	11.5			28.1	2.4	23.8	23.7	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		18.3	0.1	38.0	11.5			28.1	2.4	23.8	23.7	
LOS		В	Α	D	В			С	Α	С	С	
Approach Delay		16.8			17.6			13.1			23.7	
Approach LOS		В			В			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 90

Actuated Cycle Length: 60.8

Natural Cycle: 90


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.71 Intersection Signal Delay: 17.2 Intersection Capacity Utilization 85.2%

Intersection LOS: B ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lane Group	Ø9	
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	26.0	
Minimum Split (s)	29.0	
Total Split (s)	29.0	
Total Split (%)	32%	
Maximum Green (s)	26.0	
Yellow Time (s)	2.0	
All-Red Time (s)	1.0	
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	
Recall Mode	None	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Intersection Summary		
microodion carrinally		

6: Library Hill Road/Hartley Road & Crescent Street

	٠	→	•	•	—	4	1	†	/	/	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
Area Type:	Other											
Control Type: Unsignalized												
Interception Conneity Litilize	tion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7% ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	۲	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type: C	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1>			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

	>	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	ĵ.		N/	
Traffic Volume (vph)	4	553	936	17	1	0
Future Volume (vph)	4	553	936	17	1	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected					0.950	
Satd. Flow (prot)	0	1863	1840	0	1805	0
Flt Permitted					0.950	
Satd. Flow (perm)	0	1863	1840	0	1805	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	4	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	4	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	_	12	_
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizat	tion 60.3%			IC	CU Level	of Service
Analysis Period (min) 15						

Part Eleven: AM Turn Common Road into One-Way Street with Pedestrian Phase Conditions



	۶	→	•	•	←	•	•	†	<i>></i>	/	↓	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	ሻ	f)			ર્ન	7		4	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.995	
Flt Protected				0.950				0.992			0.985	
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	0	1782	0
Flt Permitted		0.998		0.950				0.926			0.850	
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1637	1583	0	1538	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			91						194		2	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	0	300	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	, ,		12	, i		0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			CI+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm	NA	custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9

	۶	-	•	•	←	•	4	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	47.0	47.0	47.0	13.0	60.0		31.0	31.0		31.0	31.0	
Total Split (%)	39.2%	39.2%	39.2%	10.8%	50.0%		25.8%	25.8%		25.8%	25.8%	
Maximum Green (s)	42.0	42.0	42.0	8.0	55.0		26.0	26.0		26.0	26.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		42.0	42.0	8.0	55.0			26.0	39.0		26.0	
Actuated g/C Ratio		0.46	0.46	0.09	0.60			0.29	0.43		0.29	
v/c Ratio		0.78	0.05	0.78	0.26			0.31	0.25		0.68	
Control Delay		28.8	0.1	76.6	9.2			27.8	3.3		37.8	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		28.8	0.1	76.6	9.2			27.8	3.3		37.8	
LOS		С	Α	Е	Α			С	Α		D	
Approach Delay		27.3			28.8			13.8			37.8	
Approach LOS		С			С			В			D	

Intersection Summary

Area Type: Other

Cycle Length: 120
Actuated Cycle Length: 91
Natural Cycle: 120


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.78
Intersection Signal Delay: 26.8
Intersection Capacity Utilization 74.1%

Intersection LOS: C
ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lane Group Ø9 Permitted Phases Detector Phase Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Detector Phase Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 24%
Total Split (s) 29.0 Total Split (%) 24%
Total Split (%) 24%
Mar 1 (a)
Maximum Green (s) 26.0
Yellow Time (s) 2.0
All-Red Time (s) 1.0
Lost Time Adjust (s)
Total Lost Time (s)
Lead/Lag
Lead-Lag Optimize?
Vehicle Extension (s) 3.0
Recall Mode None
Act Effct Green (s)
Actuated g/C Ratio
v/c Ratio
Control Delay
Queue Delay
Total Delay
LOS
Approach LOS
Approach LOS
Intersection Summary

6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
The form of the form of the first of	44 50/			1/	NIII		Λ.					

Intersection Capacity Utilization 44.5%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	٤	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized	51101					
Intersection Capacity Utilizat	ion 63.3%			IC	III evel	of Service
Analysis Period (min) 15				10	2 20101	J. 501 1100

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type: (Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level o	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	^			
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	•	0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 49.5%			IC	U Level o	of Service
Analysis Period (min) 15				,,,	2 20.010	

Part Twelve: PM Turn Common Road into One-Way Street with Pedestrian Phase Conditions



	۶	→	•	•	←	•	•	†	~	/	+	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	ň	f)			ર્ન	7		4	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.991	
Flt Protected		0.999		0.950				0.987			0.985	
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	0	1843	0
Flt Permitted		0.991		0.950				0.882			0.843	
Satd. Flow (perm)	0	1864	1538	1805	1832	0	0	1615	1583	0	1577	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121		2				259		4	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	73	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	0	237	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	Ţ.		12			0			0	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	CI+Ex	CI+Ex	CI+Ex	Cl+Ex		Cl+Ex	Cl+Ex	CI+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		CI+Ex			CI+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9
—	

	•	-	•	•	←	•	1	†	/	-	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	26.0	26.0	26.0	13.0	39.0		22.0	22.0		22.0	22.0	
Total Split (%)	28.9%	28.9%	28.9%	14.4%	43.3%		24.4%	24.4%		24.4%	24.4%	
Maximum Green (s)	21.0	21.0	21.0	8.0	34.0		17.0	17.0		17.0	17.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Act Effct Green (s)		21.0	21.0	8.0	34.0			17.0	30.0		17.0	
Actuated g/C Ratio		0.34	0.34	0.13	0.56			0.28	0.49		0.28	
v/c Ratio		0.51	0.05	0.98	0.76			0.41	0.28		0.54	
Control Delay		19.4	0.1	86.4	16.8			21.3	2.3		23.6	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		19.4	0.1	86.4	16.8			21.3	2.3		23.6	
LOS		В	Α	F	В			С	Α		С	
Approach Delay		17.8			32.8			10.2			23.6	
Approach LOS		В			С			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 90

Actuated Cycle Length: 61

Natural Cycle: 90


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.98 Intersection Signal Delay: 24.2 Intersection Capacity Utilization 84.1%

Intersection LOS: C
ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lane Group	Ø9	
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	26.0	
Minimum Split (s)	29.0	
Total Split (s)	29.0	
Total Split (%)	32%	
Maximum Green (s)	26.0	
Yellow Time (s)	2.0	
All-Red Time (s)	1.0	
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	
Recall Mode	None	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Intersection Summary		
microodion carrinally		

6: Library Hill Road/Hartley Road & Crescent Street

	٠	→	•	•	—	4	1	†	/	/	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
Area Type:	Other											
Control Type: Unsignalized												
Interception Conneity Litilize	tion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7% ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	۲	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type: C	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1>			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	1}•			
Traffic Volume (vph)	4	553	936	17	0	0
Future Volume (vph)	4	553	936	17	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected						
Satd. Flow (prot)	0	1863	1840	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1863	1840	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	•	0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 53.6%			IC	U Level o	of Service
Analysis Period (min) 15	21. 22.270			,,,	2 20.010	

Part Thirteen: AM Add Permissive Left Turn and Turn Common Road into One-Way Street with Pedestrian Phase Conditions



	۶	→	•	•	←	•	•	†	<i>></i>	/	+	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	7	f.			ર્ન	7	ň	f)	
Traffic Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Future Volume (vph)	3	634	25	81	229	0	15	100	157	71	98	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.991	
Flt Protected				0.950				0.992		0.950		
Satd. Flow (prot)	0	1827	1442	1641	1776	0	0	1754	1583	1736	1798	0
Flt Permitted		0.998		0.950				0.901		0.663		
Satd. Flow (perm)	0	1824	1442	1641	1776	0	0	1593	1583	1211	1798	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121						194		3	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.75	0.97	0.69	0.72	0.83	0.25	0.62	0.82	0.81	0.77	0.50	0.33
Heavy Vehicles (%)	0%	4%	12%	10%	7%	0%	20%	5%	2%	4%	5%	0%
Adj. Flow (vph)	4	654	36	113	276	0	24	122	194	92	196	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	658	36	113	276	0	0	146	194	92	208	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	J
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	CI+Ex	CI+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm		custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9

	۶	→	•	•	←	•	1	†	/	-	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	33.0	33.0	33.0	11.0	44.0		17.0	17.0		17.0	17.0	
Total Split (%)	36.7%	36.7%	36.7%	12.2%	48.9%		18.9%	18.9%		18.9%	18.9%	
Maximum Green (s)	28.0	28.0	28.0	6.0	39.0		12.0	12.0		12.0	12.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		28.7	28.7	6.1	40.0			12.3	23.6	12.3	12.3	
Actuated g/C Ratio		0.43	0.43	0.09	0.60			0.18	0.35	0.18	0.18	
v/c Ratio		0.84	0.05	0.75	0.26			0.50	0.28	0.41	0.62	
Control Delay		31.5	0.2	63.9	9.6			34.6	5.0	34.2	37.5	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		31.5	0.2	63.9	9.6			34.6	5.0	34.2	37.5	
LOS		С	Α	E	Α			С	Α	С	D	
Approach Delay		29.9			25.3			17.7			36.4	
Approach LOS		С			С			В			D	

Intersection Summary

Area Type: Other

Cycle Length: 90

Actuated Cycle Length: 66.8

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.84

Intersection Signal Delay: 27.6 Intersection Capacity Utilization 70.8% ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Lane Group	Ø9		
Permitted Phases			
Detector Phase			
Switch Phase			
Minimum Initial (s)	26.0		
Minimum Split (s)	29.0		
Total Split (s)	29.0		
Total Split (%)	32%		
Maximum Green (s)	26.0		
Yellow Time (s)	2.0		
All-Red Time (s)	1.0		
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag			
Lead-Lag Optimize?	2.0		
Vehicle Extension (s)	3.0		
Recall Mode	None		
Walk Time (s)	7.0		
Flash Dont Walk (s)	19.0		
Pedestrian Calls (#/hr)	5		
Act Effct Green (s) Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Intersection Summary			

6: Library Hill Road/Hartley Road & Crescent Street

	۶	→	•	•	←	•	4	†	/	>	ļ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Future Volume (vph)	61	87	3	142	74	38	1	44	96	24	43	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995			0.964			0.921			0.955	
Flt Protected		0.976			0.976			0.999			0.988	
Satd. Flow (prot)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Flt Permitted		0.976			0.976			0.999			0.988	
Satd. Flow (perm)	0	1793	0	0	1707	0	0	1654	0	0	1676	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.59	0.91	0.38	0.84	0.84	0.41	0.25	0.55	0.82	0.38	0.38	0.36
Heavy Vehicles (%)	3%	3%	0%	4%	8%	3%	0%	7%	5%	4%	7%	9%
Adj. Flow (vph)	103	96	8	169	88	93	4	80	117	63	113	89
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	207	0	0	350	0	0	201	0	0	265	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
	Other											
Control Type: Unsignalized												
1.1	44 50/			1/	NIII		Λ.					

Intersection Capacity Utilization 44.5%

ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	٤	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	160	652	255	1	0	100
Future Volume (vph)	160	652	255	1	0	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.998			0.865
Flt Protected		0.988				
Satd. Flow (prot)	0	1805	1774	0	0	1565
Flt Permitted		0.988				
Satd. Flow (perm)	0	1805	1774	0	0	1565
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.71	0.96	0.87	0.25	0.25	0.69
Heavy Vehicles (%)	4%	4%	7%	0%	0%	5%
Adj. Flow (vph)	225	679	293	4	0	145
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	904	297	0	0	145
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized	51101					
Intersection Capacity Utilizat	ion 63.3%			IC	III evel	of Service
Analysis Period (min) 15				10	2 20101	J. 501 1100

	•	•	†	<i>></i>	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Lane Configurations	¥		1>			4	
Traffic Volume (vph)	0	38	103	0	15	173	
Future Volume (vph)	0	38	103	0	15	173	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Frt	0.865						
Flt Protected						0.996	
Satd. Flow (prot)	1611	0	1863	0	0	1855	
Flt Permitted						0.996	
Satd. Flow (perm)	1611	0	1863	0	0	1855	
Link Speed (mph)	30		30			30	
Link Distance (ft)	666		167			114	
Travel Time (s)	15.1		3.8			2.6	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	41	112	0	16	188	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	41	0	112	0	0	204	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Right	Left	Left	
Median Width(ft)	12		0			0	
Link Offset(ft)	0		0			0	
Crosswalk Width(ft)	16		16			16	
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9		9	15		
Sign Control	Stop		Free			Free	
Intersection Summary							
Area Type: (Other						
Control Type: Unsignalized							
Intersection Capacity Utilizat	tion 26.6%			IC	U Level o	of Service	e A

Intersection Capacity Utilization 26.6%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	^			
Traffic Volume (vph)	1	862	320	11	0	0
Future Volume (vph)	1	862	320	11	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.993			
Flt Protected						
Satd. Flow (prot)	0	1827	1731	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1827	1731	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	0.25	0.95	0.86	0.55	0.25	0.25
Heavy Vehicles (%)	0%	4%	8%	27%	0%	0%
Adj. Flow (vph)	4	907	372	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	911	392	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0	•	0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on 49.5%			IC	U Level o	of Service
Analysis Period (min) 15				,,,	2 20.010	

Part Fourteen: PM Add Permissive Left Turn and Turn Common Road into One-Way Street with Pedestrian Phase Conditions



	۶	→	•	•	←	•	4	†	<i>></i>	/	↓	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ની	7	ሻ	f)			ર્ન	7	ሻ	f)	
Traffic Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Future Volume (vph)	2	313	21	211	707	7	34	101	181	65	126	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		350	0		0	0		0	0		0
Storage Lanes	0		1	1		0	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.996				0.850		0.985	
Flt Protected		0.999		0.950				0.987		0.950		
Satd. Flow (prot)	0	1880	1538	1805	1832	0	0	1807	1583	1805	1855	0
Flt Permitted		0.991		0.950				0.867		0.578		
Satd. Flow (perm)	0	1864	1538	1805	1832	0	0	1587	1583	1098	1855	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			121		2				259		5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		588			581			410			167	
Travel Time (s)		13.4			13.2			9.3			3.8	
Peak Hour Factor	0.50	0.96	0.71	0.91	0.93	0.35	0.71	0.74	0.70	0.89	0.85	0.50
Heavy Vehicles (%)	0%	1%	5%	0%	3%	14%	6%	3%	2%	0%	1%	0%
Adj. Flow (vph)	4	326	30	232	760	20	48	136	259	73	148	16
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	330	30	232	780	0	0	184	259	73	164	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12	, i		12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex		Cl+Ex	CI+Ex	CI+Ex	CI+Ex	CI+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			CI+Ex			Cl+Ex			CI+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA	Perm	Prot	NA		Perm	NA	custom	Perm	NA	
Protected Phases		4		3	8			2			6	

Lane Group Ø9 Lane Configurations Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphp) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (prot) Fit Permitted Satd. Flow (prm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft) Link Offset(ft) Crosswalk Width(ft) Link Offset(ft) Crosswalk Width(ft)	Lane Configurations	
Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ff) Crosswalk Width(ft)		
Future Volume (vphp) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ff) Crosswalk Width(ft)	Traffic Volume (vph)	
Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Filt Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Storage Lanes Taper Length (ft) Lane Util. Factor Frt Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Distance (ft) Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Travel Time (s) Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Peak Hour Factor Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)	. ,	
Heavy Vehicles (%) Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Enter Blocked Intersection Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Lane Alignment Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Median Width(ft) Link Offset(ft) Crosswalk Width(ft)		
Link Offset(ft) Crosswalk Width(ft)		
Crosswalk Width(ft)		
	. ,	
Two way Left Turn Lane		
Headway Factor Turning Speed (mph)		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft) Todiling Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type	T T	
Protected Phases 9		-

	•	-	•	•	•	•	1	†	/	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		4		8		2		23	6		
Detector Phase	4	4	4	3	8		2	2	23	6	6	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	27.0	27.0	27.0	16.0	43.0		18.0	18.0		18.0	18.0	
Total Split (%)	30.0%	30.0%	30.0%	17.8%	47.8%		20.0%	20.0%		20.0%	20.0%	
Maximum Green (s)	22.0	22.0	22.0	11.0	38.0		13.0	13.0		13.0	13.0	
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0	5.0	5.0	5.0			5.0		5.0	5.0	
Lead/Lag	Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None	None	None	None		Max	Max		Max	Max	
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		22.3	22.3	11.3	38.7			13.3	29.7	13.3	13.3	
Actuated g/C Ratio		0.33	0.33	0.17	0.58			0.20	0.45	0.20	0.20	
v/c Ratio		0.53	0.05	0.76	0.73			0.58	0.30	0.33	0.44	
Control Delay		24.2	0.1	47.1	18.7			36.0	3.7	31.3	29.5	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0	0.0	0.0	
Total Delay		24.2	0.1	47.1	18.7			36.0	3.7	31.3	29.5	
LOS		С	Α	D	В			D	Α	С	С	
Approach Delay		22.2			25.2			17.1			30.1	
Approach LOS		С			С			В			С	

Intersection Summary

Area Type: Other

Cycle Length: 90

Actuated Cycle Length: 66.6

Natural Cycle: 90


Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.76

Intersection Signal Delay: 23.5 Intersection LOS: C
Intersection Capacity Utilization 85.2% ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 3: Gleasondale Road (Route 62)/Library Hill Road & Great Road (Route 117)



Permitted Phases Detector Phase Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS Intersection Summary
Switch Phase Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Minimum Initial (s) 26.0 Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Minimum Split (s) 29.0 Total Split (s) 29.0 Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Total Split (s) 29.0 Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Total Split (%) 32% Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach LOS
Maximum Green (s) 26.0 Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Yellow Time (s) 2.0 All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
All-Red Time (s) 1.0 Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Lost Time Adjust (s) Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) Recall Mode Walk Time (s) Flash Dont Walk (s) Pedestrian Calls (#/hr) Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Total Lost Time (s) Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Lead/Lag Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Lead-Lag Optimize? Vehicle Extension (s) 3.0 Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Vehicle Extension (s) Recall Mode None Walk Time (s) Flash Dont Walk (s) Pedestrian Calls (#/hr) Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Recall Mode None Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Walk Time (s) 7.0 Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Flash Dont Walk (s) 19.0 Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Pedestrian Calls (#/hr) 5 Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
v/c Ratio Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Control Delay Queue Delay Total Delay LOS Approach Delay Approach LOS
Queue Delay Total Delay LOS Approach Delay Approach LOS
Total Delay LOS Approach Delay Approach LOS
LOS Approach Delay Approach LOS
Approach Delay Approach LOS
Approach LOS
Intersection Summary

6: Library Hill Road/Hartley Road & Crescent Street

	٠	→	•	•	—	4	1	†	/	/	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Future Volume (vph)	29	102	7	114	121	17	3	35	96	29	52	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.987			0.916			0.952	
Flt Protected		0.989			0.980			0.998			0.989	
Satd. Flow (prot)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Flt Permitted		0.989			0.980			0.998			0.989	
Satd. Flow (perm)	0	1739	0	0	1795	0	0	1644	0	0	1789	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		563			543			114			298	
Travel Time (s)		12.8			12.3			2.6			6.8	
Peak Hour Factor	0.68	0.77	0.50	0.86	0.77	0.55	0.38	0.62	0.91	0.56	0.56	0.64
Heavy Vehicles (%)	3%	9%	0%	1%	4%	0%	67%	0%	4%	0%	0%	0%
Adj. Flow (vph)	43	132	14	133	157	31	8	56	105	52	93	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	189	0	0	321	0	0	169	0	0	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	
Intersection Summary												
Area Type:	Other											
Control Type: Unsignalized												
Interception Conneity Litilize	tion 15 70/			10	III ovol 4	of Conside	. ^					

Intersection Capacity Utilization 45.7% ICU Level of Service A

Analysis Period (min) 15

	_#	→	←	۲	6	✓
Lane Group	EBL	EBT	WBT	WBR	SWL	SWR
Lane Configurations		ર્ન	1>			7
Traffic Volume (vph)	87	320	780	3	1	126
Future Volume (vph)	87	320	780	3	1	126
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.999			0.865
Flt Protected		0.987			0.950	
Satd. Flow (prot)	0	1835	1861	0	0	1627
Flt Permitted		0.987			0.950	
Satd. Flow (perm)	0	1835	1861	0	0	1627
Link Speed (mph)		30	30		30	
Link Distance (ft)		225	588		563	
Travel Time (s)		5.1	13.4		12.8	
Peak Hour Factor	0.70	0.96	0.94	0.38	0.25	0.85
Heavy Vehicles (%)	0%	3%	2%	0%	0%	1%
Adj. Flow (vph)	124	333	830	8	4	148
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	457	838	0	4	148
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
Area Type: C	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	on Err%			IC	U Level	of Service
Analysis Period (min) 15						

	•	•	†	/	>	↓
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		1>			4
Traffic Volume (vph)	25	24	110	0	0	173
Future Volume (vph)	25	24	110	0	0	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.934					
Flt Protected	0.975					
Satd. Flow (prot)	1696	0	1863	0	0	1863
Flt Permitted	0.975					
Satd. Flow (perm)	1696	0	1863	0	0	1863
Link Speed (mph)	30		30			30
Link Distance (ft)	666		167			114
Travel Time (s)	15.1		3.8			2.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	26	120	0	0	188
Shared Lane Traffic (%)						
Lane Group Flow (vph)	53	0	120	0	0	188
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	12		0			0
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9		9	15	
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						

ICU Level of Service A

Intersection Capacity Utilization 19.1%
Analysis Period (min) 15

	*	→	←	*_	\	4
Lane Group	EBL	EBT	WBT	WBR	SEL	SER
Lane Configurations		4	1}•			
Traffic Volume (vph)	4	553	936	17	0	0
Future Volume (vph)	4	553	936	17	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.997			
Flt Protected						
Satd. Flow (prot)	0	1863	1840	0	0	0
FIt Permitted						
Satd. Flow (perm)	0	1863	1840	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		581	351		666	
Travel Time (s)		13.2	8.0		15.1	
Peak Hour Factor	1.00	0.86	0.93	0.85	0.25	0.25
Heavy Vehicles (%)	0%	2%	3%	0%	0%	0%
Adj. Flow (vph)	4	643	1006	20	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	647	1026	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	•
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15			9	15	9
Sign Control		Free	Free		Stop	
Intersection Summary						
· · · · · · · · · · · · · · · · · · ·	Other					
Control Type: Unsignalized						
Intersection Capacity Utilizati	ion 53.6%			IC	U Level o	of Service
Analysis Period (min) 15					2 20.010	